

PATHWAYS Wall Sconce

oxygen

120v : **3-523-xxx**

277v : **37-523-xxx**

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____



-95 Old World



-24 Satin Nickel

Diffusers:



-2 Matte White Acrylic




-3 Tobacco Acrylic



-6 Silver Cloth Acrylic

LIGHT SOURCE	1 x 10.1W LED, 3000K, CRI 90
LUMINAIRE POWER	12.9W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: (-2) Acrylic: 1m (LM-79) (-3) Acrylic: 836 lm (LM-79) (-6) Acrylic: 527 lm (LM-79)
INPUT VOLTAGE	120V or 277V
DRIVER OUTPUT	350mA, 12W
DIMMING	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
CONSTRUCTION	Plated Steel and Acrylic
METAL FINISH / DIFFUSER	(-224) Matte White Acrylic / Satin Nickel (-295) Matte White Acrylic / Old World (-324) Tobacco Acrylic / Satin Nickel (-395) Tobacco Acrylic / Old World (-624) Silver Cloth Acrylic / Satin Nickel (-695) Silver Cloth Acrylic / Old World
MOUNTING	4" Octagonal J-Box
STANDARDS	ETL Dry/Damp listed, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

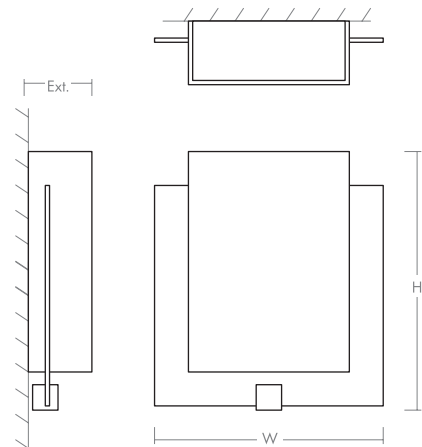

DIMENSIONS

W:	13.63"
H:	14.89"
Ext:	3.75"
M.C:	6.41" From top of fixture

Order example for standard fixture:

3-523-24 (x- Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)

3: 120v, **37:** 277v

Order example for optional color temperatures: **3-523-2724**

27: 2700K, **35:** 3500K, **40:** 4000K

