

ZETA Wall Sconce / Ceiling Mount

120v: **3-530-xx**

277v: **37-530-xx**

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____



-40 Aged Brass




-22 Oiled Bronze



-24 Satin Nickel

LIGHT SOURCE	1 x 8.2W LED, 3000K, CRI 90
LUMINAIRE POWER	10.3W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 361 lm (LM-79)
INPUT VOLTAGE	120V or 277V
DRIVER OUTPUT	350mA, 12W
DIMMING	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
CONSTRUCTION	Plated Steel and Acrylic
DIFFUSER	- Matte White Acrylic
FINISHES	Oiled Bronze (-22), Satin Nickel (-24), Aged Brass (-40)
MOUNTING	4" Octagonal J-Box, 2"x3" J-Box.
STANDARDS	ETL Dry/Damp listed, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

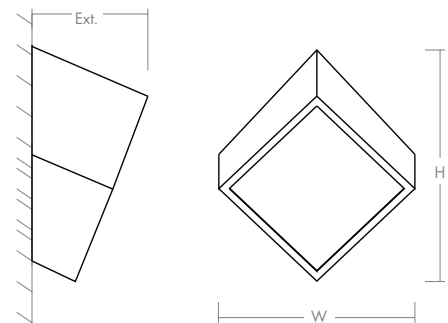

DIMENSIONS

W: 6.63"

H: 7.78"

Ext: 4.00"

M.C: 3.59" From top of fixture

Order example for standard fixture:

3-530-22 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v, 37: 277v

Order example for optional color temperatures: **3-530-2722**

27: 2700K, 35: 3500K, 40: 4000K

