

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Fiction

Outdoor Wall Sconce 3000K

Model & Size	Color Temp & CRI	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W11914 14"	3000K 90	9W	120-277 VAC	788	445	BK Black

Example: **WS-W11914-BK**

DESCRIPTION

Modern elegance in a powerful, iconic design.

FEATURES

- Front lit etched acrylic panel design
- Driver concealed within the fixture
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%, 0-10V: 100 - 10%, TRIAC: 100 - 10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on wall vertically or upside down
Standards:	ETL, cETL, IP65, Title 24 JA8-2016 Compliant Wet Location Listed
Construction:	Aluminum body with acrylic diffuser




FINISHES



Black

LINE DRAWING

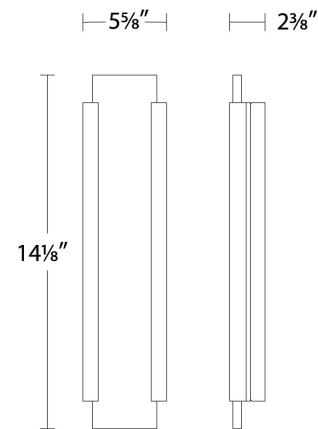

WS-W11914

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Fiction

Outdoor Wall Sconce 3000K

Model & Size	Color Temp & CRI	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W11920 20"	3000K 90	15W	120-277 VAC	1666	758	BK Black

Example: **WS-W11920-BK**

DESCRIPTION

Modern elegance in a powerful, iconic design.

FEATURES

- Front lit etched acrylic panel design
- Driver concealed within the fixture
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%, 0-10V: 100 - 10%, TRIAC: 100 - 10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on wall vertically or upside down
Standards:	ETL, cETL, IP65, Title 24 JA8-2016 Compliant Wet Location Listed
Construction:	Aluminum body with acrylic diffuser




FINISHES



Black

LINE DRAWING

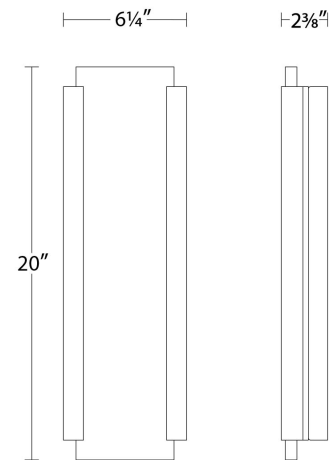

WS-W11920

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Fiction

Outdoor Wall Sconce 3000K

Model & Size	Color Temp & CRI	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W11926 26"	3000K 90	20W	120-277 VAC	2855	1132	BK Black

Example: **WS-W11926-BK**

DESCRIPTION

Modern elegance in a powerful, iconic design.

FEATURES

- Front lit etched acrylic panel design
- Driver concealed within the fixture
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%, 0-10V: 100 - 10%, TRIAC: 100 - 10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on wall vertically or upside down
Standards:	ETL, cETL, IP65, Title 24 JA8-2016 Compliant Wet Location Listed
Construction:	Aluminum body with acrylic diffuser




FINISHES



Black

LINE DRAWING

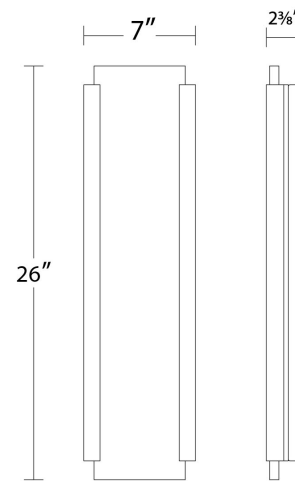

WS-W11926