

Contour

The Contour's compact size ensures a discreet and unobtrusive appearance while providing ample illumination for small to medium-sized areas. Its sleek and modern design seamlessly integrates into hardscape elements such as walls, steps, and patios. Crafted with high-quality materials, this fixture is built to withstand the elements, ensuring long-lasting durability and performance.


NEW

2200k 2700k 3000k 3500k 4000k

COLOR TEMPERATURE

WET

ETL Intertek

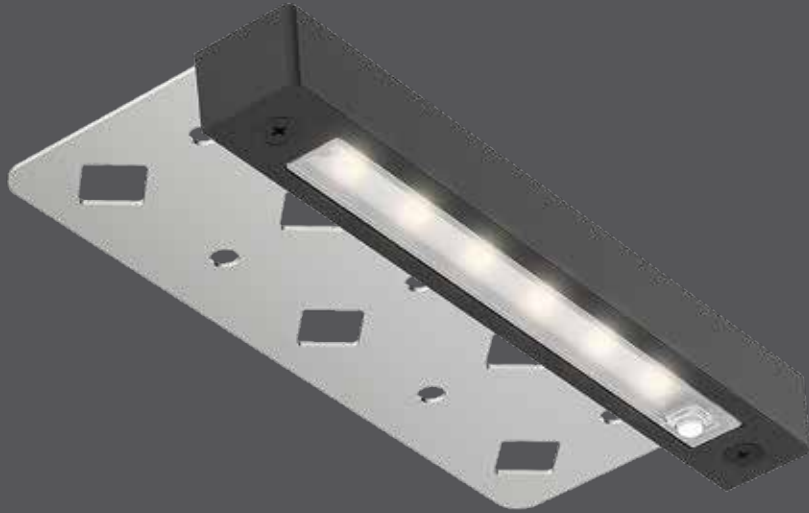

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LHS07-CC	7"	3 W	200 lm	80	2200, 2700, 3000, 3500, 4000 K	12 VAC

Specifications

Over 50,000 hours of service life
 12VAC input
 110° beam angle
 Frosted lens
 Can be mounted to wood or concrete
 Aluminum construction
 Surface or recessed installation
 Switch-selectable CCT: 2200 K/2700 K/
 3000 K/3500 K/4000 K
 Suitable for wet locations
 5-year warranty

Note

Low-voltage transformer required.
 Sold separately.

Other color °T and finishes available, but
 may require MOQ's and longer lead times.
 Please contact your DALs representative
 for more information.

Finish

● **BK** Black

Power supplies

LTRP-60-BK

60W, 120VAC 60Hz input
 12VAC output low-voltage transformer

LTR-300-BK

300W, 120VAC 60Hz input
 12/13/14/15VAC output low-voltage
 transformer

Accessories

LCBL-50-16

50 feet of 16 gauge low-voltage wiring

LCBL-100-16

100 feet of 16 gauge low-voltage wiring

LCBL-50-14

50 feet of 14 gauge low-voltage wiring

LCBL-100-14

100 feet of 14 gauge low-voltage wiring

LCBL-100-12

100 feet of 12 gauge low-voltage wiring

LCBL-200-12

200 feet of 12 gauge low-voltage wiring

LHS07-CC

