



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Post LED Sconce PTS Series



Features

Modern design featuring a combination of metal and painted finish. Indirect illumination. Provides lighting in residential, commercial and hospitality applications. Vertical or horizontal mounting. Meets ADA requirements. Requires a rectangular 2 in x 4 in. handy box for installation (not included).

Construction

Die-cast metal diffuser bracket, stamped metal backplate. Standard mounting holes and hardware are included. Power supply connections must be made inside a handy box (not included).

Finish

Satin Brass finish with Black paint, Satin Nickel finish with Dark Grey paint and Satin Nickel finish with White paint.

Diffuser

White acrylic.

Electrical

Input 120 VAC / 60 Hz.
Compatible with residential TRIAC and ELV dimming.

LED

Integrated LED modules capable of producing:
15.5W = 1200 source lumens, 425 delivered lumens
3000K (CCT). Rated for 50,000 Hrs., 90 CRI.


Certification

All fixtures are cULus listed for damp locations.
ADA

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.


Specifications and dimensions
subject to change without notice.

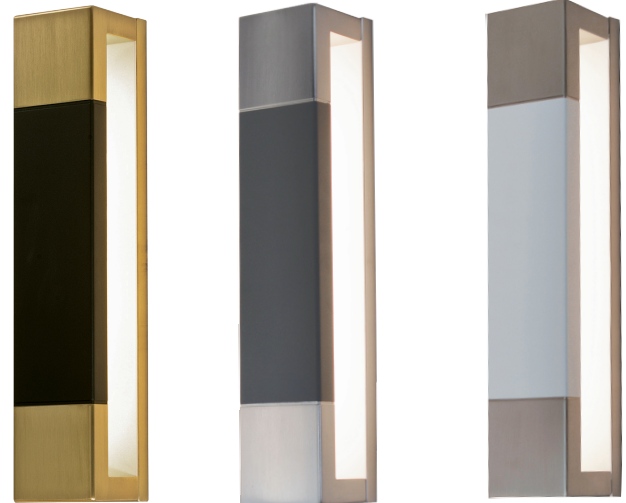

Satin Brass/Black

Satin Nickel/Dark Grey

Satin Nickel/White

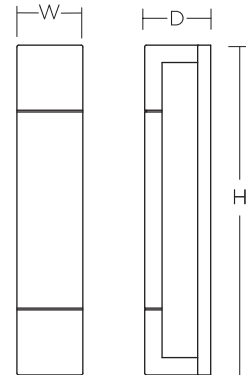

Ordering Information:

Satin Brass/Black	Satin Nickel/Dark Grey	Satin Nickel/White	LED	Source Lumens	Delivered Lumens	CCT	H	W	D	
PTS3151200L30D1SBBK	PTS3151200L30D1SNGY	PTS3151200L30D1SNWH		15.5W	1200	425	3000K	13-1/2"	3"	3-1/2"