




JOB NAME _____

CONTACT _____

ORDERING CODE _____

BINA Bina Pendant Round

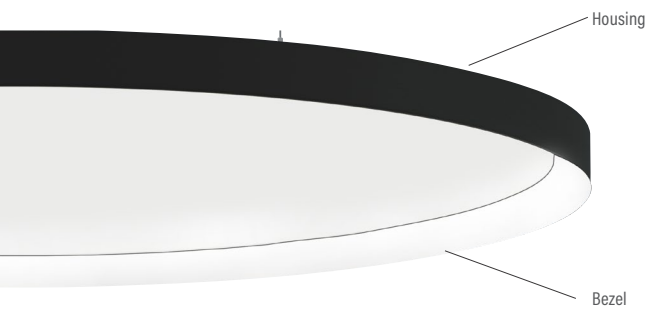

DESCRIPTION

- Slim aluminum luminaire
- Black, white or matte chrome
- Black, white, or matte chrome decorative bezel
- Ultra thin 1.5" profile

ELECTRICAL/CONTROLS

- 30, 40, 60, 78 Watt Direct Systems
- 45, 55, 86, 104 Watt Direct/Indirect Systems
- 120-277Vac, 50/60Hz input
- 0-10V Dimming to 1%

LISTING

- IP20 rating
- ETLus Listed to UL1598 (suitable for indoor use and dry locations only)
- cETL Listed to CSA C22.2 #250.0

LED INFO

- LED: Luminus MP Series
- SDCM: 3-step Mac Adam Ellipse
- CCT: 2700K, 3000K or 3500K
- CRI: >80
- Lumen Maintenance: L₇₀ > 50,000 hrs


ORDERING CODE		
SERIES	BINA-P	bina pendant
TYPE	RD	round
CCT	27K	2700K
	30K	3000K
	35K	3500K
SIZE	16	D 16"
	24	D 24"
	32	D 32"
	40	D 40"
CURRENT	325	325mA
	500	500mA
	675	675mA
	850	850mA
	1050	1050mA
LIGHT OUTPUT	D	direct only
	DI	direct/indirect
HOUSING COLOR	BK	black
	WH	white
	MC	matte chrome
BEZEL COLOR	BK	black
	WH	white
	MC	matte chrome
CANOPY COLOR	BK	black
	WH	white
	MC	matte chrome

ORDERING CODE _____


Follow the steps to specify your fixture, example:
BINA-P-RD-27K-32-500-D-WH-BK-BK

DIRECT (3000K)					
SIZE	325MA	500MA	675MA	850MA	1050MA
16"	880lm / 11W	1360lm / 16W	1800lm / 20W	2230lm / 25W	2720lm / 32W
24"	1230lm / 13W	1900lm / 20W	2510lm / 27W	3115lm / 34W	3790lm / 42W
32"	1830lm / 21W	2830lm / 33W	3750lm / 43W	4640lm / 53W	5650lm / 63W
40"	2435lm / 27W	3770lm / 42W	4960lm / 54W	6145lm / 67W	7510lm / 82W

INDIRECT (3000K)					
SIZE	325MA	500MA	675MA	850MA	1050MA
16" / 24"	525lm / 6W	790lm / 8W	1050lm / 10W	1300lm / 12W	1575lm / 15W
32" / 40"	860lm / 9W	1330lm / 14W	1800lm / 18W	2270lm / 23W	2900lm / 28W

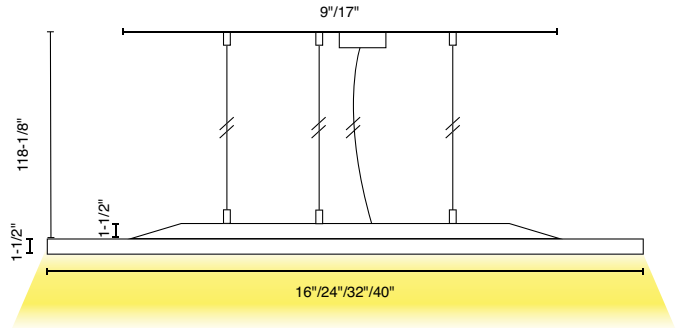

Direct

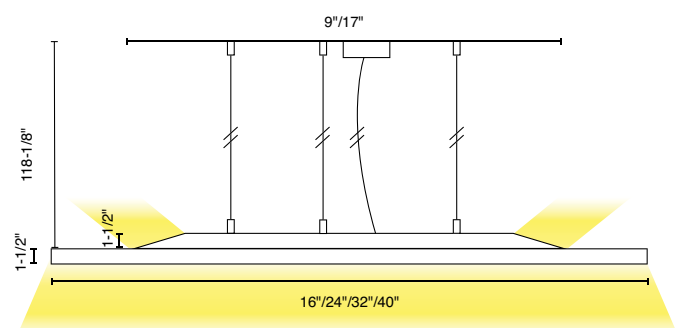

Direct/Indirect