


A19LED301-6PK

CRI 80 2000K 300 Lumens Filament LED bulb



Performance

- LED bulb is designed to provide 15000 hours of life
- Energy-saving & Super bright, saving 75% energy compared
- ETL and FCC compliant, for use indoor only.

Construction

- IP20 Waterproof

Installation

- To ensure safety, please disconnect power before installation and changing Bulb.
- Size:Φ2.36" *H4"




Specifications

Category	Light Bulb	Individual Box Weight Per Unit (Lbs)	0.13
Shape	A19	Inner Package Length (Inch)	8.12
Bulb Base Type	E26	Inner Package Width (Inch)	5.44
Bulb Base Finish	Gold	Inner Package Height (Inch)	5.52
Color Temperature	2000K	Inner Package Weight Per Unit (Lbs)	1
Beam Angle	360°	Inner Package Quantity	6
Finish	Amber		
CRI	80		
Average Life (Hours)	15000		
Estimated Yearly Energy Cost (11 ¢ /Kwh)	0.72		
Life Based On 3Hrs/Day (Years)	13.7		
Product Length (Inch)	N/A	Lamp Type	LED filament
Product Width (Inch)	2.36	Bulb Shape	A Lamp
Product Height (Inch)	4	Dry/Wet/Damp	Dry
Product Extension (Inch)	N/A	Energy Star	NO
Product Weight Per Unit (Lbs)	0.07	Power Factor	0.8
Dimmable	Yes	Current	55mA
Watts	6	Lumen/Watt	50
Watt Equivalent	40	Warranty (Year)	2
Lumens	300	DLC (Yes/No)	No
Certification (UL/ETL/FCC)	ETL	Input Voltage	120V;60Hz
Individual Box Length (Inch)	2.56	Housing Material	Glass
Individual Box Width (Inch)	2.56	Lens	Amber Glass
Individual Box Height (Inch)	5.12	Led Type	San'an



A19LED301-6PK

CRI 80 2000K 300 Lumens LED Filament Bulb




Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
		2000	1000	500	<=300	<=300	<=300	<=300	<=300
1.15	A	2000	1000	500	<=300	<=300	<=300	<=300	<=300
1.50	B		2000	1000	500	<=300	<=300	<=300	<=300
1.85	C			2000	1000	500	<=300	<=300	<=300
2.20	D				2000	1000	500	<=300	<=300
2.55	E					2000	1000	500	<=300

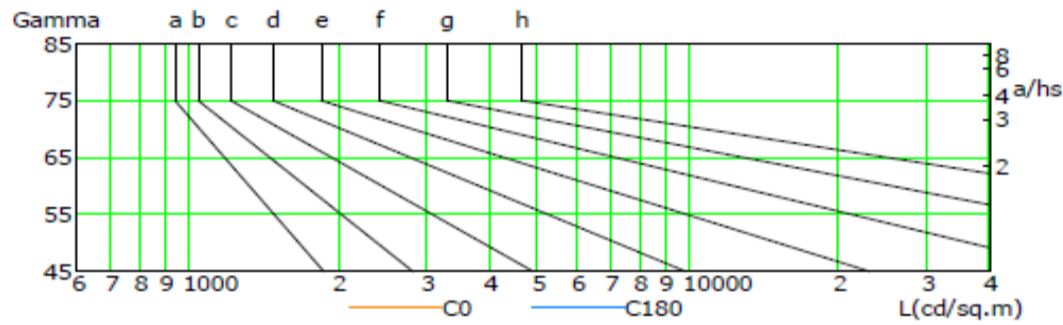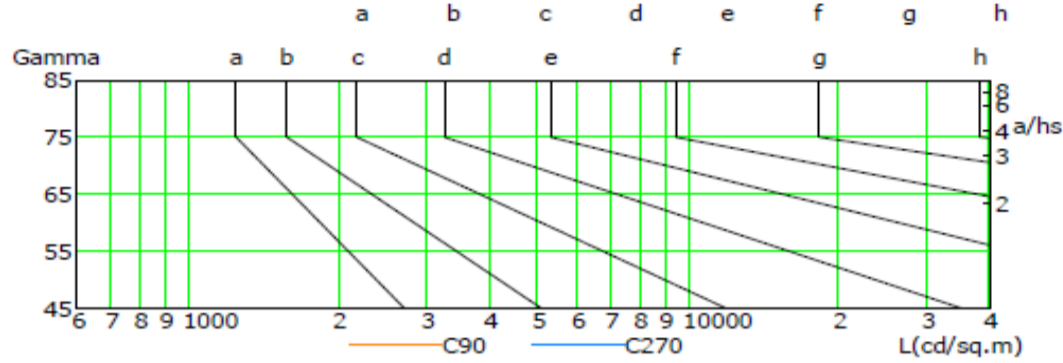

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	28	27	27	26	26	27	26	25	25
C90	27	27	27	26	25	25	25	25	26
C180	29	28	27	26	25	25	25	26	25
C270	27	28	29	28	28	28	27	27	28


Luminous Intensity Distribution Curve

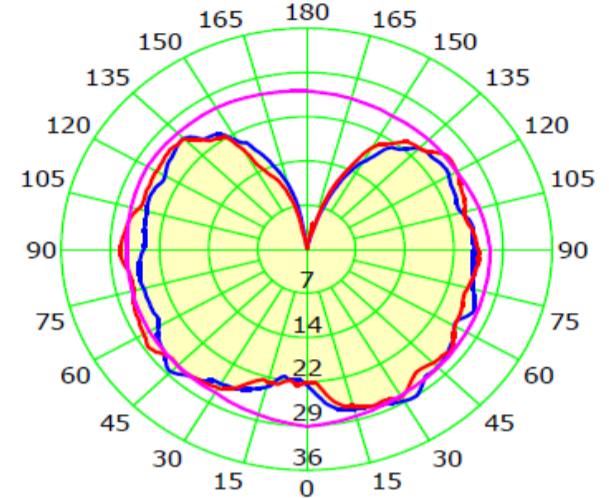

Average Diffuse Angle(50%): 312.0° Unit: cd

— C0-C180 — C90-C270 — G34

The Average Illuminance Effective Figure

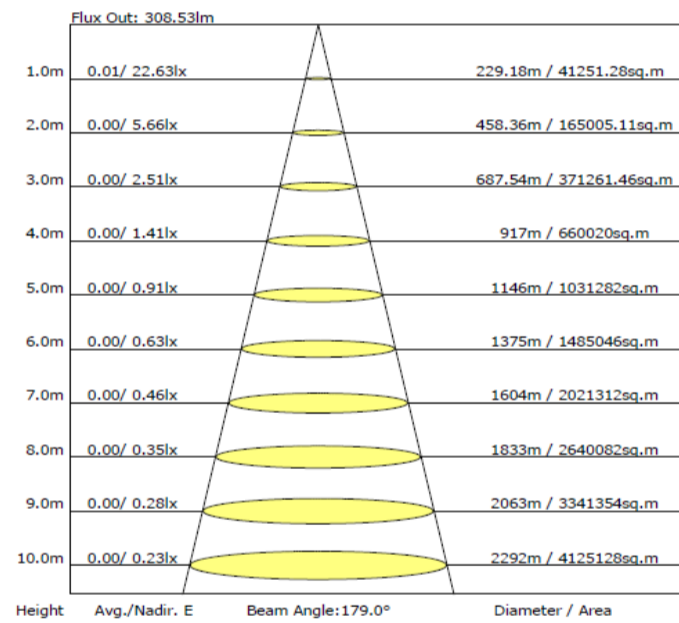

Dimmer Types

Brand	Model#
LEVITON	6672-1LW
LEVITON	6674-P0W
LUTRON	S-600P-WH
LUTRON	MACL-153M-WH
LUTRON	DVCL-153P-WH
LUTRON	D-600PH-3CK
LUTRON	D-600PH-DK
LUTRON	D-600R