


Assembly Instruction Sheet #IS-9611P11 For Style 9611P11

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.
Light Source: (1) E26 Candleless Base Bulb 60W (Manufacturer's Include)
Estimated Assembly Time: 20-30 minutes
Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

Warnings and Cautions
 Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt. These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation. Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Package Contents

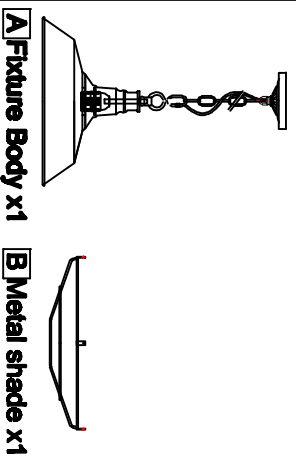

| Hardware Contents | | |
|-------------------|------------------|----------|
| PART | DESCRIPTION | QUANTITY |
| BB | Wire Nut | 2pcs |
| EE | Outlet Box Screw | 2pcs |



STEP 1 - Install the Canopy Chain Loop and Nipple

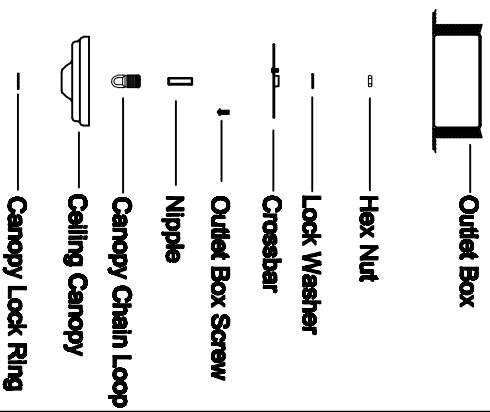


Figure 1

STEP 2 - Install the Fixture Chain and Ceiling Canopy

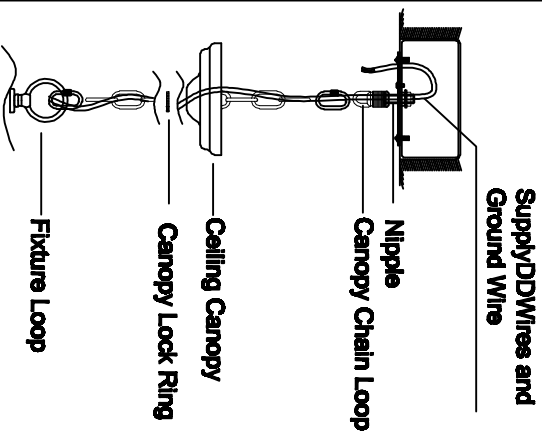


Figure 2

STEP 3 - Wire Connections

A. Use standard wire connectors (not included) to make all wire connections. T-wire connectors (not included) are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

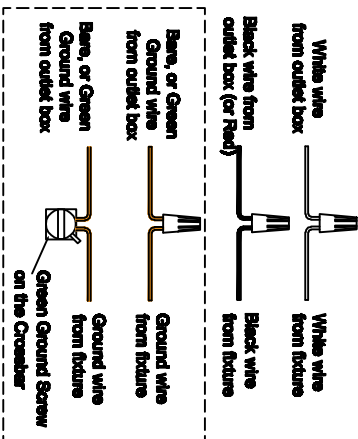


Figure 3

STEP 4 - Install Bulbs and Metal shade.

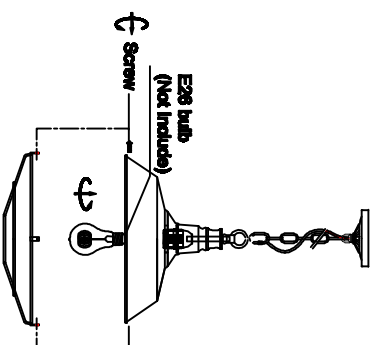


Figure 4