

WAC LIGHTING

VENTRIX Stealth Cube


Fixture Type: _____

Catalog Number: _____


Project: _____

Location: _____

System	Model	Power	Beam	Color Temp	CRI	Lumens	CBCP	Housing Finish	Trim Finish			
S2	SCA-1	15W	S 20°	927	2700K	90	1235	5055	BK	Black	BK	Black
				930	3000K				CH	Chrome	CH	Chrome
				935	3500K				GL	Gold	GL	Gold
				940	4000K				HZ	Haze	HZ	Haze
	SCB-1	N 38°	927	2700K	90	1165	2160	BK	Black	BK	Black	
			930	3000K				CH	Chrome	CH	Chrome	
			935	3500K				GL	Gold	GL	Gold	
			940	4000K				HZ	Haze	HZ	Haze	
	SCC-1	F 50°	927	2700K	90	1290	1850	BK	Black	BK	Black	
			930	3000K				CH	Chrome	CH	Chrome	
			935	3500K				GL	Gold	GL	Gold	
			940	4000K				HZ	Haze	HZ	Haze	
								WT	White	WT	White	

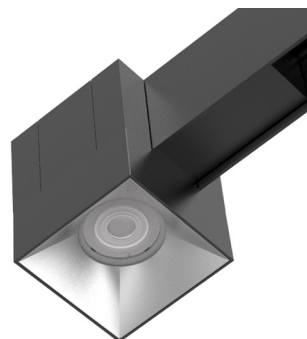


Example: S2SCC-1-F930BKHZ



Configuration "A" for mid-channel surface or suspended VENTRIX systems




Configuration "B" for L, X, T or end of run channel locations on surface or suspended VENTRIX systems



Configuration "C" for recessed trim or trimless VENTRIX systems

FINISHES



Black Chrome Gold Haze White

PRODUCT DESCRIPTION

Installed anywhere along a channel or side by side in pairs, Stealth Cube and Tube provide beautiful, glare-free illumination. They can be adjusted with various optics and trims in the field to raise the level of design customization.

FEATURES

- Low glare trim with 25° shielding angle
- Interchangeable trim available in 5 finishes
- May be installed side by side or at L, X, T or end of run locations of VENTRIX channel
- Stealth Cube may be installed in surface, suspended or recessed VENTRIX system
- To enable access to VENTRIX element releasing tabs, maintain at least 3" of free channel space
- Driver concealed within the fixture
- 5 year warranty


CUBE REPLACEMENT TRIMS

Black Trim	REF-S2SC-BK
Chrome Trim	REF-S2SC-CH
Gold Trim	REF-S2SC-GL
Haze Trim	REF-S2SC-HZ
White Trim	REF-S2SC-WT

SPECIFICATIONS

Construction:	Die-cast aluminum with injection molded low glare trim
Power:	15W
Input:	48 VDC
Dimming:	ELV: 100-0.1%, TRIAC: 100-0.1%, 0-10V: 100-0.1%
Light Source:	Integrated LED, 3 Step Mac Adam Ellipse
Rated Life:	50000 Hours
Mounting:	Installs magnetically and mechanically into VENTRIX system, can be mounted on ceiling or wall vertically or horizontally
Finish:	Injection Molded Polycarbonate: Black, Chrome, Gold, Haze, White
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL, cUL, Dry Location Listed, Title 24 JA8-2019 Compliant

LINE DRAWING

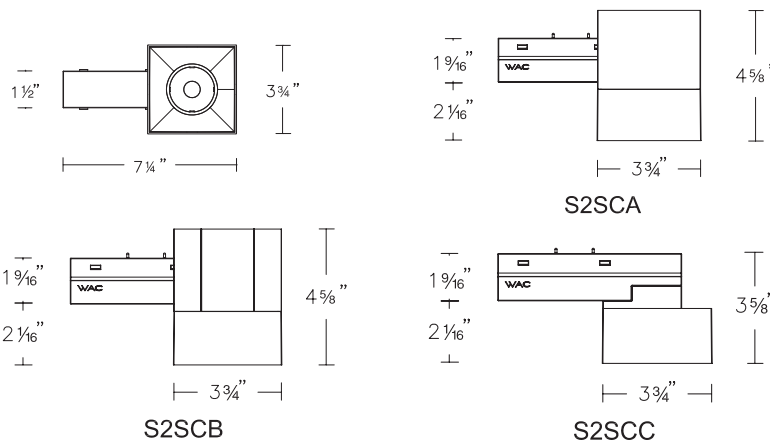

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters, East Manufacturing Facility

44 Harbor Park Drive

Port Washington, NY 11050

South East Manufacturing Facility

1600 Distribution Ct

Lithia Springs, GA 30122

Central Manufacturing Facility

1700 South J Elmer Freeway, Ste 100

Cedar Hill, TX 75104

West Manufacturing Facility

1750 S Archibald Ave

Ontario, CA 91761