

FM-4207


Project: _____

Location: _____

Fixture Type: _____

Catalog Number: _____

AVAILABLE FINISHES:



Argo

FM-4207

PRODUCT DESCRIPTION

A simple and perfect form. Round out your lighting design with this luminaire that flush mounts directly to your ceiling or wall for a clean look and super illumination, thanks to advanced technology featuring efficient LED lighting. A curvaceous silhouette that will brighten your social circle.

FEATURES

- Driver concealed within the fixture
- 1" profile, edge-lit illumination
- The integrated driver is inside of fixture

SPECIFICATIONS

Rated Life	60000 Hours
Standards	ETL, cETL, Damp Location Listed, Title 24 JA8: 2019 Compliant, Energy Star 2.0
Input	120 VAC, 120-277V, 50/60Hz
Driver Dimension	2.0" x 1.4" x 1.0"
Dimming	ELV: 100-10%, TRIAC: 100-5%
Mounting	Can be mounted on ceiling or wall in all orientations
Color Temp	3000K, 2700K, 3500K
CRI	90
Construction	Aluminum body with acrylic diffuser


REPLACEMENT PARTS

HDW-LX20-MA - Hardware Pack

Model & Size	Color Temp & CRI	Finish	Watt	Voltage	LED Lumens	Delivered Lumens
FM-4207 7"	2700K 90	BK Black	14.9W	120-277V 120 VAC	1391	994 1029 1002
	3500K 90	BN Brushed Nickel				
	3000K 90	WT White				

Example: **FM-4207-WT**

For custom requests please contact customs@modernforms.com

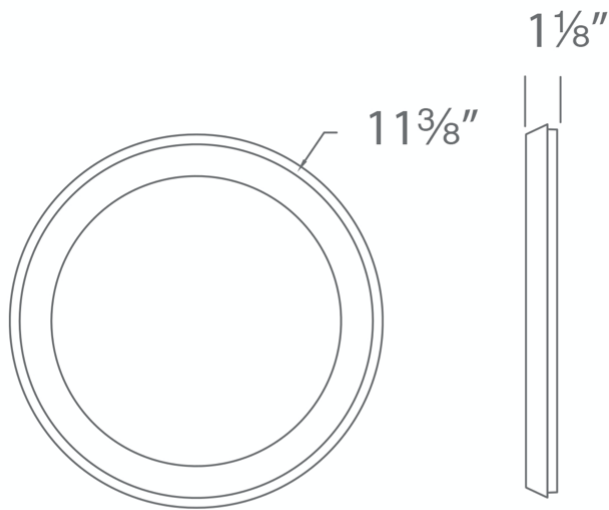

FM-4211


Project: _____

Location: _____

Fixture Type: _____

Catalog Number: _____

AVAILABLE FINISHES:



Argo

FM-4211

PRODUCT DESCRIPTION

A simple and perfect form. Round out your lighting design with this luminaire that flush mounts directly to your ceiling or wall for a clean look and super illumination, thanks to advanced technology featuring efficient LED lighting. A curvaceous silhouette that will brighten your social circle.

FEATURES

- Driver concealed within the fixture
- 1" profile, edge-lit illumination
- The integrated driver is inside of fixture

SPECIFICATIONS

Rated Life	60000 Hours
Standards	ETL, cETL,Damp Location Listed, Title 24 JA8: 2019 Compliant, Energy Star 2.0
Input	120 VAC, 120-277V, 50/60Hz
Dimming	ELV: 100-10%, TRIAC: 100-5%
Mounting	Can be mounted on ceiling or wall in all orientations
Color Temp	2700K, 3000K, 3500K
CRI	90
Construction	Aluminum body with acrylic diffuser
Driver Dimension	2.0" x 1.4" x 1.0"


REPLACEMENT PARTS

HDW-LX20-MA - Hardware Pack

Model & Size	Color Temp & CRI	Finish	Watt	Voltage	LED Lumens	Delivered Lumens
FM-4211 11"	2700K 90	BK Black	20.6W	120-277V	2109	1461
	3500K 90	BN Brushed Nickel	19.8W	120 VAC		1472
	3000K 90	WT White				1521

Example: **FM-4211-WT**

For custom requests please contact customs@modernforms.com

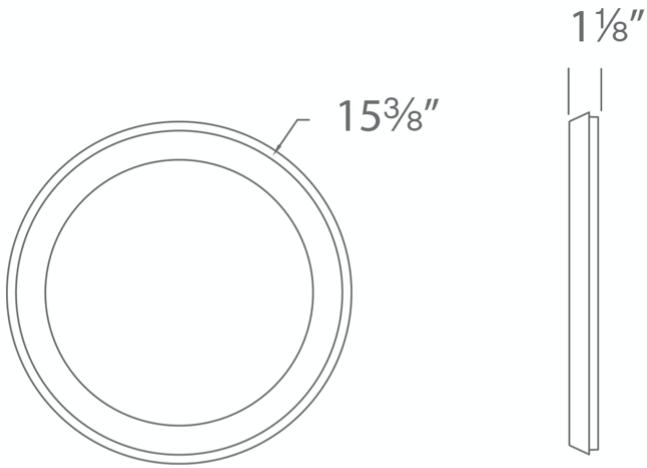

FM-4215


Project: _____

Location: _____

Fixture Type: _____

Catalog Number: _____

AVAILABLE FINISHES:



Argo

FM-4215

PRODUCT DESCRIPTION

A simple and perfect form. Round out your lighting design with this luminaire that flush mounts directly to your ceiling or wall for a clean look and super illumination, thanks to advanced technology featuring efficient LED lighting. A curvaceous silhouette that will brighten your social circle.

FEATURES

- Driver concealed within the fixture
- 1" profile, edge-lit illumination
- The integrated driver is inside of fixture

SPECIFICATIONS

Rated Life	60000 Hours
Standards	ETL, cETL, Damp Location Listed, Title 24 JA8: 2019 Compliant, Energy Star 2.0
Input	120 VAC, 120-277V, 50/60Hz
Dimming	ELV: 100-10%, TRIAC: 100-5%
Mounting	Can be mounted on ceiling or wall in all orientations
Color Temp	3000K, 2700K, 3500K
CRI	90
Construction	Aluminum body with acrylic diffuser
Driver Dimension	2.0" x 1.4" x 1.0"

REPLACEMENT PARTS

HDW-LX20-MA - Hardware Pack

Model & Size	Color Temp & CRI	Finish	Watt	Voltage	LED Lumens	Delivered Lumens
FM-4215 15"	2700K 90	BK Black	27.5W	120-277V	3084	2114
	3500K 90	BN Brushed Nickel	26.2W	120 VAC		2278
	3000K 90	WT White				2221

Example: **FM-4215-WT**

For custom requests please contact customs@modernforms.com




Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Argo

FM-4219

PRODUCT DESCRIPTION

A simple and perfect form. Round out your lighting design with this luminaire that flush mounts directly to your ceiling or wall for a clean look and super illumination, thanks to advanced technology featuring efficient LED lighting. A curvaceous silhouette that will brighten your social circle.

FEATURES


- Driver concealed within the fixture
- 1" profile, edge-lit illumination
- The integrated driver is inside of fixture

SPECIFICATIONS

Rated Life	60000 Hours
Standards	ETL, cETL, Damp Location Listed, Title 24 JA8: 2019 Compliant, Energy Star 2.0
Input	120-277V, 50/60Hz
Dimming	ELV: 100-10%, TRIAC: 100-5%
Mounting	Can be mounted on ceiling or wall in all orientations
Color Temp	3500K, 3000K, 2700K
CRI	90
Construction	Aluminum body with acrylic diffuser
Driver Dimension	2.0" x 1.4" x 1.0"

REPLACEMENT PARTS

HDW-LX20-MA - Hardware Pack

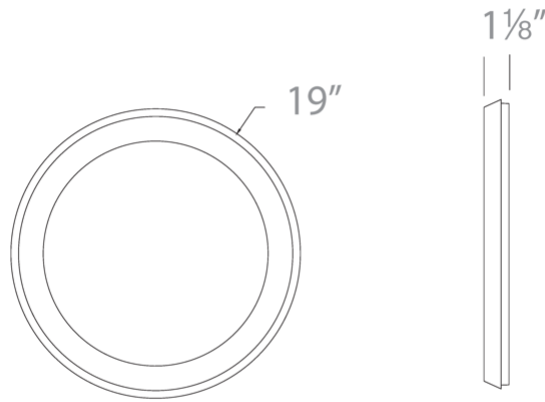

FM-4219

Model & Size	Color Temp & CRI	Finish	Watt	Voltage	LED Lumens	Delivered Lumens
FM-4219 19"	2700K 90	BK Black	32.7W	120-277V	3985	2214
	3500K 90	BN Brushed Nickel	31W			2389
	3000K 90	WT White				2870

Example: **FM-4219-WT**

For custom requests please contact customs@modernforms.com