

ADJUSTABLE WALL WASH – 5028W

W Track System Luminaires

WAC LIGHTING




Fixture Type:

Catalog Number:

Project: _____

Location: _____

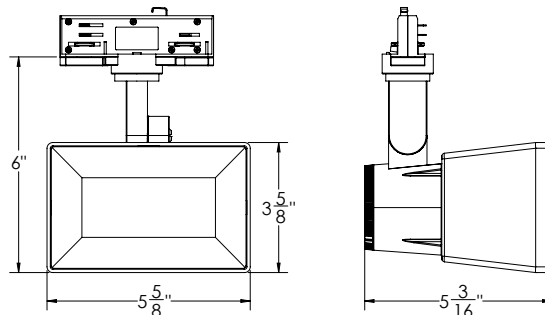

PRODUCT DESCRIPTION

With the ability to achieve beam distributions of 3x4 to 5x6 (46° by 70° to 100° by 120° NEMA distribution) proportions and more, expect a uniform beam wash of light in a fixture that can adapt to changing needs. A powerhouse all-in-one unit in 120V for WTK Track and 277V for WHK track provides the ability of rotating fixture head for vertical distribution and the ability to be dimmed, while being compatible with a range of lens and anti-glare accessories.

FEATURES

- Continuously adjustable beam angles from 46° by 70° to 100° by 120° (NEMA 3x4 to NEMA 5x6)
- Rotate fixture head for vertical distribution
- 365° horizontal aiming and 90° vertical aiming
- Accommodates one lens and one glare control accessory
- Solid corrosion resistant aluminum alloy
- Patents Pending
- 50,000 hour rated life
- 5-year WAC Lighting product warranty

SPECIFICATIONS

- Construction:** Die-cast aluminum body with regressed driver.
- Input:** 120 VAC, 277VAC 50/60Hz
- Power:** 28W
- Light Source:** High output LED
- Dimming:** 100%-5% Electronic Low Voltage (ELV)
- Standards:** ETL & cETL Dry Location Listed
- Finish:** Electrostatically powder coated White, Black, Platinum

Model	Lumens	CBCP	Color Temp	CRI	Finish
WTK 120V WHK 277V 5028W	1925	745	927 2700K 90 930 3000K 90 935 3500K 90 940 4000K 90	90	BK Black PT Platinum WT White
	2000	775			
	2025	785			
	2070	800			

WTK-5028W-_____-_____-

Example: WTK-5028W-927-PT

GLARE CONTROL ACCESSORIES

	5028-SHR-BK 5028-SHR-WT 5028-SHR-PT
	5028-HSHR-BK 5028-HSHR-WT 5028-HSHR-PT
	5028-VSHR-BK 5028-VSHR-WT 5028-VSHR-PT

LENS ACCESSORIES

Amber	4LENS-3X5-AMB	Frosted Spread Beam Elongating	4LENS-3X5-FR 4LENS-3X5-SPR 4LENS-3X5-BEL
Blue	4LENS-3X5-BLU		
Green	4LENS-3X5-GRN		
Red	4LENS-3X5-RED		


waclighting.com
 Phone (800) 526.2588
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122

Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760

WAC LIGHTING

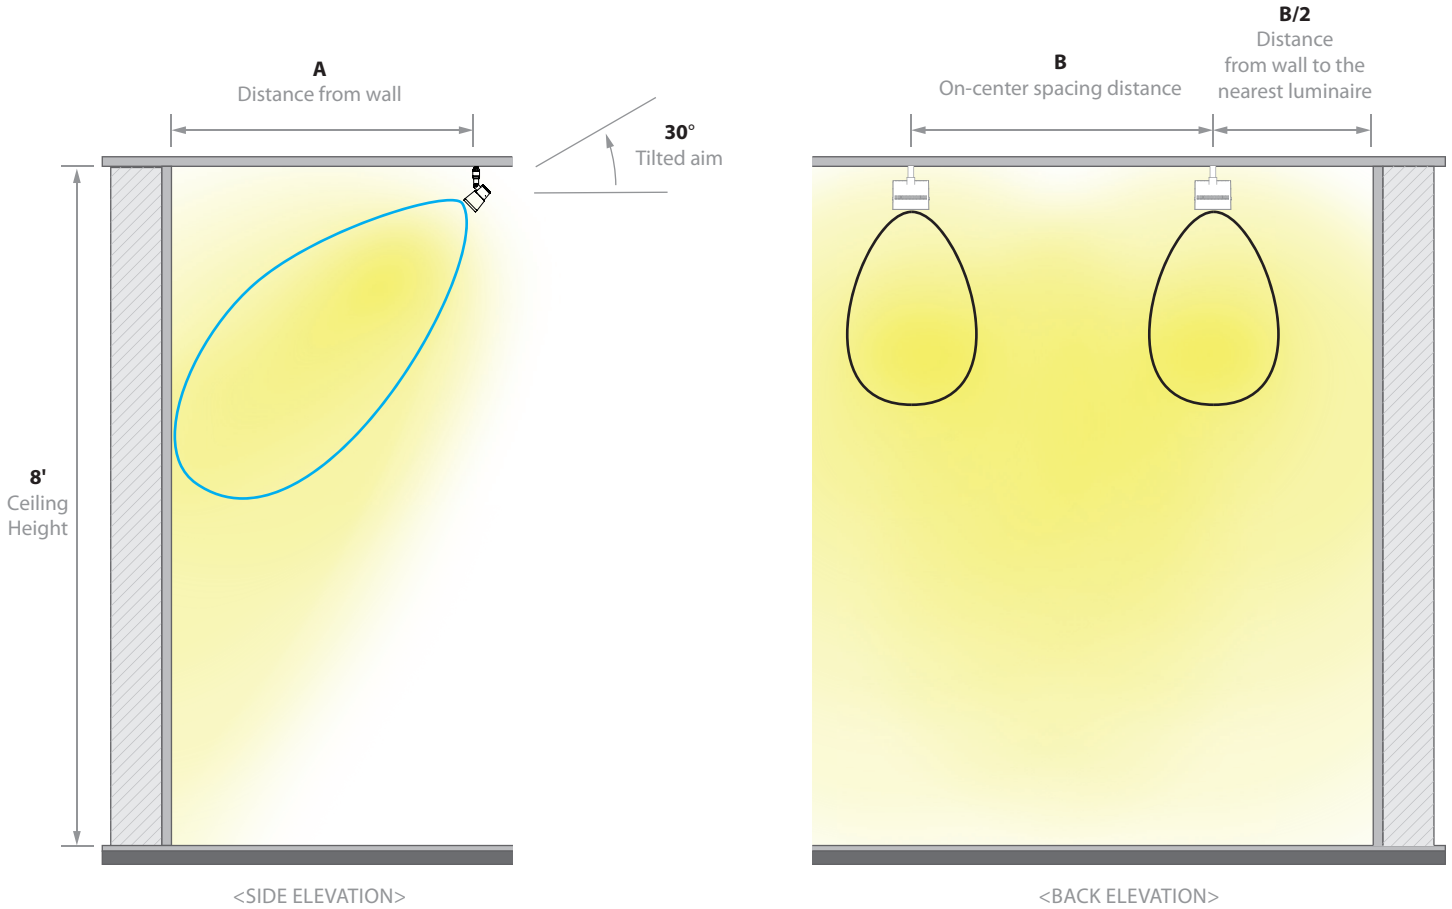


AVERAGE WALL ILLUMINANCE

Horizontal	A Distance from wall	B On-center spacing distance	
		3 feet	5 feet
3X4	3 feet	16	10
	5 feet	12	7.6
4X5	3 feet	30	19
	5 feet	23	15
5X6	3 feet	41	26
	5 feet	32	21

Vertical	A Distance from wall	B On-center spacing distance	
		3 feet	5 feet
3X4	3 feet	16	9.83
	5 feet	12	7.47
4X5	3 feet	28	18
	5 feet	22	14
5X6	3 feet	38	24
	5 feet	30	19

PHOTOMETRY

Shown when fixture is aimed towards the ground (nadir)



Results may vary depending on surface properties, ambient light levels, etc.

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760