

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Illusion

Pendant 3000K

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens	Title 24
PD-31727 27"	3000K 90	BK Black	54W	5253	3930	Yes
	3000K 90	TT Titanium	54W	5253	3930	Yes

Example: **PD-31727-BK**

DESCRIPTION

A spectacular halo of direct and indirect light from an incredibly ultra thin 1/2" edge-lit form factor. Three sleek low-profile suspension cables provide power without the need for an additional power cord suspended from the canopy, lending to a simple and minimalistic design for any modern or contemporary home or business. Illusion is adjustable to lengths of 100" through a push-pin locking mechanism at the canopy.

FEATURES


- Ultra thin 1/2" thick edge-lit disc
- Edge-lit panel illuminates up & down
- Can be mounted on a sloped ceiling
- Driver concealed within the canopy
- 5 year warranty

SPECIFICATIONS


Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%, 0-10V: 100 - 10%, TRIAC: 100 - 10%
Rated Life:	44000 Hours
Mounting:	Heavy gauge retention clips support trim firmly. Safety cabling standard.
Standards:	ETL, cETL, Title 24 JA8-2016 Compliant Damp Location Listed
Construction:	Aluminum hardware with etched acrylic diffuser



FINISHES



LINE DRAWING

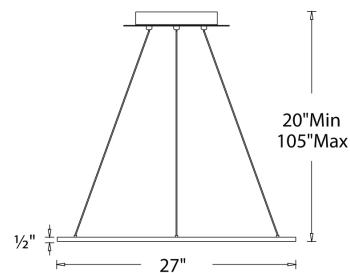

PD-31727

