
InvisiLED® Pro 3

24V High Output Foldable LED Tape Light

WAC LIGHTING

Responsible Lighting®

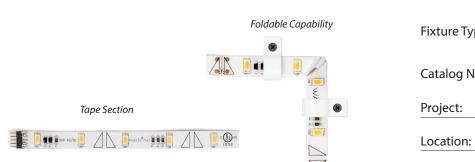

| Fixture Type: | |
|----------------|---|
| Catalog Number | : |
| Project: | |
| Location: | |

PRODUCT DESCRIPTION

Professional grade white tape light that delivers optimal color consistency and brightness. An ideal system for task or accent lighting applications.

FEATURES

- Can be field cut, male to male adapter required to re-use female side
- · Foldable design for lateral pattern creation
- Install LED-T-CL1 clips with folds
- Ultra thin profile at 1/8". 90° fold height of 3/8"
- · Diodes spaced evenly at 1" on center
- · Minimum run length of 1'
- · May be field cut every 6" at the end of a run
- · Three mounting methods provided for different surfaces
- 70,000 hour rated life
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Flexible, silicone cased tape light, Peel and stick 3M construction adhesive on back, Indicating marks for field cutting

Power Supply: Remote and plug-in electronic Class 2 transformers, 120VAC/120-277VAC, 50/60Hz input, 24V 60W and 96W output

Light Source: 12 LEDs per foot, Runs on 24V at 5W per foot


Dimming: May be dimmed with electronic low voltage 0-10V(ELV) dimmer

Operating Temperature: $-4^{\circ}F - 104^{\circ}F$ ($-20^{\circ}C - 40^{\circ}C$), relative humidity 95%


Standards: UL & cUL Listed for Damp Locations

ORDER NUMBER - TAPE SECTIONS

| Model # | Watts/ft | Color Temp | CRI Lumens/ft | Length | Qty | Tape Color |
|----------|----------|------------------------------------|--------------------------------------|--|-------------------|-----------------|
| LED-TE24 | 5 | 30 3000K 35 3500K | 95 385 95 395 90 440 90 475 | 6IN 6 inches 1 1 foot 5 5 feet 1-40 1 foot | 1 1 1 40 | WT White |







Class 2 Power Supply (Required)

| Туре | | Model | Input | Output | Max Run | Dim | |
|-------------|--|-----------------------------------|------------------|------------------------|--------------------|------------|-----------------------------|
| Remote | THE RESERVE OF THE PARTY OF THE | EN-2460-RB2-T EN-24100-RB2-T | 120VAC 120VAC | 24VAC/60W 24VAC/96W | 12 feet 20 feet | ELV ELV | Includes a 6 foot lead wire |
| Plug-in | | EN-2460-P-AR-T EN-24100-P-AR-T | 120VAC 120VAC | 24VAC/60W 24VAC/96W | 12 feet 20 feet | ELV ELV | Includes a 6 foot lead wire |
| Remote 277V | | EN-24100-277-RB2-T | 120-277VAC | 24VDC/96W | 20 feet | 0-10V | Includes a 6 foot lead wire |

waclighting.com Phone (800) 526.2588 Fax (800) 526.2585 Headquarters/Eastern Distribution Center 44 Harbor Park Drive Port Washington, NY 11050 Central Distribution Center 1600 Distribution Ct Lithia Springs, GA 30122 Western Distribution Center 1750 Archibald Avenue Ontario, CA 91760

InvisiLED® Pro 3

WAC LIGHTING

Responsible Lighting®

24V High Output Foldable LED Tape Light

Indoor Controller

Touch Panel and Motion Sensor



Includes a Touch Panel, an Occupancy Sensor, and a Controller CT-6A-R2 AC/DC input at 12V(60W Max) or 24V(96W Max) Connect on secondary side of driver/transformer

Pro, Pro2, Pro3, LITE, Classic Palette

Indoor Electrical Accessories

| | In Wall Rated Extension Cable | LED-TC-WEXT-144 LED-TC-WEXT-144-WT | Black White | 12 ft 12 ft |
|-----------------|--|---------------------------------------|----------------|------------------------|
| | | LED-TC-WEXT-144-W1 | Black | 12 IL 20 ft |
| Mill 1 | Extends distance between a hard wired power supply | LED-TC-WEXT-240 | White | 201t 20 ft |
| \(\frac{1}{2}\) | or a wiring box to a tape section. | LED-TC-WEXT-240-WT | vviiite | 2011 |
| all als | In Wall Rated Joiner Cable | LED-TC-WIC-144 | Black | 12 ft |
| | iii wali Nated Joiner Cable | LED-TC-WIC-144-WT | White | 12 ft |
| | Connects tape sections. 2 female ends. | LED-TC-WIC-240 | Black | 20 ft |
| ** | 1 male to male connector included | LED-TC-WIC-240-WT | White | 20 ft |
| | | LED-TC-P-2 | Black | 2 ft |
| Will. | Lead Wire | LED-TC-P-2-WT | White | 2 ft |
| | | LED-TC-P-12 | Black | 12 ft |
| | Alternative lengths for plug-in power supplies | LED-TC-P-12-WT | White | 12 ft |
| -3/1 | Extension Cable | LED TO EVT 444 | D1 1 | |
| | Extends distance between a hard wired power supply | LED-TC-EXT-144 LED-TC-EXT-144-WT | Black | 12 ft |
| | or a wiring box to a tape section | LED-IC-EXI-144-WI | White | |
| | Low Voltage Wiring Box With Feed | | | L: 1½ in |
| | Neatly houses connectos for up to | LED-TC-B-2 | Black | W: 3/4 in |
| | two wires with 12" female feed | LED-TC-B-2-WT | White | H: 7/8 in |
| | Low Voltage Wiring Box | | | L: 1½ in |
| 0 8 0 | ···· ····g - ·······g·· | LED-T-B | | W: 3/4 in |
| | Neatly houses connections for up to two wires | | | H: 7/8 in |
| | Wiring Box With Switch | | | L: 6¼ in |
| (A) (A) | | TB-S | | L: 674 IN W:15/8 in |
| | Use when spanning a large gap in a system layout without leaving | 10-3 | | W:198 III H: 1¼ in |
| | exposed wiring. Optional switch included | | | 177 1 74 111 |

Compatible with Pro, Pro2, Pro3, LITE, Classic

| | | LED-TC-IC2 | Black | 2 in |
|----|------------------------|----------------|-------|--------|
| | | LED-TC-IC2-WT | White | 2 in |
| | | LED-TC-IC6 | Black | 6 in |
| | | LED-TC-IC6-WT | White | 6in |
| | Joiner Cable | LED-TC-IC12 | Black | 12 in |
| 13 | 75e. cab.e | LED-TC-IC12-WT | White | 12 in |
| | | LED-TC-IC36 | Black | 36 in |
| | Connects tape sections | LED-TC-IC36-WT | White | 36 in |
| | | LED-TC-IC72 | Black | 72 in |
| | | LED-TC-IC72-WT | White | 72 in |
| | Male to male connector | LED-TC-MM | Black | 50 Qty |

Compatible with Pro, Pro2, Pro3, LITE, Classic, Palette. Change directionality of tape runs and reuse cut ends of tape.

| | 3-Way "Y" Connector | LED-TC-Y LED-TC-Y-WT | Black White | |
|----------|--------------------------|-------------------------|----------------|--|
| - | Connects tape sections | | | |
| Y | 4-Way "X" Connector | LED-TC-X | Black | |
| | Connects tape sections | LED-TC-X-WT | White | |
| | "L" Connector | LED-TC-L | Black | |
| | Connects tape sections | LED-TC-L-WT | White | |
| | End cap | LED-TC-EC | Black | |
| | 1 cut and 1 male end cap | LED-TC-EC-WT | White | |

Compatible with Pro, Pro2, Pro3, LITE, Classic, Palette

InvisiLED® Pro 3


Indoor Aluminum Channels

WAC LIGHTING

Responsible Lighting®

LED-T-CH1-EC

2 pcs



Diffuses light from InvisiLED tape Includes a diffuser, two end caps, and five screws Compatible with Pro, Pro2, Pro3, LITE, Classic, Palette



Eliminates visible hot spots Includes a diffuser, two end caps, and five screws Compatible with Pro, Pro2, Pro3, LITE, Classic, Palette

Additional End Cap



Includes a diffuser, two end caps, and ten screws Compatible with Pro, Pro2, Pro3, LITE, Classic, Palette



Includes 2 pieces, 4 screws. Use to mount Aluminum Channel, Deep Aluminum Channel, 45° Angled Aluminum Channel

INDOOR MOUNTING ACCESSORIES



Aluminum Retrofit Channel

LED-T-RC 3 feet

Clear Channel

LED-TO24-CH5

5 feet

Can be bent to create fixed curves or used as a glare shield Compatible with Pro, Pro2, Pro3, LITE, Classic, Palette Includes a diffuser, two end caps, and five screws Provides a clean mounting surface for 3M adhesive



Clip For surfaces that are difficult to adhere

LED-T-CL

10 pcs 10 Screws

Curve Clip Secures on one edge

LED-T-CL1

10 pcs 10 Screws

Clips to hold indoor InvisiLED tapes sections Compatible with Pro, Pro2, Pro3, LITE, Classic, Palette