


Boulevard

The Boulevard series, an architectural recessed lighting channel that can be installed in a wide range of commercial and residential environments. Add depth to ceiling planes with a visible separation, or seamlessly daisy-chained to create dramatic effects.

NEW  DRY  AIR TIGHT  ENERGY STAR  ETL Intertek  IC RATED  JA8 CERTIFIED

2700k 3000k 3500k 4000k 5000k
COLOR TEMPERATURE

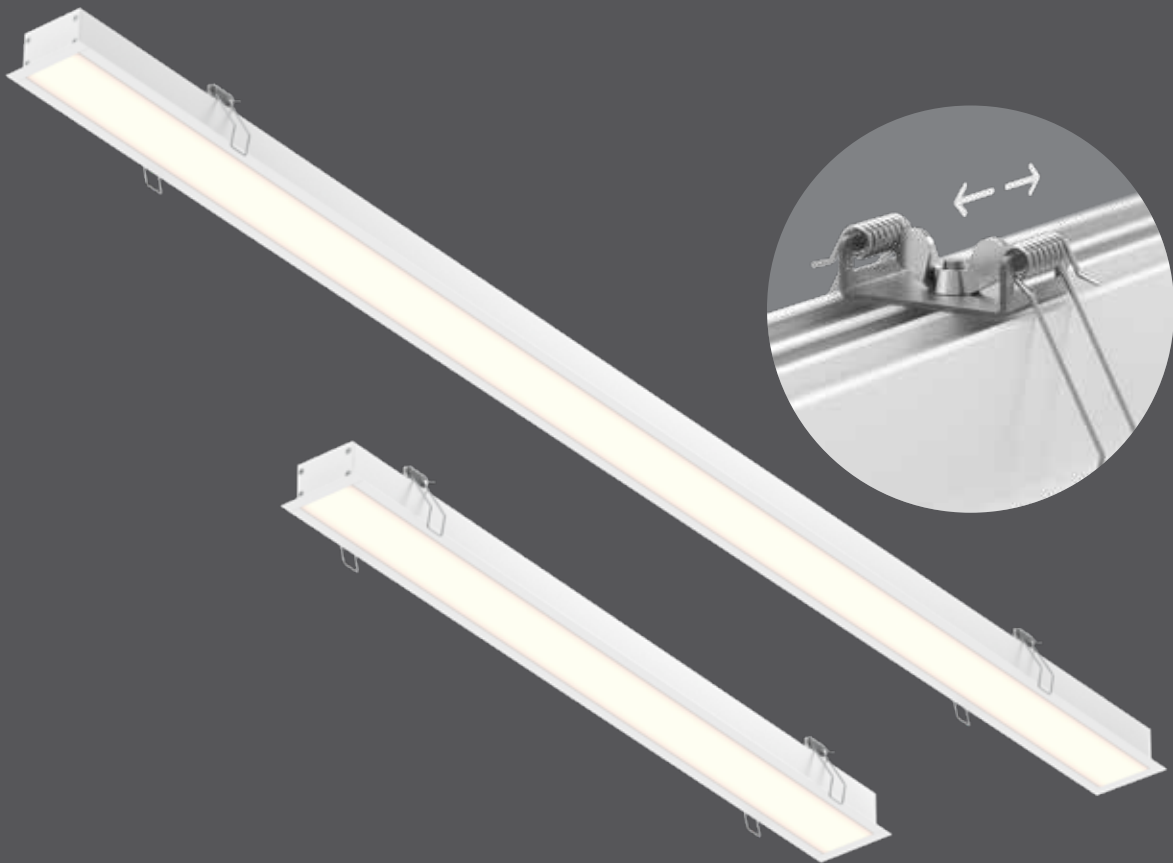

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LNR24-CC	24"	20 W	1725 lm	90	2700, 3000, 3500,	120 V
LNR24-CC-V*	24"	20 W	1725 lm		4000, 5000 K	120, 277, 347 V
LNR48-CC	48"	40 W	3760 lm			120 V
LNR48-CC-V*	48"	40 W	3760 lm			120, 277, 347 V

* 0-10V dimming

Specifications

Every fixture includes a junction box with integrated dimmable driver
 Can be daisy chained
 Superior LED performance and lifespan
 Minimal heat emission
 Aluminum construction
 Switch-selectable CCT: 2700K/3000 K/3500 K/4000 K/5000 K
 108° beam spread
 IC certification (suitable for direct contact with insulation)
 Air-tight certified as per ASTM E283-04
 Suitable for dry locations
 Refer to website for dimmer compatibility
 Ideal operating temperature: -20° to 40° C
 5-year warranty

Finish

○ **WH** White

Accessories

LNACC-L16FT
 16-foot lens for Boulevard series pendants and recessed linears

RFP-LNR24

Rough-in plate



RFP-LNR48


Rough-in plate

Note

Other color °T, finishes, and voltage options are available but may require MOQ's and longer lead times. Please contact your DALI representative for more information.

LNR24-CC 23-3/8" x 2-1/8" 
LNR24-CC-V

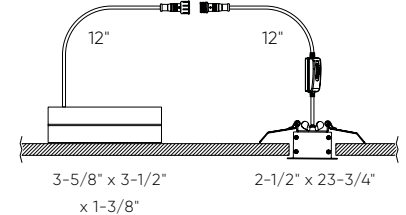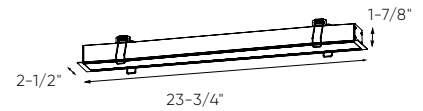

LNR48-CC 47-7/16" x 2-1/8" 
LNR48-CC-V

