




BLM 262 30 • MAURY

ENVISAGE
FLUORESCENT BACK-LIT MIRRORS

Type	
Project	
Catalog No.	

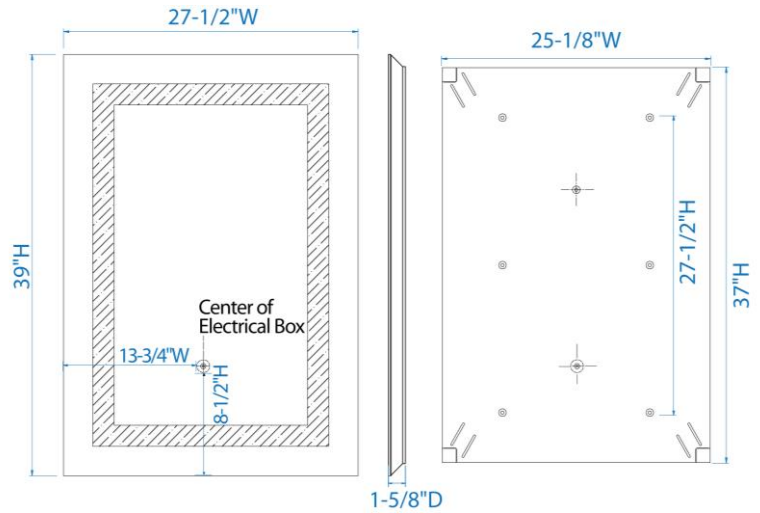

DESCRIPTION

Rectangular Fluorescent Back Lit Mirror With Two Vertical Cutouts. ADA Compliant.

- Finish:** Mirror surface with white metal sub-assembly
- Diffuser:** Frosted Glass
- Lamp:** (2) T5, 14W / (2) T5, 21W 3000K (Included)
- Total Wattage:** 70W
- Dimensions:** 39"H x 27-1/2"W x 1-5/8"D
- Weight:** 51 Pounds (23 Kgs)
- Construction:** Steel, Glass and Aluminum. IP20 Rated.

MOUNTING:
Mounts over a standard J-box. Screws directly to drywall.

WIRING:
Connections accomplished in existing J-Box.

BALLAST SPECIFICATIONS

Model: **Fulham NPY-120-214-LT5**

- Input Voltage: 120V AC 50/60Hz
- Maximum case temperature: 167°F (75°C)
- Starting type: Rapid start
- Minimum starting temperature: 14°F (-10°C)
- Minimum operating temperature: 32°F (0°C)
- Transient protection: C42.41 Class A 7 strikes
- Sound rating: "A"
- End of life (EOL) Protection
- Power Factor: >.5
- Energy Star: Yes
- Safety Listing: UL/CUL Class "P"
- EMI: FCC Part 18-B

Model: **Fulham NPY-120-221-LT5**

- Input Voltage: 120V AC 50/60Hz
- Maximum case temperature: 167°F (75°C)
- Starting type: Rapid start
- Minimum starting temperature: 14°F (-10°C)
- Minimum operating temperature: 32°F (0°C)
- Transient protection: C42.41 Class A 7 strikes
- Sound rating: "A"
- End of Life (EOL) Protection
- Power Factor: >.5
- Energy Star: Yes
- Safety Listing: UL/CUL Class "P"
- EMI: FCC Part 18-B