



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

LED Wraparound LWL Series

Features

This low profile, clean appearance, surface mounted wrap provides a wide distribution of light with a frosted clear diffuser. It can be used in various applications including offices, corridors, garages, kitchens and public spaces. Fixture mounts to standard junction box (not included).

2in1 color temperature
3000K/4000K



Construction

Housing is die-formed of 22-gauge steel. Standard mounting holes are included. Knock-out in end cap for continuous mounting applications. Power supply connections can be made inside the fixture wire way or in a junction box (not included).



Finish

Housing is finished in lighting grade white baked gloss enamel paint.

Diffuser

Frosted clear diffuser is made of LED acrylic material.

Electrical

D1 Version


Direct wired with a constant current low voltage electronic LED driver rated at 120 VAC. The driver is dimmable with a 2-wire (Triac) or electronic low voltage (ELV) dimmer switch.

D2 Version

Direct wired with a constant current low voltage electronic LED driver rated for 120-277 VAC. LED driver is dimmable 0-10V DC.

LED

Integrated LED modules capable of producing:
30W, 2500 source lumens
36W, 3000 source lumens
60W, 5000 source lumens
Adjustable color temperature (CCT), 3000K or 4000K
Rated for 50,000 hours, 90 CRI.

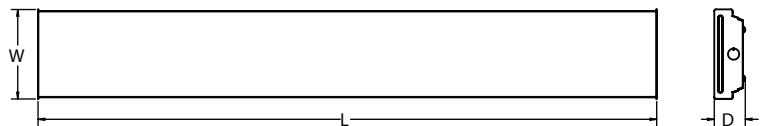

Certification

cETLus listed for damp locations.
ENERGY STAR® Qualified
Title 24/JA8 Compliant

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.

Specifications and dimensions subject to change without notice.

Ordering Information:

White	LED	Source Lumens	Delivered Lumens	Adjustable CCT	L	W	H
LWLO7242500LAJD1	30W	2500	2114	3000K/4000K	24"	7"	2-3/8"
LWLO7483000LAJD1	36W	3000	2737	3000K/4000K	48"	7"	2-3/8"
LWLO7485000LAJD1	60W	5000	4203	3000K/4000K	48"	7"	2-3/8"
LWLO7242500LAJD2	30W	2500	2114	3000K/4000K	24"	7"	2-3/8"
LWLO7483000LAJD2	36W	3000	2737	3000K/4000K	48"	7"	2-3/8"
LWLO7485000LAJD2	60W	5000	4203	3000K/4000K	48"	7"	2-3/8"