



| | | |
|----------------|--|--------------|
| LOCATION | | DATE |
| PREPARED BY | | QUANTITY |
| COMMENTS | | FIXTURE TYPE |
| CATALOG NUMBER | | |

Soho LED Pendant SSP Series

Features

Frosted glass cylinder pendant is suspended with an 9 foot adjustable coax cable can be ordered individual or with a multi-point canopy.
Canopy mounts to a standard junction box (not included).

Construction

The glass cylinder is 14" tall and 3-7/8" in diameter and held into place by three decorative studs. The canopy fits over a standard junction box.
Power supply connections must be made inside a junction box (not included).

Finish

The canopy is plated in Satin Nickel.

Diffuser

Glass cylinder pendant is .40" thick. Glass colors include white (WH) and cream (CR).

Electrical

D1 Driver

Direct wired with a constant current low voltage electronic LED driver rated at 120 VAC. The driver is dimmable with a 2-wire (Triac) or electronic low voltage (ELV) dimmer switch.

D2 Driver

Direct wired with a constant current low voltage electronic LED driver rated for 120-277 VAC. LED driver is dimmable 0-10V DC.


Lamping

All pendants include a 10W LED module. Light engine produces 1000 source lumens. 3000K and 4000K (CCT). 50,000 hr. LED life, 90 CRI.

Certification

All fixtures are ETL listed for damp locations.

Specifications and dimensions
subject to change without notice.

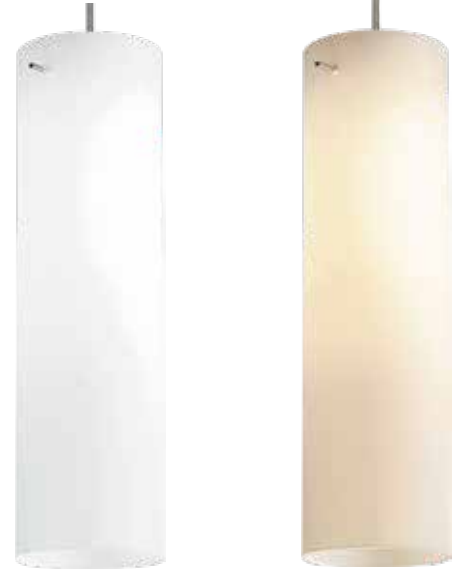

White

Cream



Ordering Information:

| Series | Source Lumens | LED | CCT | Driver | Finish | Glass | Canopy Options |
|--------|---------------|-----|----------------------|--|-----------------|----------------------|--|
| SSP | 1000 | L | 30 3000K 40 4000K | D1 Voltage (120V TRIAC Dimming) D2 Voltage (120-277V 0-10V Dimming) | SN Satin Nickel | CR Cream WH White | Blank Monopoint LNR3 (3) Light Linear RND3 (3) Light Round RND6 (6) Light Round |

Example: SSP1000L30WHSND1