





WS825 • BRIGHTON

ADA LED Wall Fixture
Line Voltage LED Fixture

Type	
Project	
Catalog No.	

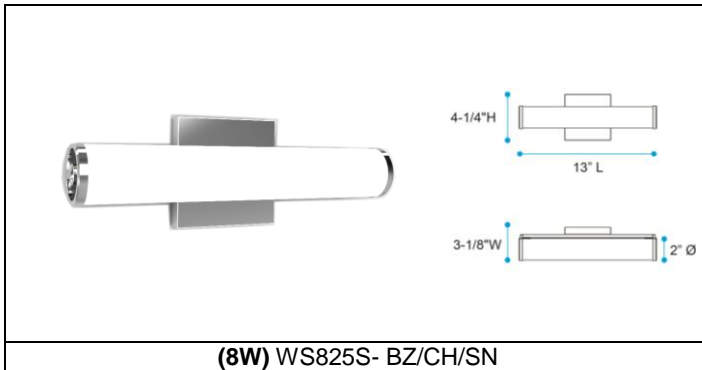

(8W) WS825S- BZ/CH/SN

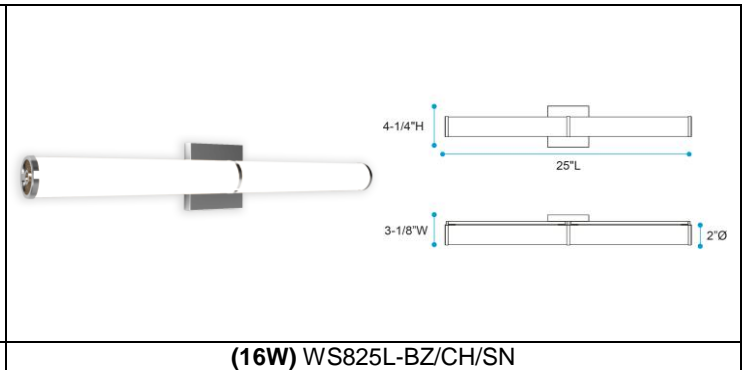

(16W) WS825L-BZ/CH/SN

DESCRIPTION

Brighton is a simple and sleek style wall fixture with the versatility to be used in any setting and can be mounted horizontally or vertically. This design embraces the simplicity of tubular form with minimal exposed hardware. It has refined cast zinc parts polished to a mirror finish supporting a built-in heat sink inside the glass shade ensuring a long life span to its state of the art JESCO AC LED.

FEATURES

- Unique JESCO AC LEDs eliminates need for driver
- Long life – Over 16 years if used 8 hours per day
- Dimmable using standard incandescent dimmer
- Instant on – no warm up required
- Emitted light produces no heat, and emits no IR or UV
- Eco Friendly – No mercury or hazardous material
- Simple installation
- ADA compliant for wall applications in multiple sizes

SPECIFICATIONS

Description	LED Wall Fixture			
Input Voltage	120 VAC			
Dimming	Incandescent/ Triac & ELV			
Model / Wattage	WS825S (8W)		WS825L (16W)	
CCT	2700K	3000K	2700K	3000K
LED Lumens	1016.70	955.29	2033.40	1910.57
LED Efficacy	128	119.4	128	119.4
Delivered Lumens	645.81	606.8	1291.6	1213.6
Delivered Efficacy	81.4	78.8	81.4	78.8
CRI	90 CRI			
Lamp Life	50,000 hours			
Dimensions	CW 825S-BZ,CH,SN (3-1/8"W x 13"L x 4/1/4"H) CW 825L-BZ,CH,SN (3-1/8"W x 25"L x 4/1/4"H)			
Environment	Indoor, Damp			
Certifications	ETL			
Warranty	5 Years – see published warranty terms for detailed information.			

*LED

ORDERING INFORMATION

MODEL	FINISH	CCT / CRI
<input type="text"/>	<input type="text"/>	<input type="text"/>
WS820S	BZ (Bronze)	2790 : 2700K 90CRI
WS825L	CH (Chrome)	3090 : 3000K 90CRI
	SN (Satin Nickel)	



Example: WS825L-CH-3090



www.jescolighting.com
support@jescolighting.com
Tech Support: 855.592.0029

15 Harbor Park Drive
Port Washington, NY 11050
Main Line: 800.527.7796
Fax Line: 855.265.5768

219 South 6th Ave
City of Industry, CA 91746
Main Line: 855.654.0110
Fax Line: 626.333.2955

12/29/2016

Specifications subject to change without notice.

Page 1 of 1