

GRATIS Pendant

120v : **3-609-xxx**

277v : **37-609-xxx**

oxygen

FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____



-2018 Clear-Coffee Ombre Glass / Gun Metal


-14 Clear-Clear Glass / Polished Chrome

-124 Clear-Satin Opal Glass / Satin Nickel

-1314 Clear-Smoked Ombre Glass / Polished Chrome

-1414 Clear-Mirrored Glass / Polished Chrome

- LIGHT SOURCE** 1 x 5.12W LED, 3000K, CRI 90
- LUMINAIRE POWER** 6.50W at 120V
- RATED LIFE** 60000 hr RL
- OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K
- LUMEN OUTPUT** Delivered: 391 lm (LM-79)
- INPUT VOLTAGE** 120V or 277V
- DRIVER OUTPUT** 150mA, 6W
- DIMMING** 0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
- CONSTRUCTION** Plated Steel and Glass
- DIFFUSER/METAL FINISHES**
 - (-14) Clear-Clear Glass / Polished Chrome
 - (-124) Clear-Satin Opal Glass / Satin Nickel
 - (-1314) Clear-Smoked Ombre Glass / Polished Chrome
 - (-1414) Clear-Mirrored Glass / Polished Chrome
 - (-2018) Clear-Coffee Ombre Glass / Gunmetal
- MOUNTING** 4" Octagonal J-Box, 2" x 3" J-Box
- STANDARDS** ETL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

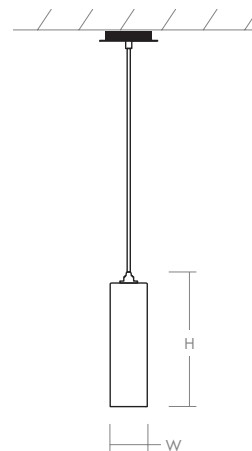

DIMENSIONS
Dia. Canopy: 5.88"
Dia. Fixture: 3.75"
H. Fixture: 13.64"
Supplied with 8 ft braided cord

Order example for standard fixture:

3-609-1414 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v, **37:** 277v

Order example for optional color temperatures: **3-609-271414**

27: 2700K, **35:** 3500K, **40:** 4000K

