

DUO Wall Sconce

120v : **3-509-xx**

oxygen

FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____



-25 Satin Copper



-14 Polished Chrome



-18 Gunmetal



-24 Satin Nickel



-40 Aged Brass



With optional backplate

LIGHT SOURCE 2 x 7W Max LED GU10 Base Socket (Lamp not included)

LUMINAIRE POWER 14.4W at 120V

RATED LIFE See LED bulb manufacturer specification

LUMEN OUTPUT Delivered: 761 lm (LM-79)

INPUT VOLTAGE 120V

DRIVER OUTPUT No


CONSTRUCTION Plated Steel and Glass

DIFFUSER - Frosted Glass

FINISHES Polished Chrome (-14), Gunmetal (-18), Satin Nickel (-24), Satin Copper (-25), Aged Brass (-40)

MOUNTING 4" Octagonal J-Box with optional backplate, 2"x 3" J-Box

STANDARDS ETL Dry/Damp listed, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

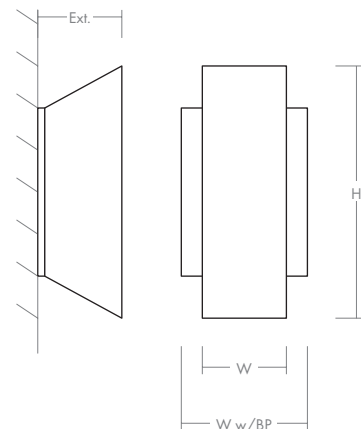

DIMENSIONS

W: 3.00"

H: 9.25"

Ext: 3.00"

M.C: 4.58" From top of fixture

With backplate

W: 4.75"

H: 9.25"

Ext: 3.12"

M.C: 4.58" From top of fixture

Order example for standard fixture:

3-509-24 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v

