

ELIF Outdoor

120v : **3-737-xx**

277v : **37-737-xx**

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____





-22 Oiled Bronze



-16 Gray

- LIGHT SOURCE** 2 x 10.1W LED, 3000K, CRI 90
- LUMINAIRE POWER** 25.7W at 120V
- RATED LIFE** 60000 hr RL
- OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K
- LUMEN OUTPUT** Delivered: 695 lm (LM-79)
- INPUT VOLTAGE** 120V or 277V
- DRIVER OUTPUT** 2 x 350 mA, 12W
- DIMMING** 0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
- CONSTRUCTION** Cast Aluminium and Polycarbonate
- DIFFUSER** - Polished White Polycarbonate
- FINISHES** Gray (-16), Oiled Bronze (-22)
- MOUNTING** 4" Octagonal J-Box, 2"x3" J-Box*
* Must be mounted horizontally
(Installer must provide a bead of caulk between fixture housing and mounting surface)
- STANDARDS** ETL Wet, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

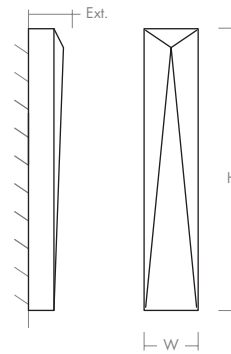

DIMENSIONS

- W:** 4.25"
- H:** 22.00"
- Ext:** 2.75"
- M.C:** 11.00" From top of fixture

Order example for standard fixture:

3-737-22 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v, 37: 277v

Order example for optional color temperatures: **3-737-2722**

27: 2700K, 35: 3500K, 40: 4000K

