



# BILLOW 15

SCONCES OUTDOOR

ADA  
COMPLIANT  
location:  
**WET**

## SPECIFICATIONS:

### DESCRIPTION

Wall-mounted **ADA-compliant** sconce.

### LAMPING

**Standard:** 2x 60W A15 120V incandescent, lamp not included. Dimmable with standard incandescent dimmer (not included).

**LED:** 9W Replaceable source, 120V, dimmable, 80+ CRI, 3000°K CCT, 800 lumens, 30,000 hours. Lamp included.

### DIFFUSER

Diffuser shall be glass with painted sides in various decors.

### CONSTRUCTION

Stamped aluminum fitter is powder coated. Glass is secured by stainless steel set screws.

### MOUNTING


Installs directly to a 4" octagonal outlet box. 75°C supply wire required for incandescent lamping. Fixture is centered on the outlet box. Wall mount only.

### LABELS

UL or ETL Listed. Suitable for Wet Locations (interior or exterior use).



SHOWN IN OPAL MATTE/SILVER AND OPAL MATTE/BRONZE

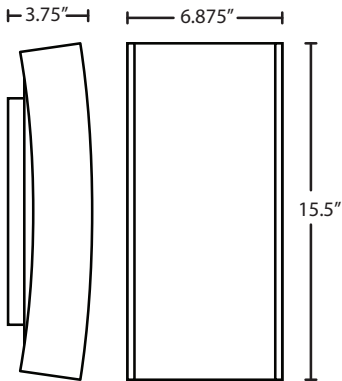

OPAL MATTE/BLACK

## ORDERING:

FIXTURE	LAMP OPTIONS	FINISH
BILLOW15 Opal Matte	(blank) 2x 60 A19 Incan LED 2x 9W LED	BK Black BR Bronze SL Silver

**Ex. BILLOW15-BK**  
Billow 15 Outdoor Sconce,  
Black

**Project Information:**



All dimensions provided are nominal.  
Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 3/18