
SILO - model: PD-2015

Monopoint Pendant



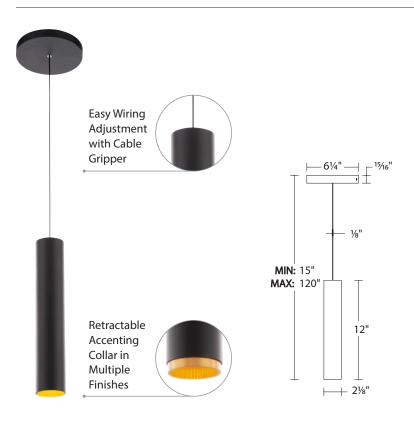

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

A sleek, rotatable design, affording continuous 15°-45° beam adjustment. Single and two-tone finishes in a monopoint or track pendant complement any space.

SPECIFICATIONS

Construction: Extruded aluminum with PC retractable accenting

collar

Power: 17.5W at 120VAC, 20W at 277VAC

Input: 120-277VAC, 50-60Hz

Dimming: Electronic Low Voltage (ELV), 0-10V: 100%-5%

Refer to dimming report for compatibility

Light Source: Integrated LED, 3-step Mac Adam Ellipse

Rated Life: 50,000 Hours at L70

Finish: Electrostatically powder coated Black or White body,

Black, Gold, or White retractable collar

Operating Temp:

-4°F to 104° F (-20° C to 40° C)

Standards: ETL & cETL Damp Location Listed,

Title 24 JA8-2019 Compliant


FEATURES

- Extruded aluminum construction
- Available as monopoint (PD) and for H/J/L track
- Retractable accenting collar can be rotated for continuous 15°-45° beam adjustment
- · Easy wiring adjustment with cable-gripper on fixture body
- · Canopy, wire, and fixture body all match in color
- Retractable accenting collar available in multiple finishes extends up to 3/8" to create a two-tone finish
- · Low profile canopy, compatible with pancake junction boxes
- Universal voltage driver concealed within canopy
- · 5 year warranty

ORDER NUMBER

Model	Beam	Lumens	СВСР	Color Temp		CRI	Finish	Body/Collar
PD-2015	15° 45°	415 755	3192 1371	927 930 935 940	2700K 3000K 3500K 4000K	90	BK/BK BK/GL BK/WT WT/BK WT/GL WT/WT	Black/Black Black/Gold Black/White White/Black White/Gold White/White

Continuously adjustable beam angles from 15° to 45°



PD-2015-930-Example: PD-2015-930-WT/BK

waclighting.com Phone (800) 526.2588 Fax (800) 526.2585 Headquarters/Eastern Distribution Center 44 Harbor Park Drive Port Washington, NY 11050 Central Distribution Center 1600 Distribution Ct Lithia Springs, GA 30122 Western Distribution Center 1750 Archibald Avenue Ontario, CA 91760