


Assembly Instructions for 447

We recommend installation of this fixture be done by a licensed electrician. Turn off power at the main fuse or circuit breaker box. DO NOT EXCEED RECOMMENDED WATTAGE!

**Actual parts may vary slightly depending upon the model

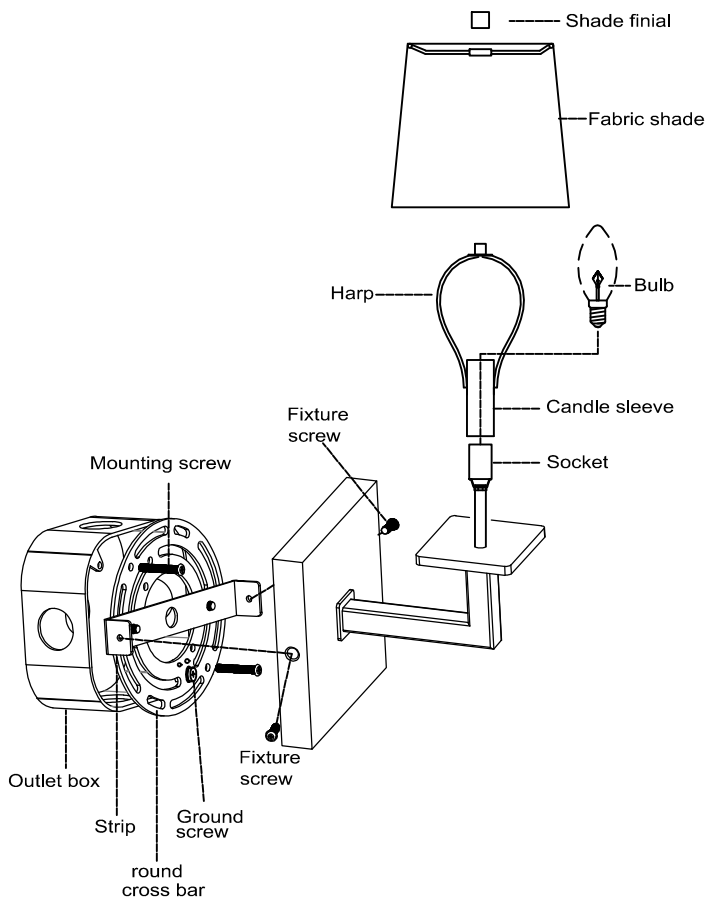

1. Remove the parts carefully from the box before discarding the carton
2. Remove harp / candle sleeve and insert it over the fixture socket. Unscrew shade finial from the top of harp.
3. Attach round cross bar with strip to the outlet box with ground screw facing out.
4. Fasten ground wire to green screw, Fasten lead wire (or white wire) with ridges to the white wire. Use wire nut to fasten it.
5. Fasten smooth (or black wire) lead wire to the black wire in the box & use nut to fasten it.
6. Place the fixture over the outlet box with holes on the backplate/canopy aligning with the strip.
7. Secure the fixture using fixture screws.
8. Install bulbs (not included).
9. Place the fabric shade on the top of harp nipple & lock the fabric shade by screwing shade finial on the threads of the harp.
10. Restore circuit breaker.

***Never touch the sconce/shade while power is on. To change bulb, allow 15 minutes for fixture to cool down.**