

METRIX Vanity

120v : **3-542-xx**

277v : **37-542-xx**

oxygen

FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____




-24 Satin Nickel



-20 Polished Nickel

LIGHT SOURCE	1 x 11.9W LED, 3000K, CRI 90
LUMINAIRE POWER	14.6W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 1083 lm (LM-79)
INPUT VOLTAGE	120V or 277V
DRIVER OUTPUT	350mA, 12W
DIMMING	0-10v &Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
CONSTRUCTION	Plated Steel and Acrylic
DIFFUSER	- Matte White Acrylic
FINISHES	Polished Nickel (-20), Satin Nickel (-24)
MOUNTING	4" Octagonal J-Box, 2"x 3" J-Box
STANDARDS	ETL Dry/Damp listed, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

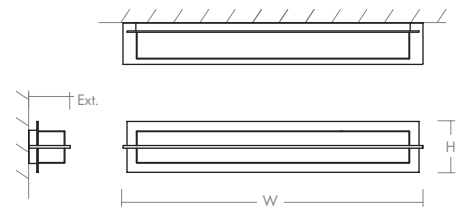

DIMENSIONS

W: 28.00"

H: 4.75"

Ext: 3.88"

M.C: 2.38" From top of fixture

Order example for standard fixture:

3-542-24 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v, 37: 277v

Order example for optional color temperatures: **3-542-2724**

27: 2700K, 35: 3500K, 40: 4000K

