

# IN41402 INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

### **CAUTION**

WARNING: Risk of Fire. Consult a qualified electrician to ensure correct branch circuit conductor. Min 90°C supply conductors.

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.


# **GENERAL**

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

## ASSEMBLY AND INSTALLATION

- 1. Thread two machine screws (6) to the mounting plate (7) and secure with the hex nut (9).
- 2. Secure the mounting plate (7) with mounting screw (10) to the outlet box (1).
- 3. Pull out the outlet wire and ground wire from the outlet box (1). Make wire connections.
- --Ribbed wire (w/o marking) from light to White wire (2) from power source.
- --Smooth wire (w/o marking) from light to Black wire (4) from power source.
- --Loop the ground wire (3) to mounting plate (7) with a ground screw (8).
- 4. Attach the back plate (11) against the outlet box (1), secure with the ball nut (12).
- 5. Place the glass shade (14) over the socket (13) and secure with the socket ring (15)
- 6. Install bulbs: (bulbs not included)
- (Do not exceed the maximum capacity recommended on the sockets).

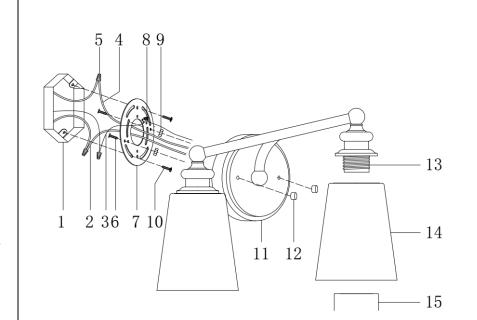

- 1. OUTLET BOX
- 2. WHITE WIRE
- 3. GROUND WIRE
- 4. BLACK WIRE
- 5. WIRE CONNECTOR
- 6. MACHINE SCREW
- 7. MOUNTING PLATE
- 8. GROUND SCREW

- 9. HEX NUT
- 10. MOUNTING SCREW
- 11. BACK PLATE
- 12. BALL NUT
- 13 SOCKET
- 14. GLASS SHADE
- 15. SOCKET RING

#### INSTALLATION IS NOW COMPLETE