



# PAHU 4

MINI SCONCES WALL

location:  
**DAMP**

## SPECIFICATIONS:

### DESCRIPTION

Wall-mounted sconce featuring one handcrafted glass.

### LAMPING

**Standard:** 40W Low-pressure G9 Halogen 120V lamp, included.  
Suitable for use in an open fixture. Dimmable with standard incandescent dimmer.

**LED:** 5W LED Replaceable source 120V, dimmable, included.

### DIFFUSER

Shade shall be handcrafted double glass of various decors.  
Outer diameter of 4.0" and height of 7.0"

### CONSTRUCTION

Fixture utilizes metal arm assembly with stamped steel canopy and faceplate (5" Circle or Square), with plated finish.

### METAL FINISH


Fixture shall be finished in Bronze, Chrome or Satin Nickel.

### MOUNTING

Installs directly to a 4" octagonal outlet box. Wall-mount only.  
Designed for uplighting, but may also be oriented downward.

### LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).

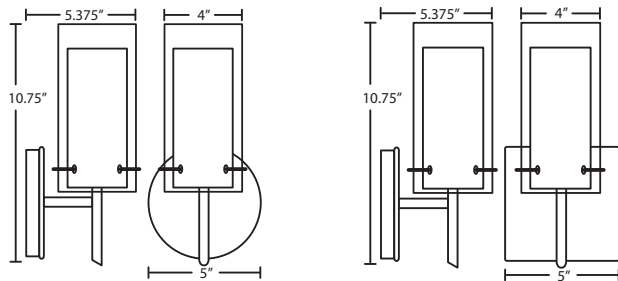

PAHU 4 SHOWN IN TRANS. ARMAGNAC/OPAL (A44007) & TRANS. GOLD/OPAL (Y44007)

C44007 CLEAR/OPAL      A44007 TRANS. AMETHYST/OPAL      S44007 TRANS. SMOKE/OPAL      L44007 TRANS. OLIVE/OPAL



## ORDERING:

FIXTURE	GLASS OPTIONS	METAL FINISH	METAL FINISH	OPTIONS
1SW Sconce	A44007 Trans. Amethyst/Opal C44007 Clear/Opal G44007 Trans. Armagnac/Opal L44007 Trans. Olive/Opal S44007 Trans. Smoke/Opal Y44007 Trans. Gold/Opal	(blank) 40W G9 Hal LED 5W LED 120V, dimmable	BR Bronze CR Chrome SN Satin Nickel	SQ Square Canopy

### Ex. 1SW-G44007-SN

Pahu 4 Mini Sconce w/ Trans. Armagnac/Opal Glass,  
Satin Nickel Finish

**Project Information:**

### LED SCONCES:

- Total power of only 5 watts
- Dimmable with a standard dimmer
- Rated life: 25,000 hours
- 450 lumens
- CCT: 3000° Kelvin
- CRI: 80+

All dimensions provided are nominal.  
Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 7/15