

Project:


Thin-Line LED Pendant Spec Sheet

SKU: 2818.16-4-35 Learn more at:
<https://sonnemanlight.com/thin-line-led-pendant>

Description:

A system of minimally scaled LED linear pendants, [uplight/downlight wall bars](#), and [indirect light wall bars](#), Thin-Line is offered in a variety of lengths, finishes, and lighting configurations. Thin-Line pendants are available in single- and double-sided configurations; the single-sided configurations can be installed as a downlight or up-light, providing direct or indirect illumination. Our [Optional Mini Box Canopy](#) is also available for the Thin-Line LED Pendant.

Type #:

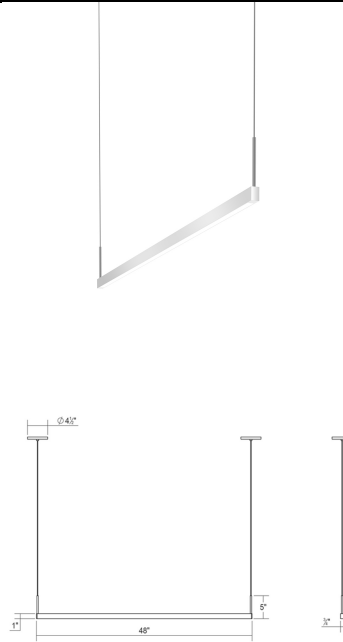

Dimensions

Height: 5"
Width: 48"
Length: 0.75"
Canopy/Backplate/Base: 4.5"
Size: 4' Two-Sided

Installation

Installation: Licensed electrician required
Sloped Ceiling Compatible?: Compatible
Minimum Hanging Height: 5.75"
Maximum Hanging Height: 73.75"

General Listings

Features: Damp Rated
Certification: C-ETL-US
Color/Finish: Bright Satin Aluminum (.16)

Electrical Specs

Bulb(s) Included?: Yes
Bulb 1 Type: Integral LED
Bulb Quantity: 2
Input Voltage: 120VAC
Wattage: 44
Initial Lumens: 2910
Delivered Lumens: 1800
Color Temperature: 3500K
CRI: 90
Power Supply Type: Driver
Power Supply Quantity: 2
Power Supply Location: Remote
Dimming Type: TRIAC/ELV

Shipping

Carton 1 L x W x H: 51" X 7" X 4"
Carton 1 Gross Weight: 7 LBS

Shade

Shade 1 Material: Aluminum w/Optical Acrylic

Available Finishes

Available Finishes: Bright Satin Aluminum (.16), Satin Black (.25), Satin White (.03)