


LANDSCAPE LIGHTING

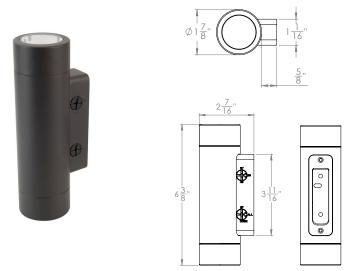

Fixture Type:	
Catalog Number	
Project:	

PRODUCT DESCRIPTION

Landscape 12V wall mount cylinder up and down light with 3 CCT selection and adjustable beam angles.

FEATURES

- Continuously Adjustable Beam Angles. Indexed at 35°, 45°, 55°
- IP66 rated, Protected against high-pressure water jets
- · Corrosion resistant aluminum
- Factory sealed water tight fixtures
- Constant output for 9V-15V input
- Can be used as an uplight or downlight or both
- 2700K/3000K/4000K selectable
- 10' lead wire and direct burial gel filled wire nuts included
- MLV dimmable with remote MLV dimmers

SPECIFICATIONS

Location:

 Input:
 9 - 15 VAC


 Power:
 7.5 W / 9.0 VA

 Brightness:
 325 Im per light


 Beam Angle:
 35° to 55°

 CRI:
 85

 Rated Life:
 50,000 hours



Select Up Light, Down Light or Both





elect Warm White, Pure White, or Cool White

ORDERING NUMBER

		Colo	r Temp	Finish		
			2700K Warm White			
		27	or	BK	Black on Aluminum	
3611	12V	30	3000K Pure White	BZ	Bronze on Aluminum	
		40	or	WT	White on Aluminum	
			4000K Cool White			

3611-27/30/40

Example: 3611-27/30/40BZ

CYLINDER WALL MOUNT 12V

3611



Accessories

Optics



LENS-11-AMB Amber LENS-11-BLU LENS-11-GRN LENS-11-RED

Green Red

LENS-11-RF

Frosted

Enhances saturation of florals and foliage

Magnetic Transformers

Stainless Steel, 12-15V output, IP65 rated, UL 1838 listed See transformer spec sheet for details and its accessories

9075-TRN-SS 75W Max

9150-TRN-SS 150W Max

9300-TRN-SS 300W Max

9600-TRN-SS 600W Max

