

# ORION Wall Sconce

120v : **3-540-xx**

277v : **37-540-xx**

# oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_



-24 Satin Nickel




-14 Polished Chrome



-40 Aged Brass

<b>LIGHT SOURCE</b>	1 x 11.9W LED, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	15.4W at 120V
<b>RATED LIFE</b>	60000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	2700K, 3500K, 4000K
<b>LUMEN OUTPUT</b>	Delivered: 926 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V or 277V
<b>DRIVER OUTPUT</b>	350mA, 12W
<b>DIMMING</b>	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
<b>CONSTRUCTION</b>	Plated Steel and Acrylic
<b>DIFFUSER</b>	- Matte White Acrylic
<b>FINISHES</b>	Polished Chrome (-14), Satin Nickel (-24), Aged Brass (-40)
<b>MOUNTING</b>	4"x4" J-Box*, 2"x3" J-Box** *Deep J-Box, **Deep J-Box and must be mounted horizontally
<b>STANDARDS</b>	ETL Dry/Damp listed, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

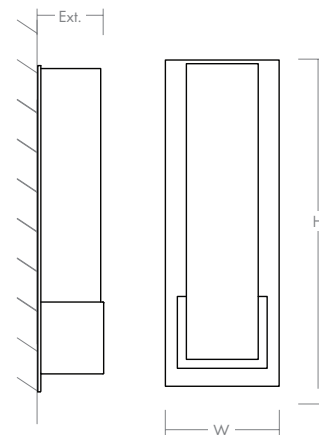

#### DIMENSIONS

**W:** 4.75"

**H:** 13.63"

**Ext:** 2.80"

**M.C:** 10.78" From top of fixture

Order example for standard fixture:

**3-540-24** (x- Voltage - xxx-Sequence # - xx-Finish)

**3:** 120v, **37:** 277v

Order example for optional color temperatures: **3-540-2724**

**27:** 2700K, **35:** 3500K, **40:** 4000K

