


# ASSEMBLY INSTRUCTIONS

## ITEM DESCRIPTION:

ITEM NO.: 89027	NAME: Waldorf Small Chandelier
MATERIAL TYPE: Steel	FINISH: Antique Brass
SOCKET TYPE: E12	SOCKET QTY: 8
BULB WATTAGE: 40W/CFL 10W/LED 9W	
VOLTAGE: 110-120 V	ITEM NET WEIGHT: 17.5LBS

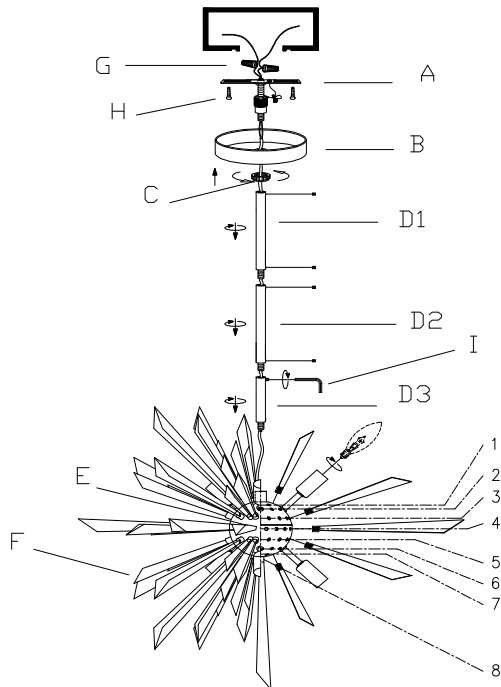

## TO ASSEMBLE:

1. Remove all packing contents from the carton(s) carefully.
2. Remove all parts from the package(s) carefully.
3. Please be sure you have all parts indicated before you begin assembly.
4. Shut off the main electrical supply from the main fuse box/circuit breaker.
5. Screw the metal "arrows" on the desired threading pitches on sphere box(e) as page 2 illustrations.
6. Screw the rod(d3) to the main body(f), and tighten the hexangular screw in the
7. side desire hole by allen wrench(h). repeat the same operation on the rod (d1) and (d2).
8. Remove the mounting plate(a)from the canopy(b)by turning collar loop (c) in a counterclockwise direction carefully inspect the pendant's fixture wires. The neutral fixture wire has very fine ridges molded into its plastic covering. The hot fixture wire has a smooth covering. The bare silver wire is the grounded wire.
9. Attach the ground wire from the fixture to the ground junction box wire from the outlet (usually green) or bare wire). Fasten each together with a plastic wire connector (g) and wrap the connection with electrical tape. If your outlet box does not have a ground wire, insert the green ground screw into the mounting plate (a) facing down, and wrap the fixture's bare ground wire around the ground screw. It is imperative that the outlet box in your home be properly grounded.
10. Connect the neutral fixture wire to the neutral junction box wire (usually white). Fasten each together with a wire connector (g) and wrap the connection with electrical tape. Be sure no strands are exposed.
11. Connect the hot fixture wire to the hot junction box wire (usually black). Fasten each together with a plastic wire connector (g) and wrap the connection with electrical tape. Be sure no wire strands are exposed. Do not reverse the hot and neutral connections or safety will be compromised.
12. Gently truck the wire connections neatly into the ceiling junction box.
13. Attach the mounting plate (a) with nipple to the ceiling outlet box using the enclosed mounting screws (h) and tighten screws with a screwdriver.
14. Push collar loop in canopy (b) and thread onto nipple in mounting plate (a) by turning in a clockwise
15. Screw rod (d1) to canopy (c), using hexangular screw and allen wrench(i) be sure all the hexangular screws were tight enough.
16. Insert eight type b 40w bulb (not included) into the sockets. Do not exceed specified wattage.
17. Restore power to junction box and test fixture. DO NOT EXCEED SPECIFIED WATTAGE OF PENDANT.

## PARTS INCLUDED:

A Mounting Plate	Qty: 1	L Large Arrow	Qty: 29
B Canopy	Qty: 1	M Medium Arrow	Qty: 28
C Collar Loop	Qty: 1	S Small Arroww	Qty: 20
D Rods	Qty: 4		
E Metal Shade	Qty: 1		
F Pipe	Qty: 1		

## HARDWARE INCLUDED:

Mounting Screws	2 Pcs	Canopy Screws	2 Pcs
Plastic Wire Connector	2 Pc	Allen Wrench	1 Pc
Green Ground Screw	1 Pc		

## TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation of this chandelier. We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

## CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

ARTERIOS