Rhett Flush Mount

7569093S I

GENERATION LIGHTING FLUSHMOUNT

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction hoves

This product is safety listed for damp locations.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.


SAVE THESE INSTRUCTIONS!

⊕			

GENERATION LIGHTING

7400 Linder Ave., Skokie, IL 60077 T 847.410.4400 | F 847.410.4500 www.generationlighting.com

Install the Fixture

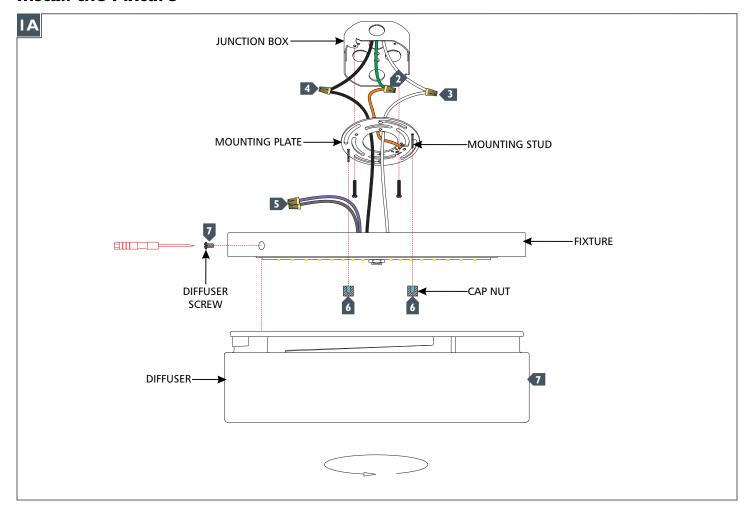

- I Secure the mounting plate to the junction box.
- 2 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 3 Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 4 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- If using dimming, connect the purple and gray wires to a compatible dimmer. If not using dimming, make sure to cap the purple and gray wires.
- Neatly place all the wires into the junction box, place the fixture onto the mounting studs, and secure it in place by screwing the cap nuts onto the studs.
- Align the diffuser to the fixture, screw it in the fixture, and secure it in place with the diffuser screw.