

OPUS Pendant

120v : **3-654-xxx**

277v : **37-654-xxx**

oxygen

FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____




-14 Polished Chrome



-24 Satin Nickel



-25 Satin Copper




-40 Aged Brass

Diffusers:




-1 White Opal Glass



- Matte White Acrylic

LIGHT SOURCE	1 x 5.12W LED, 3000K, CRI 90
LUMINAIRE POWER	6.69W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: (-1) Glass: 412 lm (LM-79) Acrylic: 399 lm (LM-79)
INPUT VOLTAGE	120V or 277V
DRIVER OUTPUT	150mA, 6W
DIMMING	0-10v & Phase (ELV) Dimming - 50/60hz 100% to 10% Dimming
CONSTRUCTION	Plated Steel and Acrylic /or Glass
METAL FINISH / DIFFUSER	(-114) White Opal Glass / Polished Chrome (-124) White Opal Glass / Satin Nickel (-125) White Opal Glass / Satin Copper (-140) White Opal Glass / Aged Brass (-14) Matte White Acrylic / Polished Chrome (-24) Matte White Acrylic / Satin Nickel (-25) Matte White Acrylic / Satin Copper (-40) Matte White Acrylic / Aged Brass
MOUNTING	4" Octagonal J-Box, 2" x 3" J-Box
STANDARDS	ETL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

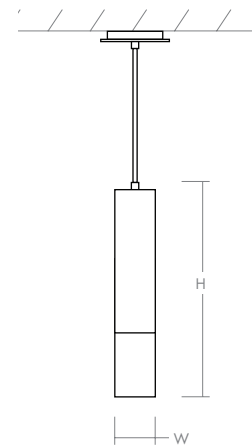

DIMENSIONS

Dia. Canopy: 5.88"

Dia. Fixture: 3.50"

H. Fixture: 18.62"

Supplied with 8 ft braided cord

Order example for standard fixture:

3-654-124 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v, 37: 277v

Order example for optional color temperatures: **3-654-27124**

27: 2700K, 35: 3500K, 40: 4000K

