

TP20035AB INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

CAUTION

WARNING: Risk of Fire. Consult a qualified electrician to ensure correct branch circuit conductor. Min 90°C supply conductors.

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL


All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

1. Put swivel (14) through the center hole on canopy (12) and secure with lock nuts (11).
2. Choose your desired length of stems (17)(18)(19), and then pass the power supply cord and ground wire through stems (16) (17)(18), washer (15), swivel (14), canopy (12), and lock nuts (11).
3. Connect stems (16) (17)(18) one by one, then connect lower end of stem (18) onto lamp body (19) and upper end of stem (16) into swivel (14).
4. Thread canopy screws (08) through mounting bar(06).
5. Attach mounting bar (06) to outlet box (01) with box screws (09).
6. Make wire connection with white Wire (02) and black wire (03). Use wire connectors (05) to secure the connections. Secure ground wire (04) and ground wire from the fixture to mounting bar (06) with ground screw (07).
7. Attach the canopy(12) against the outlet box(01) and secure with the ball nut(13).
8. Put glass shades (21) over sockets (20) and secure with socket ring (22).

INSTALLATION IS NOW COMPLETE

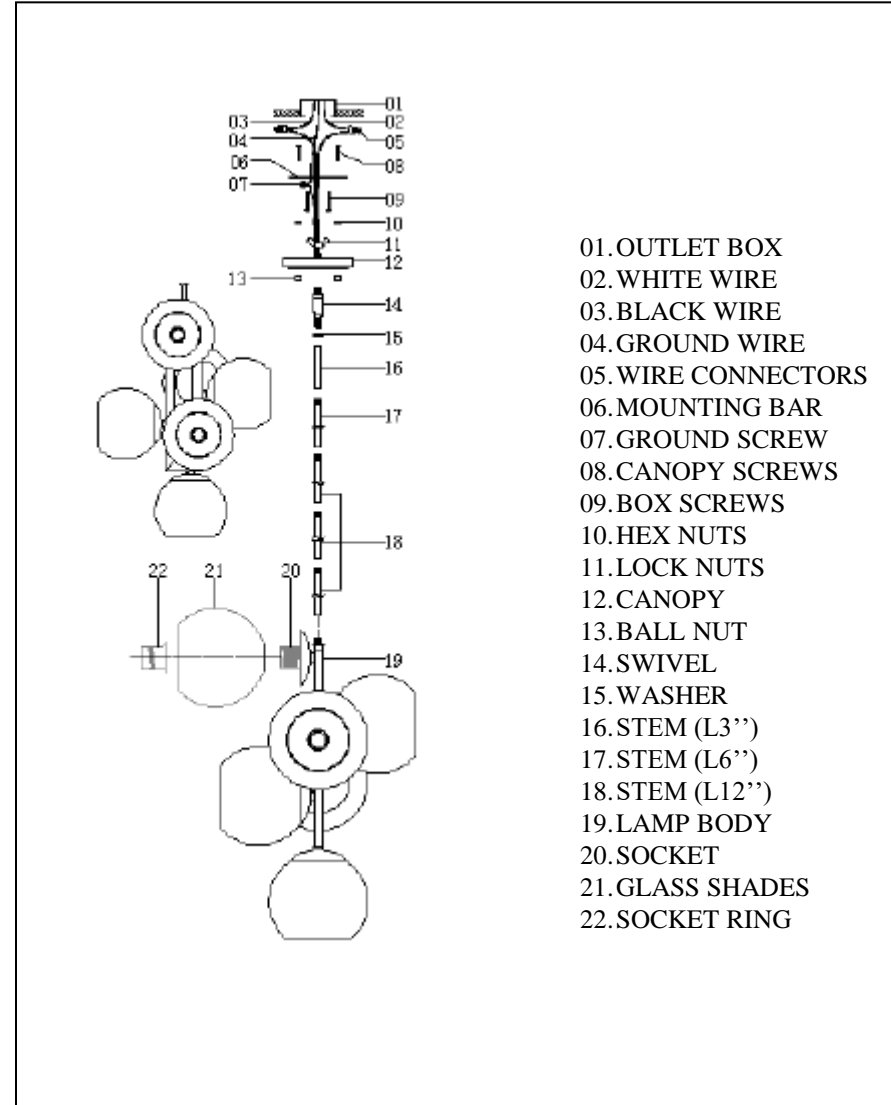

- 01. OUTLET BOX
- 02. WHITE WIRE
- 03. BLACK WIRE
- 04. GROUND WIRE
- 05. WIRE CONNECTORS
- 06. MOUNTING BAR
- 07. GROUND SCREW
- 08. CANOPY SCREWS
- 09. BOX SCREWS
- 10. HEX NUTS
- 11. LOCK NUTS
- 12. CANOPY
- 13. BALL NUT
- 14. SWIVEL
- 15. WASHER
- 16. STEM (L3'')
- 17. STEM (L6'')
- 18. STEM (L12'')
- 19. LAMP BODY
- 20. SOCKET
- 21. GLASS SHADES
- 22. SOCKET RING