

## Collection:


Installation manual for:

LD5025 D12"H15"L1

## Installation instructions:

- 1.Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3."E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert screws(P2) in side of top unit the mounting bracket.
- 6. Fix the loop (P3) to screw tube, then cover the canopy (P4) and fix it by canopy ring(P5).
- 7.Install the bulbs(not included) into the lamp fixture.
- 8. Fix the metal bottom cover(P14) into the crystal frame(P13).

## The end!

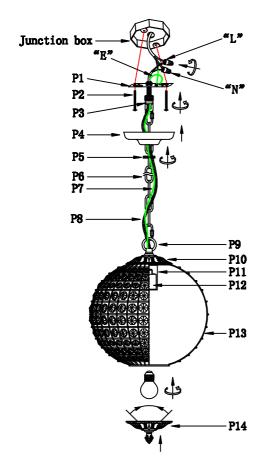

"L" = Hot wire
"N" = Neutral wire
"E" = Ground wire

## PARTS LIST

part	picture	Description	Qty	Check	list
P1		L4" Mounting bracket	1		
P2		5/32-32 Screw	2		
Р3		Canopy loop (Canopy part)	1		
P4	<b>\</b>	Ø5.1" canopy plat	1		
P5		Canopy ring (Canopy part)	1		
P6	<del></del>	L59°CHAINO4P Plain Design	1		
P7	\	ground wire	1		
P8	~	Power Cord 79" SPT-1-18# Brown	1		
P9	Q	W1.5"*H1.7" Quick link	1		
P10		metal top cover	1		
P11		D1.6"*L2.4" metal lampcap	1		
P12	Ů	E26 lampholder	1		
P13		Ø12" crytal frame	1		
P14		metal bottom cover	1		