

Sevier I Light Outdoor Wall

8338701, 8338751, 8438701, 8438751 | I.1

GENERATION LIGHTING

WALL

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for wet locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

GENERATION LIGHTING



7400 Linder Ave, Skokie, IL 160077

800.969.3347

www.generationlighting.com

© 2020 Generation Lighting. All rights reserved.


The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

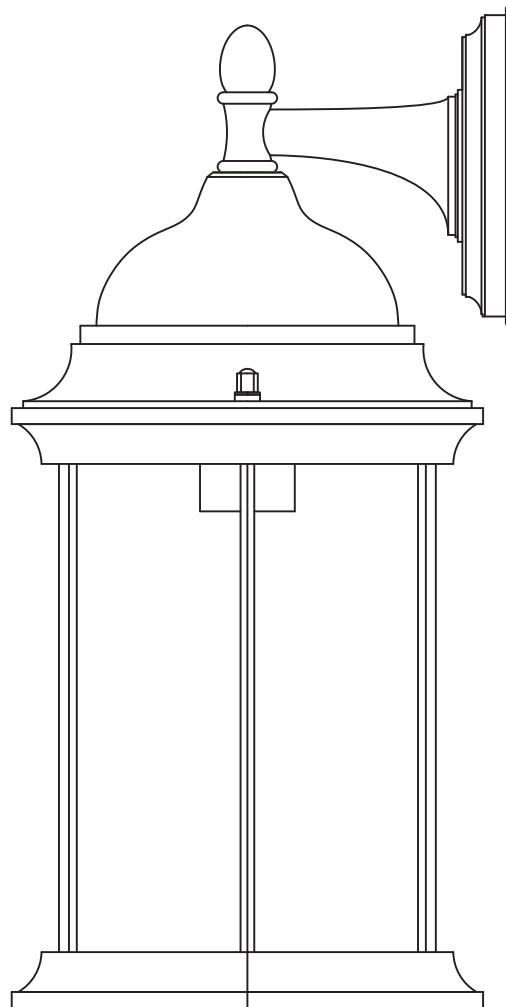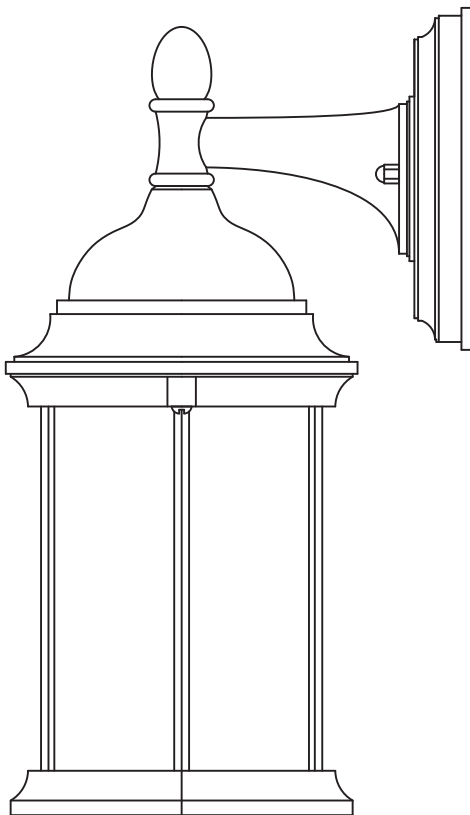

SAVE THESE INSTRUCTIONS!

Install the Fixture

IA

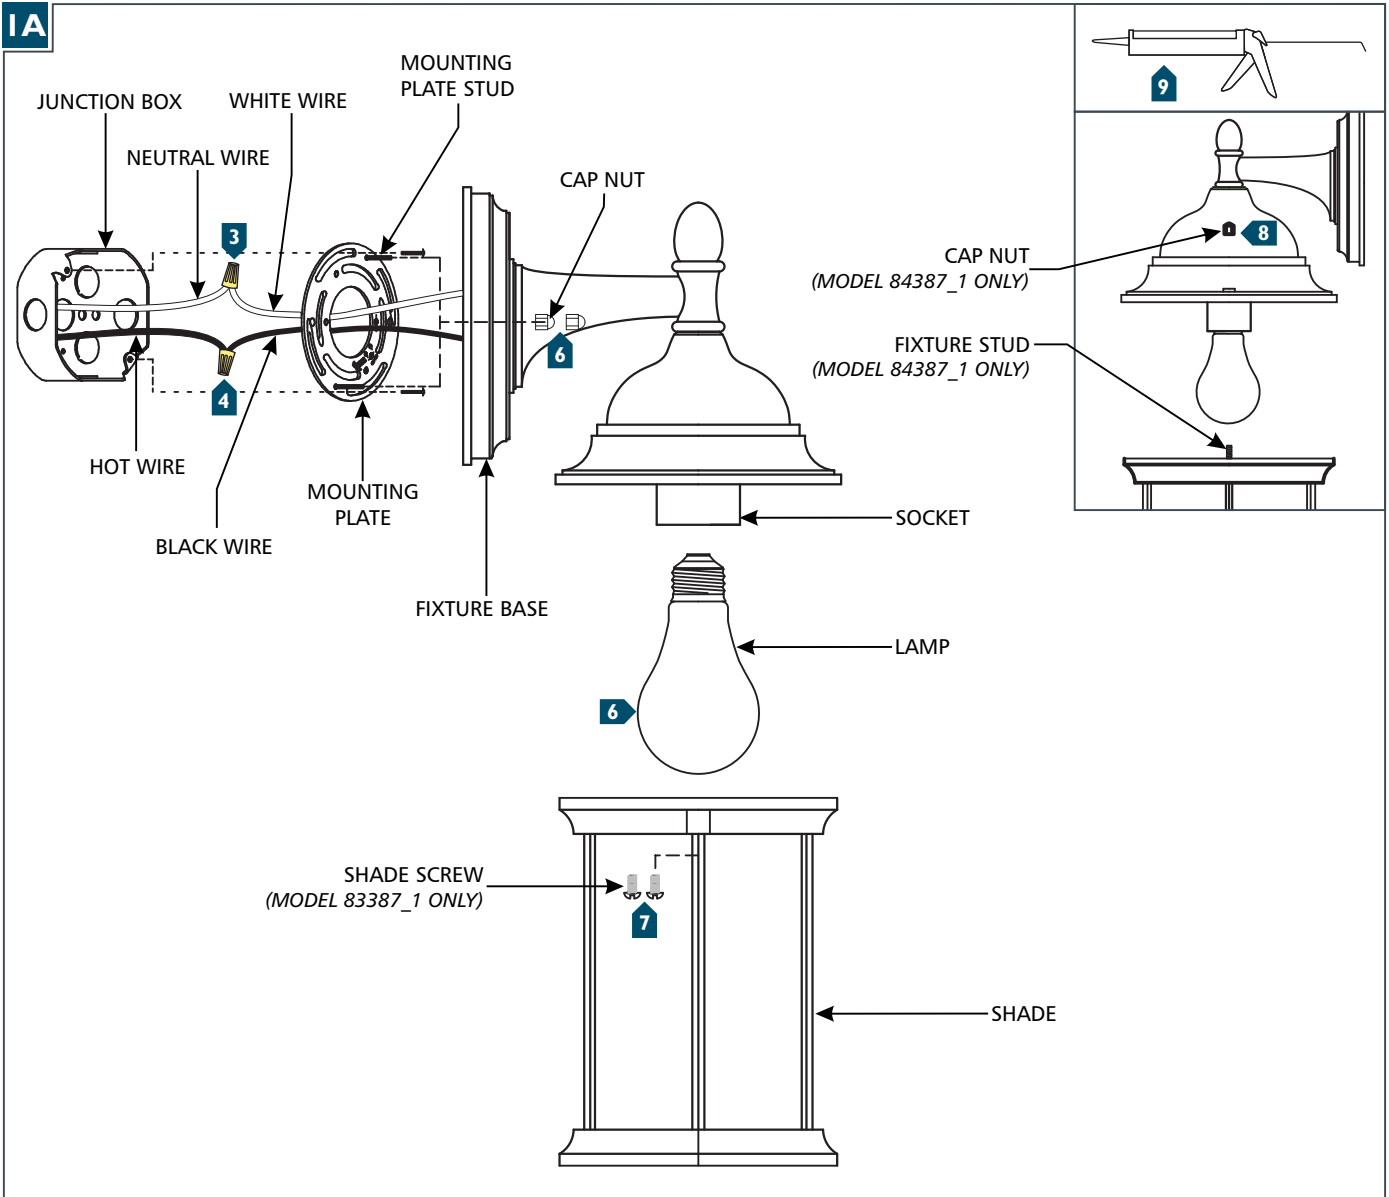

- 1** Secure the mounting plate to the junction box.
- 2** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 3** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 4** Connect the black fixture wire to the hot power line wire with a wire nut.
- 5** Align and place the fixture base onto the mounting plate studs and secure it with the two cap nuts.
- 6** Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.
- 7** For Model 83387_1: Install the shade to the fixture and secure it in place with the fixture screws. **Skip to step 9.**
- 8** For Model 84387_1: Insert shade studs into the fixture and secure the shade in place with the cap nuts.
- 9** For wet locations, caulk around the base of the fixture with waterproof construction sealant.