

LOW-VOLTAGE PENDANTS

Zenith Pendant



DESCRIPTION

Slender, organic-shaped glass with vertical stringers to add depth and dimension. Includes low-voltage, 50 watt halogen bi-pin lamp or 8 watt replaceable 500 lumen 80 CRI 3000K LED SORAA® module and six feet of field-cutttable suspension cable.

INSTALLATION



Socket terminates with FreeJack male connector, which may be installed into a system connector. Elements ordered with a system prefix include a connector for that system.

WEIGHT

2.02lb / 0.92kg ±



smoke

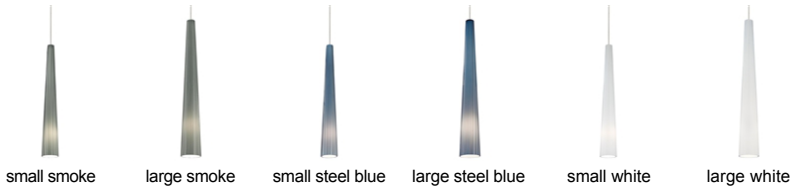

ORDERING INFORMATION

700	SYSTEM	ZEN	SHAPE OR SIZE	COLOR	FINISH	LAMP		
FJ	FREEJACK	L	LARGE	K	SMOKE	Z	ANTIQUE BRONZE	12 VOLT HALOGEN
MP	MONOPOINT	S	SMALL	U	STEEL BLUE	C	CHROME	-LEDS830 12 VOLT LED 80 CRI 3000K
MO	MONORAIL			W	WHITE	S	SATIN NICKEL	-24 24 VOLT HALOGEN
MO2	TWO-CIRCUIT MONORAIL							

Note: MP includes 4" Round Flush Canopy. Note: MP includes 4 Round Flush Canopy.

When installing LED option on MO2 only magnetic transformers may be used.



TECH LIGHTING®

7400 Linder Avenue T 847.410.4400
Skokie, Illinois 60077 F 847.410.4500

Tech Lighting, L.L.C.

700 ____ ZEN ____

FIXTURE TYPE: _____

JOB NAME: _____

NOTES: _____



©2015 Tech Lighting, L.L.C. All Rights Reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.