## GENERATION LIGHTING


### **Outdoor**

## **GENERAL PRODUCT INFORMATION:**

This product is safety listed for wet locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information..

This instruction shows a typical installation.

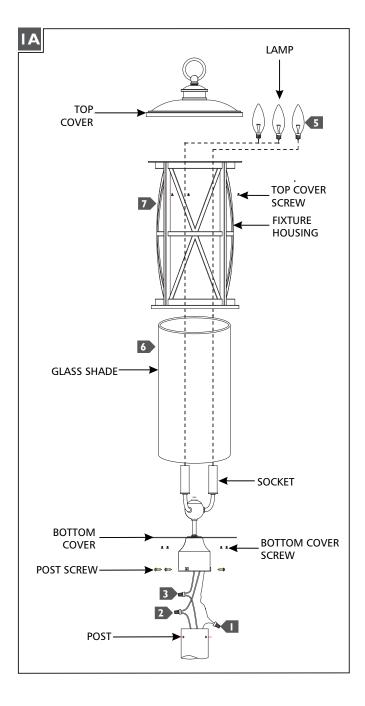

#### **CAUTION - RISK OF FIRE**

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

- Connect the fixture to a suitable ground in accordance to local electrical codes.
- Connect the white fixture wire to the neutral power line wire with a wire nut.
- 3 Connect the black fixture wire to the hot power line wire with a wire nut.
- 4 Secure the fixture to the post with the post screws making sure to neatly tuck in all wiring.
- Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.
- Install glass shade by carefully sliding it into the fixture housing.
- Lower the fixture housing on to the bottom cover and secure with provided cover screws.
- Place the cover over the frame and secure with provided top cover screws.

# **SAVETHESE INSTRUCTIONS!**

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077 800.969.3347

## www.generationlighting.com

© 2019 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.