

LIVING DISTRICT

Collection:Axel











Installation manual for:


LD8003D17BR D17" H16.6" L6

Installation instructions:

1. Check all of the package contents before installation.
2. Install the mounting bracket (P1) to the outlet box using the screws (P2).
3. Connect the wire with L marking from the fixture to the BLACK wire from the outlet box.
4. Connect the wire with N marking from the fixture to the WHITE wire from the outlet box.
5. Loop the grounding wire (E wire) from the fixture under the head of the green ground screw on the mounting bracket (P1) and connect it to the grounding conductor from the supply circuit.
6. Adjust the angle of the fixture arms. Align the holes in the fixture with the mounting screws (P3) and secure it by screwing the ball nuts (P4).
7. Install the light bulbs (not included) into the sockets (P5).
8. Connect the power.

PARTS LIST

| part | picture | Description | Qty | Check list |
|------|---|------------------|-----|------------|
| P1 |  | mounting bracket | 1 | |
| P2 |  | 8/32" Screw | 2 | |
| P3 |  | 8/32" Screw | 2 | |
| P4 |  | Ball Nut | 2 | |
| P5 |  | E26 Socket | 6 | |
| P6 |  | Cup | 6 | |
| P7 |  | ∅4.7*H1 Canopy | 1 | |
| P8 |  | Arm | 3 | |
| P9 |  | Box | 1 | |
| P10 |  | Finial | 1 | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

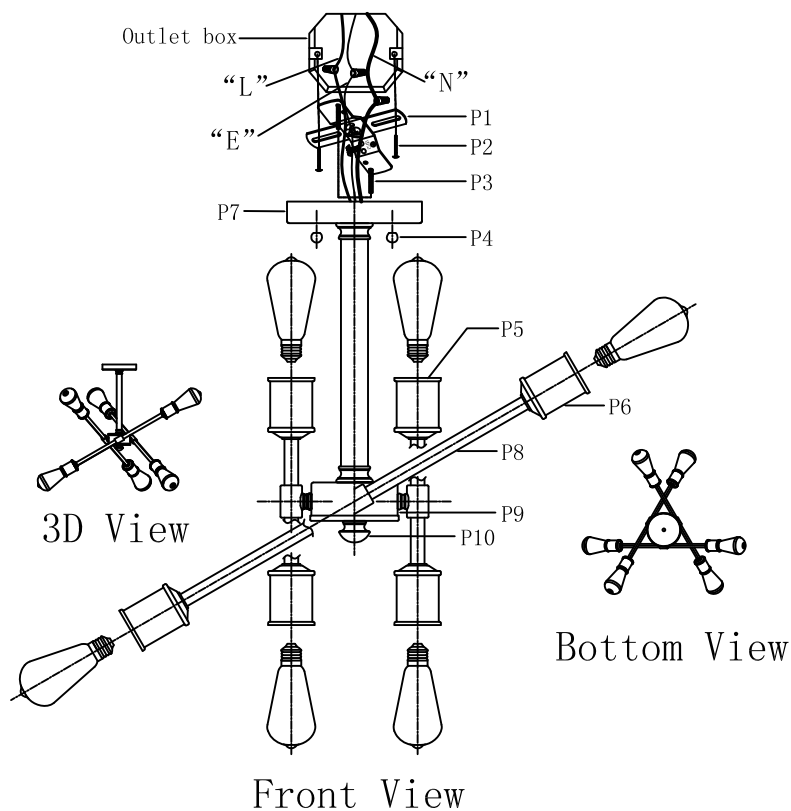

"L" = Hot wire
 "N" = Neutral wire
 "E" = Ground wire