


CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS




Crystorama.com

ASSEMBLY INSTRUCTION MODEL # 528P-SA

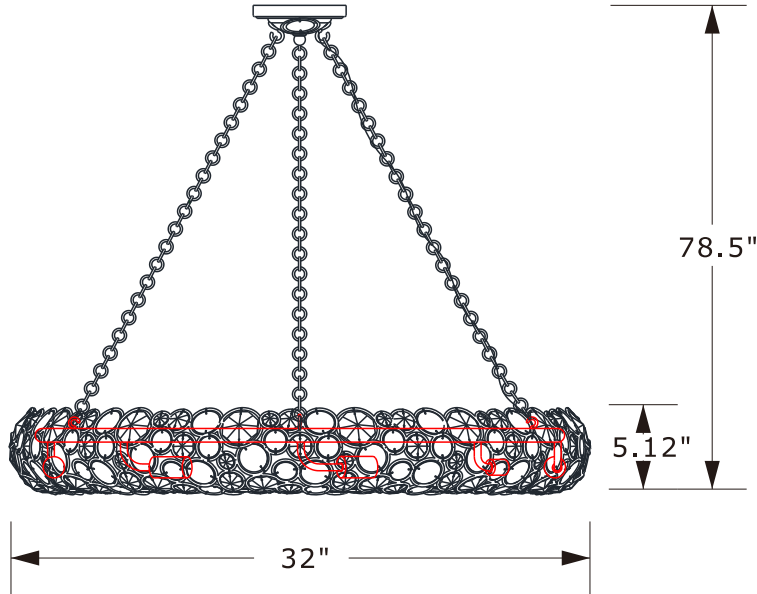

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 8 -Candelabra Base Bulb

40 Watts Recommended 60 Watts Max.


USE LED BULBS FOR EXTENDED USE

THE FIXTURE IS DAMP RATED

How to install

1. Determine the preferred hanging height and adjust the chain accordingly.
2. Take one hanging chain. Hang one end onto the hook under the canopy and hang the other end onto the hook inside the frame. Repeat for the other two chains.
3. Weave the fixture wire through one of the hanging chains and through the canopy.
4. Install the mounting bar onto the outlet box.
5. Raise the fixture up and do the wire connection. Place the decorative cover over the canopy and secure with hex nut and cap nut.

SEMI FLUSH

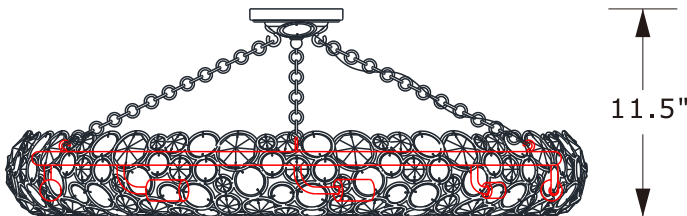

Crystal Sets

A= 50mm 42PCS

B= 40mm 18PCS

C= 30mm 18PCS

Capiz Shell Sets

C= 40mm 141PCS

D= 30mm 156PCS

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov.


CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS



Crystorama.com

PART NUMBER MODEL # 528P-SA

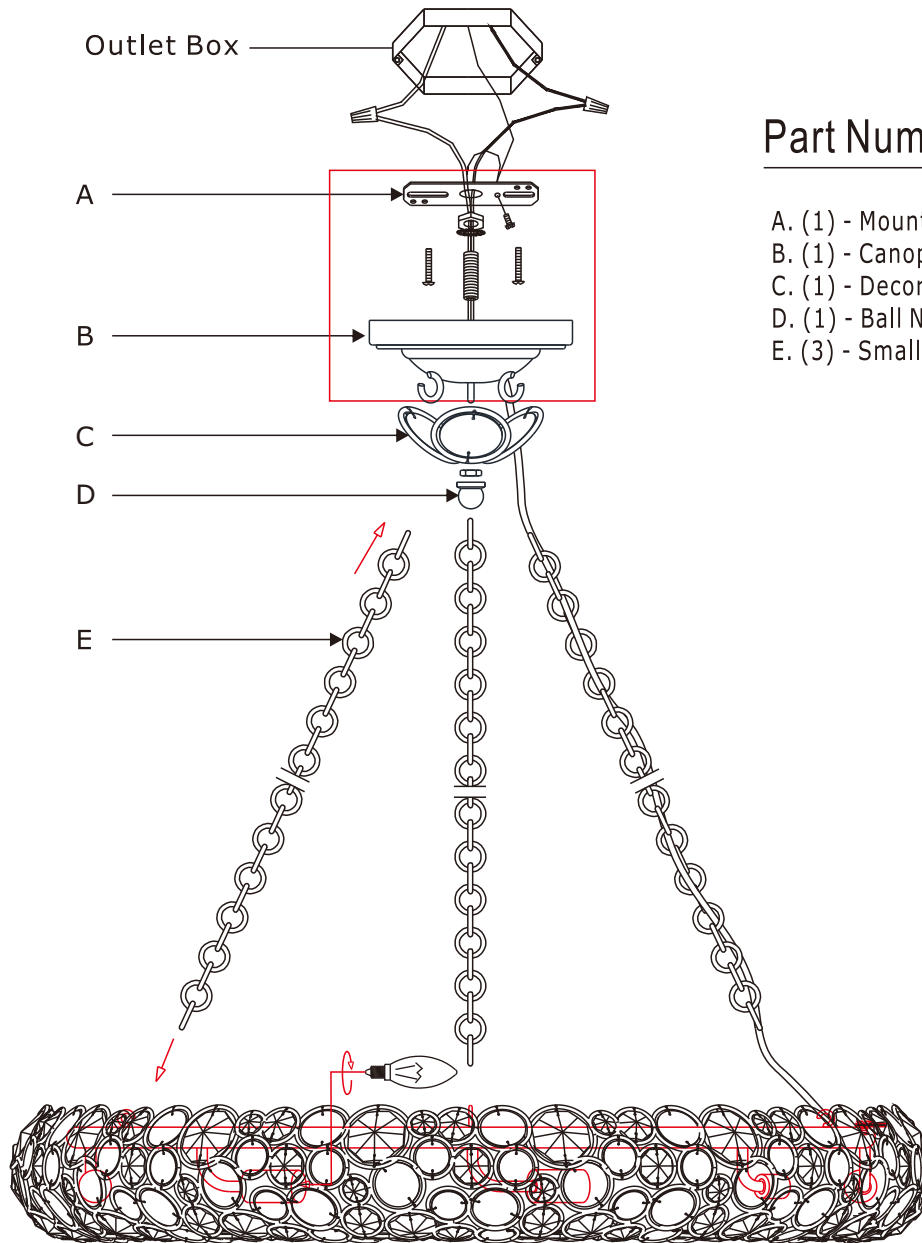

Part Number

- A. (1) - Mounting Hardware
- B. (1) - Canopy(W5.1",H1.7") XRE525SACAN5.1IN
- C. (1) - Decorative cover
- D. (1) - Ball Nut #XRE525SABANUT
- E. (3) - Small Hanging Chain(72"3mm) #XRE525SACHA3MM