

STEP 4 – Wire Connections

A. Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

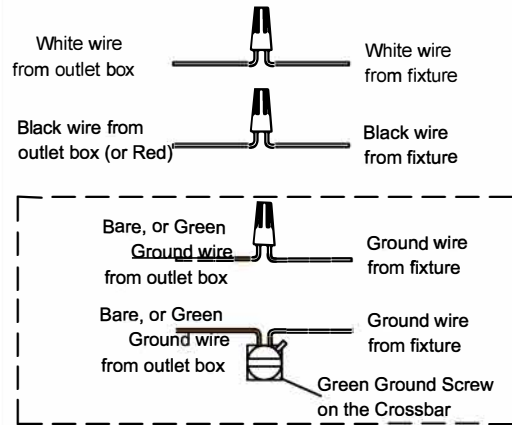


Figure 3

STEP 5 – Install Backplate to Ceiling.

A. Place **Backplate** over the Mounting bracket (DD). Line up the hole on the **Backplate** and the mounting hole on the Mounting bracket, secure by threading Mounting Screw (CC) into the Mounting bracket (DD), tighten until snug.

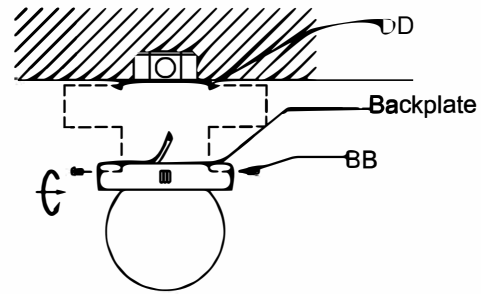


Figure 4