




LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL #5169-EB-CL-MWP

IMPORTANT: FOR A SAFE AND SECURE INSTALLATION, THESE FIXTURES MUST BE INSTALLED BY MEANS OF SUPPORTS THAT ARE INDEPENDENT OF THE OUTLET BOX.

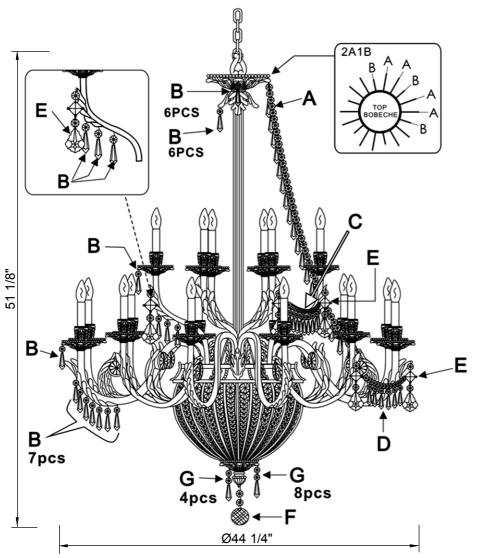












Crystal Sets

- A. 12 Set. 14mm*44+38mm*20
- B. 258 Set. 14mm+38mm
- C. 6 Set. 14mm*20+(14mm+38mm)*9
- D. 12 Set. 14mm*14+(14mm+38mm)*6
- E. 18 Set. 14mm+18mm+14mm+76mm
- F. 1 Set. 14mm+14mm+60mm G. 12 Set. 14mm+14mm+38mm



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 23 - Candelabra Bulb 25 Watts Recommended 40 Watts Max. USE LED BULBS FOR EXTENDED USE

How to Install

- 1. Adjust each arm until they are at an equal distance from one another.
- 2. Screw long nipple into coupling on top of fixture and secure with nut.
- 3. Place long tube, big check ring, leaf and cap over nipple and secure with nut and
- 4. Pass longer threaded pipe through the outlet box and attach it to ceiling joist and secure it with nut.
- 5. Slide collar ring and canopy over chain. Thread screw collar onto the nipple.
- 6. Connect chain to the screw collar with quick link. Connect chain to the loop with another quick link.
- 7. Feed wires and safety cable up through chain and pass wires through holes in screw collar, exiting through the side of
- 8. Feed the safety cable through the lock and coil it around the hickey twice, using a circular motion. Then feed the cable through the lock again and tighten it down with the lock screw. Continue to run the cable through the top of the outlet box and secure it to a supporting ceiling joist or a structural member
- 9. Connect the fixture wires to the supply wires.
- 10. Secure canopy with screw collar ring.
- 11. Install the bulb (Not included) in accordance with the fixture's specifications. (DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)
- 12. Screw short nipple into coupling on bottom of fixture and secure with nut.
- 13. Place short tube and small check ring over nipple and secure with nut.
- 14. Place basket over nipple and secure with nut.
- 15. Place cap over nipple and secure with finial.
- 16. Hook crystal on the body as shown.

MARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov



LIGHTING THE WAY FOR SIXTY YEARS

PART NUMBER MODEL #5169-EB-CL-MWP

