



C

Collections

AL LL™ 100
Anrendale198
Ahrendale [™] 198 Arkwet [™] Weather+ [™]
Arvada [™] 168
Basics Pro260
Bisc [™]
Bise
Cameron
Canfield [™] 230
Canfield [™] 230 Canfield [™] Weather+ [™] 110
Carlson [™] 152
Cavelli
Chiara
Colerne [™]
Crescent
Daya
Daya
Eads [™] Patio204
Eyrie
Ferron [™]
Geno [™]
Gentry 58
Guardian76
Hatteras Bay [™] 192
Humble
Icon
Imari
Incus [™] 172
Jace [™]
Vanana 170
Kapono170 Kevlar [™] Weather+ [™] 108
Kosmus
Leeds [™]
Lehr Weather+ 100
Lija196
Link [™]
Lucian [™]
Lydra [™] 72
Lyndon [™] Patio128
Maeve [™]
Monarch [™] 154
Motu [™]
Pinion202
Pola [™]
Rana [™] 150
Renew [™] 248
Ridley [™] II
Ried 92
Rise
Salvo
Salvo
Sola
Spyn208
Spyra164
Starkk [™] 224
Starkk [™]
Sutter Place [™] Select
Szeplo [™] Patio66
Terna [™] 190
Terra Select
Tide
Tide
Todo [™]
Tranquil
Tranquil Weather+ [™]
Vassar [™]
Verdi
Vinea
Volos
Zeus
100

Trend-Forward Designs in Motion

mult

From modern-inspired styles to traditional, classic looks, our ceiling fans combine both style and function with technology. These trendy, all-in-one appliances are perfect for opening up a space or enhancing a smaller area while delivering light, circulation, and comfort to any room. Discover the perfect mix for your space.


Contents

Tips for Selecting a Ceiling Fan: From Style & Size to Controls & Airflow13-21

Extras

Fan Finish Swatch Guide 2	92
APS and Abbreviation Key2	94
Index by Item Number2	95



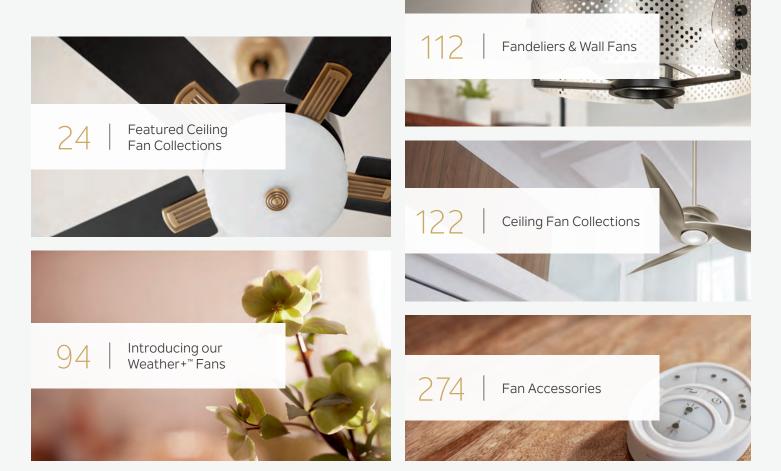

Creating Inspiration Through Collaboration

Throughout this catalog, you'll see imagery of our ceiling fans paired with products from our sister brands Delta® Faucet, Brizo®, Behr® Products, and Liberty Hardware®. Partnerships like these help us further the creative vision when pairing ceiling fans, lighting, and other decorative fixtures together. Visit their company websites for more product information and inspiration.










Symbol Guide & Visual Index

LED	Integrated LED	Incorporates LEDs directly into the ceiling fan.
	Dimmable	Is dimmable when paired with our wall control or handheld remote.
AC	AC Motor	Simple to install, pairs to controls, and is compatible with a variety of optional accessories.
DC	DC Motor	Lightweight, quieter, and uses up to 70% less electricity than an AC motor ceiling fan.
Ø	Reversible Blades	Offers two different blade finish options to select from.
Lourgy Ja	Energy Star®	Trusted, government-backed symbol for energy-efficient products.
D	Damp rated	Designed for use in covered outdoor areas or indoor areas where the fan may be exposed to high humidity or light moisture. Not intended for uncovered use where it will be directly exposed to water.
W	Wet rated	Designed for outdoor use. Waterproof, can be used in high-moisture areas and direct exposure to rain/water.
W+	Weather+™	Designed to withstand wet rated weather conditions, plus combat the effect of certain environmental factors such as saltwater spray and impact from UV rays.

Featured Ceiling Fan Collections

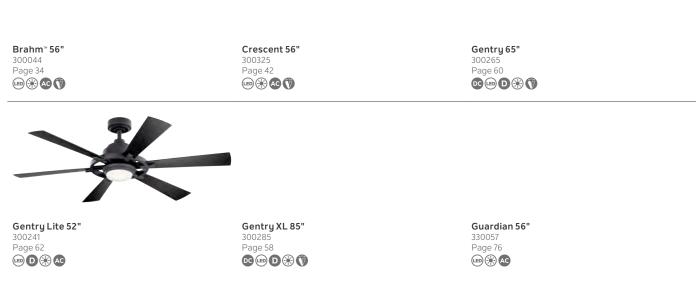

Humble 60"	lcon 56"	Imari 65"	
300415 Page 46	300395 Page 30	300365 Page 88	

Lydra™ 52"	Maeve [™] 52"	Ried 56"	
310073	300059	300356	
Page 72	Page 84	Page 92	
D 🏵 AC 🕅		DAG	

Rise 60"	Salvo 56"	Szeplo[~] Patio 60"	
300370	330045	300300	
Page 38 💁 📾 🏵 🕥	Page 80	Page 68 🚾 📾 ₩ 🟵	

Szeplo [™] Patio 80"	Tide 52"	Tranquil 56"	
300301	310075	310080	
Page 66		Page 54	




AC Motor = 🕲 DC Motor = 🕲 Damp Rated = 🗿 Wet Rated = 🕲 Weather+* = 👹 Integrated LED = 🐵 Dimmable = 🛞 Energy Star = 🧮 Reversible Blades = 🕥


Arkwet [∞] Weather+ [∞] 52" 339629 Page 106 ₩ AC	Canfield" Weather+" Motor Assembly 320500 Page 110 WF AC	Kevlar" Weather+" 60" 310150 Page 108	
Lehr" II Weather+" 54" 310112 Page 102	Lehr [∞] Weather+ [∞] 80" 310115 Page 100 ₩+ 00	Surrey Weather+ [™] 60" 300250 Page 104 ₩ €	

Cavelli 25" 300040 Page 114


Eyrie 23" 300041 Page 116

Pola™ 18" 339218 Page 120 ₩ AC Pola[™] 24" 339224 Page 118 ♥ ♠€

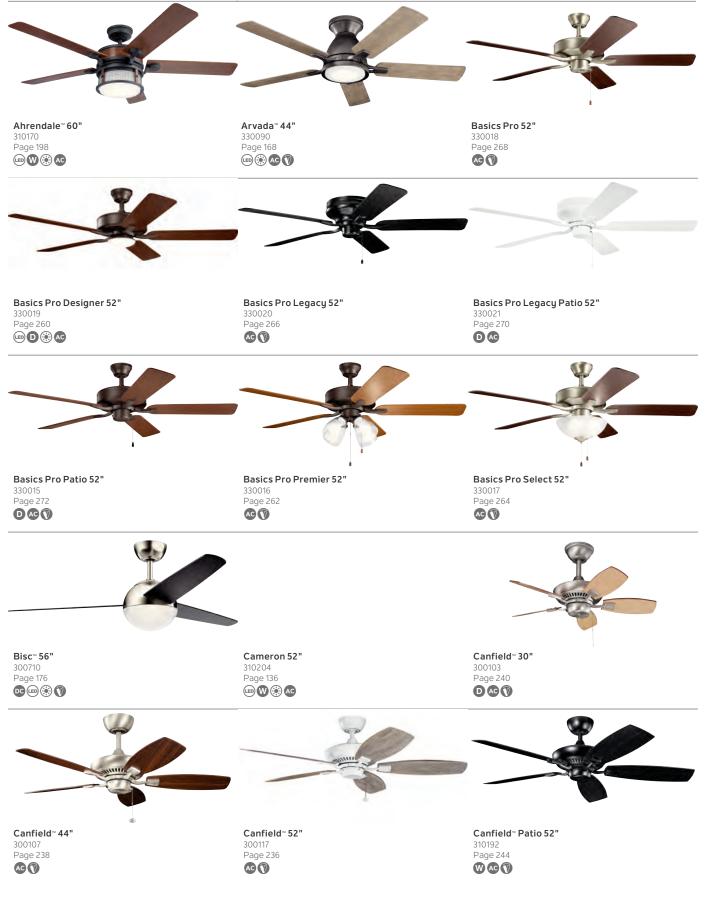


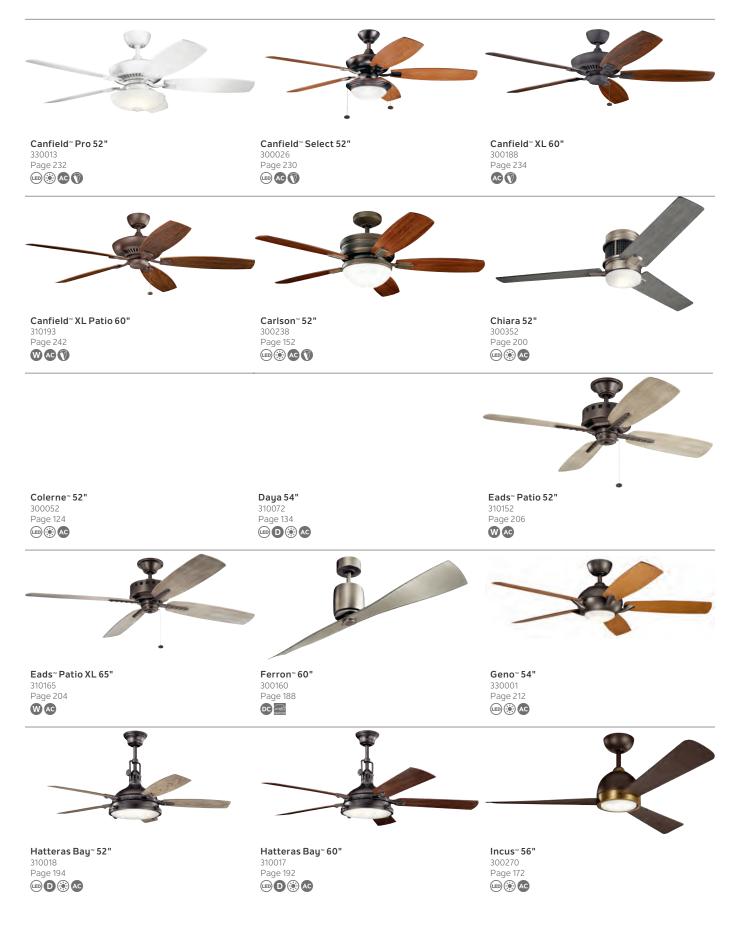



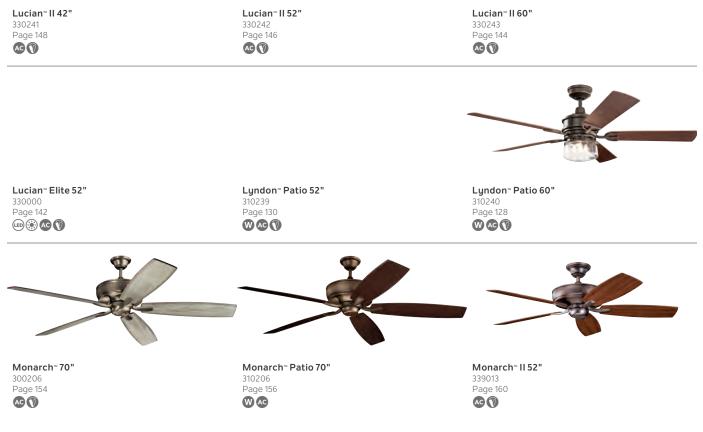



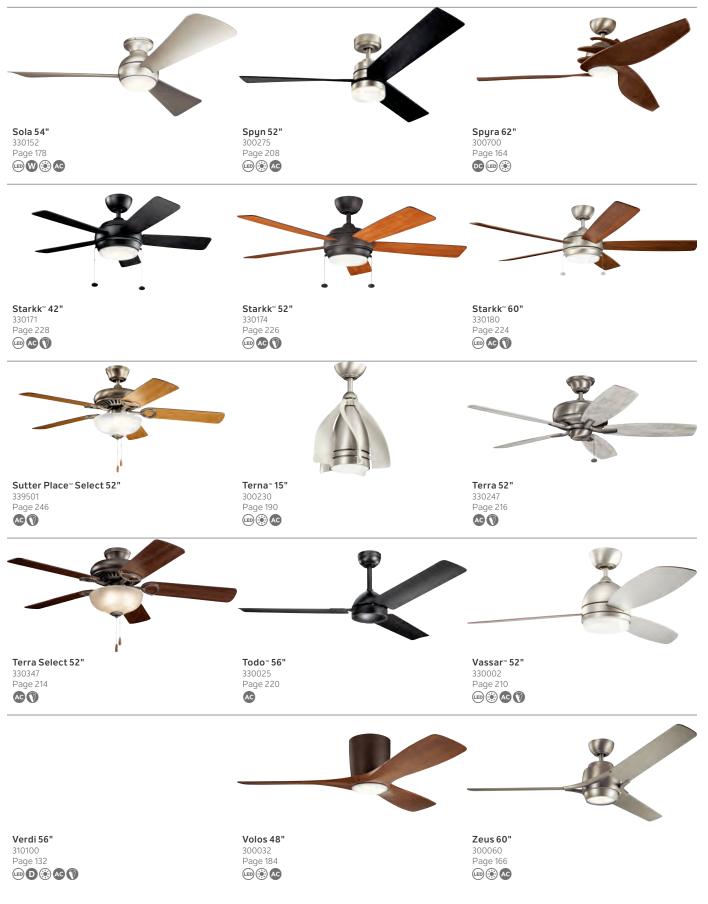

Ceiling Fan

Ceiling fans can take multitasking to a whole new level. As a standalone fan or combined with a light, these beautiful showstoppers liven up living spaces while bringing comfort and style to any room – inside or out.

Benefits of Having a Ceiling Fan:



Helps maintain circulation - ceiling fans help maintain airflow year-round.



Energy Efficiency - LED light sources on fans are up to 90% more efficient than fluorescent or incandescent light sources.



Seasonal benefits – brings comfort to a room no matter the temperature outside.

Circulate Air With The Seasons

When it's hot outside, set the fan to rotate counterclockwise. The blades will push air down – creating a breeze or cooling effect in the room.

In the winter, set the fan to rotate clockwise. The blades will pull the air up and around, moving the warm air that rises to the ceiling back down to the living space.

TIP According to Energy.gov, changing the direction of your fan can help adjust your thermostat up to +4° F when it's hot and -2° F when it's cold out, which can help save on energy costs.







UNDERSTANDING FAN RATINGS AND

Your Space

A ceiling fan is a true multitasker. Stylish focal point, comfortable breeze maker, and beautiful illuminator. With so much functionality, how do you choose the fan that's right for your space? Well, first, consider the rating – depending on if you are installing a ceiling fan inside or outside, the rating will play a big role in your decision.



Indoor Locations

When it comes to indoors, the sky is the limit on which rating type you can select for your home. That's because dry, damp, or wet rated ceiling fans will all work nicely indoors. So, feel free to select from any of our ratings.

Outdoor Locations

Our outdoor ceiling fans are designed to withstand the elements and are classified as: damp, wet or Weather+[™]. Your space and weather conditions will help determine what you need:




A damp rated fixture must be used under cover and not directly exposed to the elements. An example of this would be a covered porch or patio.



A wet rated fixture can be exposed to direct precipitation when installed on structures, such as pergolas, lanais, or open porches.



Weather + is designed to withstand wet rated weather conditions, plus combat the effect of certain environmental factors such as saltwater spray and impact from UV rays.





style

From modern and traditional to art deco and vintage-inspired, we offer ceiling fans in a variety of styles to fit an assortment of spaces and décors. Need some inspiration? Check out the styles below:

Modern – adds a clean, understated touch to open spaces.

Transitional – simple and sophisticated with minimal ornamentation.

Traditional – complements a room with classic, elegant décor.

Industrial – takes cues from machine-aged aesthetics and urban settings.

Vintage – offers an emphasis on characterdefining elements with a touch of nostalgia.


Art Deco – a touch of elegance, art deco embraces symmetry, crisp lines and soft curves.

Minimalist – breaks down a room into necessities, giving everything a purpose.

Coastal – brings the seaside in with natural textures, light woods, and soft colors for a calming, breezy feel.


$\begin{array}{c} \text{selecting the right size} \\ Ceiling Fan \end{array}$

Picking the size of a ceiling fan is easier than you think. Just measure the room, wall to wall for the length and width. Then multiply the length and width together to get the square footage of the room. Once you have this, you will be able to find the blade size that works best for your space.

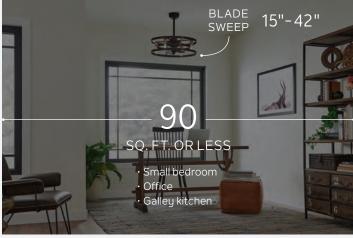




Look for fans with CFM on High: 4500-5500 for maximum cooling

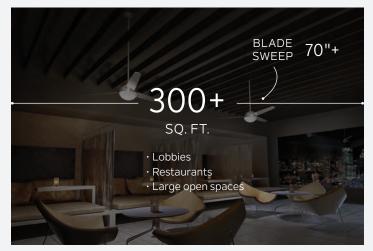

Look for fans with CFM on High: over 10,000 for maximum cooling



Look for fans with CFM on High: 3500-4500 for maximum cooling

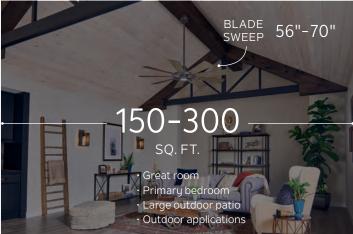

Look for fans with CFM on High: 5500-10,000 for maximum cooling


Special Considerations

- Have a room that's larger than 300 square feet? Consider using multiple smaller fans.
- If your ceiling is higher than 8 or 9-feet, you will likely want a longer downrod (sold separately).
- Residential fans should be installed with a minimum clearance of 7-feet under the blades.
- Industrial-rated fans with high RPMs should be installed with a minimum of 10 feet under the blades.

RPM (revolutions per minute) - the number of times the fan blade makes a complete rotation each minute

Mounting Types

When it comes to ceiling fans there are a couple of different ways to mount the fan. Understanding these options will help you select the right mounting type for your space.

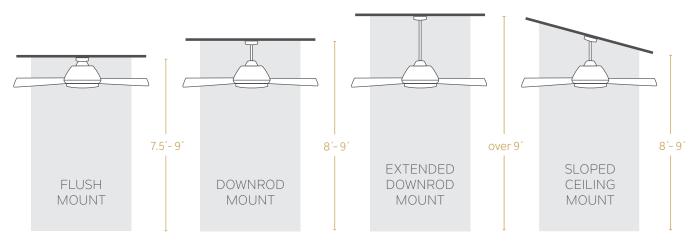

For applications above 30°, utilize our 60° Slope Adapter Kit 337005 on page 280.

Flush Mount

Flush mount or hugger fans do not include a downrod and are mounted flush to the ceiling. Typically, max stem tilt is 0 and does not accommodate a slope adapter. Ideal for low ceilings or small rooms.

Downrod

Fan-specific stem that allows the ceiling fan installation height to be adjusted for optimal performance. This allows for more customization and different ceiling heights, including sloped and high ceilings. Ideal for medium to large room sizes.

Dual Mount

Often considered as being low-ceiling adaptable, these fans include hardware required to be installed either as a flush mount or with a downrod, and offer convenience for various applications.

Airflow Considerations

For Flush Mounts - It is important to keep in mind that flush mount/hugger fans have less air between the ceiling and the blades to pull from, and therefore often have lower CFMs than a fan installed with a downrod/further from the ceiling. For Fans With a Downrod - The use of the initial downrod allows the fixture to hang extended from the ceiling - allowing it to grab the air from above, circulate it and push it down - this is the air flow/ cooling sensation that one would feel.


CFM (cubic feet per minute of recorded airflow) - the higher the reading the more air is moved per minute.

how much is enough Airflow

Ceiling fans are rated by airflow and airflow efficiency. These standardized ratings allow you to compare one fan to another without being an expert on motors and materials. The higher the airflow (cubic feet per minute), the more air the fan moves, and the better the airflow efficiency.



Ceiling Fan Performance Guide

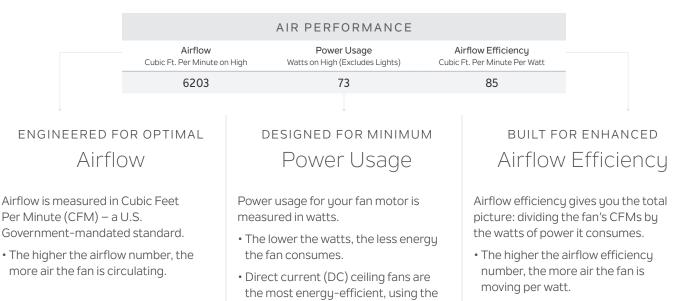

least amount of wattage.

Understanding CFMs

Indoor

When working with extremely tall ceilings, you should consider using the 7ft from the floor guidelines (10ft for high-velocity fans.) If the location requires that the fan hang higher, you should consider using a fan with a higher CFM or using more than one fan to get the desired airflow.

Outdoor

We recommend going up a size in fan width or blade sweep, or higher CFMs, for outdoor locations to combat the outdoor elements that can interfere with the ceiling fan's airflow, such as high winds. Consider using a sloped ceiling kit to stabilize the fan to move naturally with nature and not against it.

CHOOSING A FAN MOTOR:

AC or DC

When selecting a ceiling fan, it is essential to understand the difference between AC and DC motors. AC motor ceiling fans are more common, but a DC motor may better suit your situation and space. For instance, DC motors use up to 70% less electricity than AC versions and are quieter. This might be worth considering if your electric costs are high where you live, and you want to minimize electrical use as much as possible. Additional factors to consider when comparing AC to DC motors:

AC Fan Motor

- AC motor fans are commonly used throughout residential and multi-use applications as they are simple to install, pair to controls, and maintain.
- 3-speeds, forward and reverse for desired comfort.
- Compatible with optional controls (wall or handheld remotes) that can program up to 65,000 codes to help avoid interference from other electronics.
- Can be installed on the same circuit, which saves on time and materials.
- Coordinates with a variety of additional optional accessories, from light kits to sloped kits.

DC Fan Motor

- DC motor fans are lightweight, quieter, and utilize an internal transformer to convert AC input power to DC, resulting in energy efficiency.
- 6-speeds, forward and reverse, to help achieve desired comfort.
- Equipped with a lightweight motor for easier installation.
- Offers energy cost savings as DC motors use up to 70% less energy.
- Comes with a remote to aid in controlling the fan settings from a distance.

Commercial Installations

- AC motors are preferred given their controls and ability to install on the same circuit.
- DC motors can only install 2 per circuit and are not recommended for multiple fan applications.

Illumination

If you want to lighten up your space while making comfort a breeze, choose a fan with a light or add a light kit. Here are some tips to help you get started.

Integrated LED

What does integrated LED mean?

When it comes to fans, the phrase integrated LED means there is a lighting module featuring an array of LED diodes built into the body of the fan – so there is no need to purchase, add or replace bulbs. These all-in-one fixtures offer ambient light plus the comfort and style of a fan.

LED Light Kit

We're big fans of lighting. That's why we offer two ways to purchase an LED-enabled fixture, in addition to 'integrated'. You can either purchase a complete fan that has an LED light kit included, or select a ceiling fan that is compatible with LED light kits.

Included LED Light Kit

Many of our fans come with a light kit in the form of a bowl light or fitter that hangs down from the fan. When the light kit is included, it also includes LED light bulbs.

Light Kit Accessory

Select fans within our line are compatible with an optional light kit. This would be an accessory purchased separately to add light while adding to the design of the fan.

Dimmability

Depending on your need for the space, the light output you need can vary. If you're having a cozy night in, you may need less light, while activities like family game night or homework time may need more. This is why dimmability is so important. All of our LED fans with a wall control or handheld remote are dimmable, allowing you to find the ideal light for every occasion.

So, how many lumens do you need? Knowing the size of your room will help determine how many lumens you'll need. Below are general guidelines to help you gauge.

Workspace or garage	
Kitchen or work area	
Home office	6,000 to 8,000 lumens
Dining room	
Kitchen table	
Living room	1,000 to 2,000 lumens
Bedroom	1,000 to 2,000 lumens

A Little Bit About Lumens

When looking at an LED light, you will see the light output measured in lumens. But what exactly is a lumen? And what exactly is a watt?

Lumens measures the light output. The higher the lumens, the more light that is emitted.

Watts is the measure of energy required to light the product. The lower the wattage, the less energy consumed.

Lumens Per Watt/Efficacy is the measure of efficiency. The higher the lumen per watts, the more efficient the product is. The majority of our ceiling fans have around 1,600 lumen output. We also offer a select number of fans that have around 2,200 lumen output.

FAN LUMENS – 1600 lm		FAN LUMENS – 2200 lm	
1000 lm	2500 lm	1000 Im	2500 lm

To achieve maximum room lighting potential, consider light layering with downlights or LED tape lights.

It's important to note these are general guidelines and your room might require more lumens. For instance, if your room has darker walls and high ceilings, you may need additional lumens for desired illumination.

Control Options

We offer three types of ceiling fan control options to meet your needs and room environment, these include:





Pull Chain - built into the switch housing, these ceiling fans are easy to operate – with just a pull of the chain you can adjust the speed and turn the light on and off.

Wall Control - connects to the room's wall switch box and offers the ability to adjust the fan's speed, dimming capabilities, and full-function models can even reverse the direction of the fan rotation (blade reversal).

Handheld Remote - offering more mobility, you can place this remote throughout the room or on the wall. Battery operated, this remote offers the ability to adjust the fan's speed, dimming capabilities, and rotation direction.

Wall and handheld controls that come with our fans are white. We offer a variety of optional finish accessories to fit your style and decor.

Vinea

Geometry and symmetry come to life in the Vinea collection. A refined, sophisticated fan inspired by art deco's familiar motifs, Vinea does more than elevate a space — it transforms it.

Shown: 300345BNB Brushed Natural Brass Finish, Etched Cased Opal Glass, with Black or Walnut Blades



300345BSS

Brushed Stainless Steel Finish Black or Walnut Blades Etched Cased Opal Glass 300345SBK

Satin Black Finish Black or Walnut Blades Etched Cased Opal Glass

				52" Vinea	INDOOR
	PRO	DDUCT FEATUR	ES	BLADE SPECS	OOR
LED	Integrated LED	AC Motor		Blade Finish & Part Number Fan Motor Finish (Side 1) (Reversible)	
	Dimmable	Reversible Blades	5		DRY LO
	INCLUDED FEATURE	S IN	ICLUDED CONTROLS		DRY LOCATIONS
- 1 - 5 - F Dow Dow - 2	des (5) Included 3° Pitch 32" Sweep Reversible Plywood vnrods 4.5" Downrod with 1" (C vnlight Integrated LED (1) 23W 2200 Source Lumens 30 C RI		65K CoolTouch™ Control System – Full Function - 3 Forward Speeds, Reverse & Motor Off - Light On/Off with Full Range Dimming PTIONAL CONTROLS	BSS Brushed Stainless Steel	NEV
- 3 Dow Opt	vnlight Glass Etched Cased Op ional LED Light Kits N/A v Ceiling Adaptable No		65K Wall Transmitter – Full Function 371065 (Shown)		
	FAN FEATURES				
Lead cET Han Bod War Mot	unting Slope – Pitch 22° d Wire 78" Lus Listed Dry Iging Weight 25.7 lbs. ly Material Steel ranty Limited Lifetime MOTOR FEATURES for Size/Type 172mm X 20mm, os 0.6 on High I 144 on High	AC Ciona 551	Chandelier Ciona [™] Vanity 55112PN 55112PN		
	HANGI	NG MEASUREN	IENTS		
	with 4.5	5" Downrod			
A		17.5"			
B C	Blade Drop from Ceiling Housing (Width)	9.6" 7.9"			
D	Ceiling Canopy (Width)	5.9" R PERFORMAN	Fixture Drop (A) includes light kit		
	Airflow	Power Usage latts on High (Excludes Lights	Airflow Efficiency		
	5002	71.6	60		

lcon

Clean shapes, stepped cutlines, and soft curves draw you into the Icon collection. Drawing inspiration from the classic details of an art deco silver serving set, this collection is true to its name — more than a ceiling fan, it's an icon. Shown: 300395SBK Satin Black Finish, Etched Cased Opal Glass, with Black Blades




300395WH

White Finish White Blades Etched Cased Opal Glass

BLADE SPECS

Fan Motor Finish (Reversible)

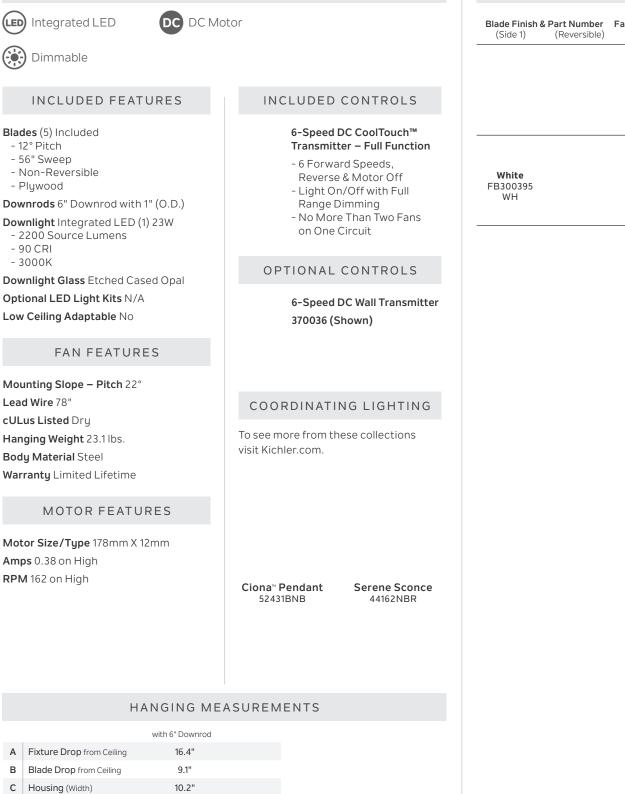

Fixture Drop (A) includes light kit

Airflow Efficiency

Cubic Ft. Per Minute Per Watt

228

PRODUCT FEATURES

Ceiling Canopy (Width)

Airflow

Cubic Ft. Per Minute on High

6069

D

6.3"

AIR PERFORMANCE

Power Usage

Watts on High (Excludes Lights)

26.6

wн White

Brahm™

The Brahm ceiling fan collection is the ultimate extrovert, comfortable in various design trends. By choosing your finish, you choose your match. Its style mimics the column of a traditional wooden table, and it easily becomes the heart of any room.




Shown: 300044BSS Brushed Stainless Steel Finish, Etched Cased Opal Glass, with Silver or Walnut Blades







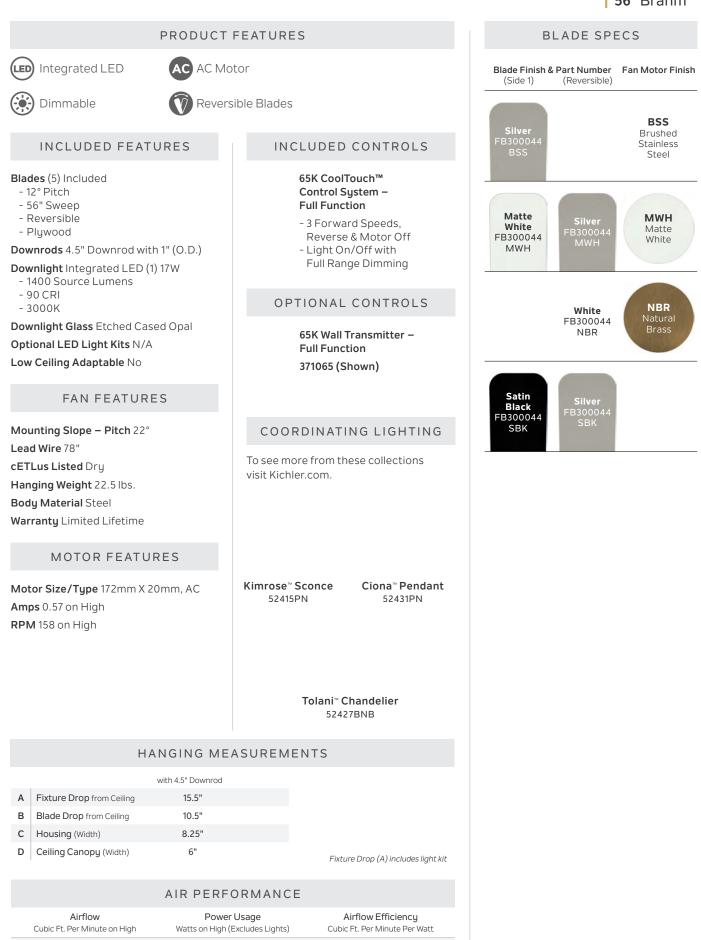



Rise

Ornate, luxurious, and classic, the Rise collection will change how you view ceiling fans. Inspired by an artisanal wallpaper design, this collection features curves and detailing in all the right ways.

Designed to complement **TRADITIONAL**




Shown: **3003700Z** Olde Bronze® with Gold Highlights Finish, Etched Cased Opal Glass, with Walnut or Cherry Blades





INDOOR

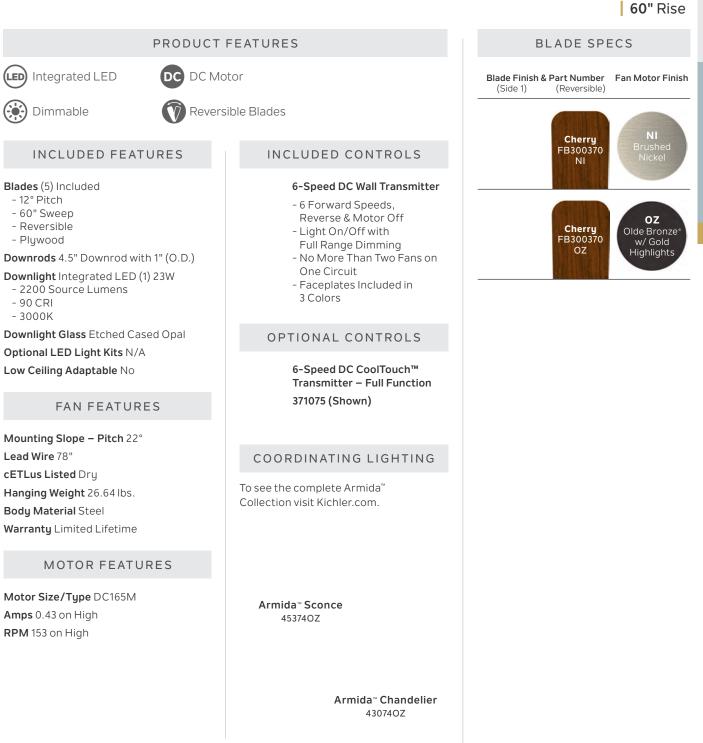

HANGING MEASUREMENTS

		with 4.5" Downrod
А	Fixture Drop from Ceiling	16.8"
В	Blade Drop from Ceiling	8.7"
С	Housing (Width)	14.2"
D	Ceiling Canopy (Width)	7.7"

AIR PERFORMANCE

Airflow	Power Usage	Airflow Efficiency
Cubic Ft. Per Minute on High	Watts on High (Excludes Lights)	Cubic Ft. Per Minute Per Watt
6419	31	209


Crescent

Redefining the traditional, the Crescent collection features proud silhouettes and ornate decorative details. Inspired by an antique Greek Calyx Krater vessel, Crescent comforts you with a grace all its own.

Designed to complement **TRADITIONAL**



Shown: **3003250Z** Olde Bronze[®] with Gold Highlights Finish, Etched Cased Opal Glass, with Walnut or Cherry Blades



300325NI

Brushed Nickel Finish Walnut or Cherry Blades Etched Cased Opal Glass



PRODUCT	FEATURES	BLADE SPECS
LED Integrated LED AC AC Mo	otor	Blade Finish & Part Number Fan Motor Finish
Dimmable Reverse	sible Blades	(Side 1) (Reversible)
INCLUDED FEATURES	INCLUDED CONTROLS	Cherry FB300325 NI Nickel
Blades (5) Included - 12° Pitch - 56" Sweep - Reversible - Plywood Downrods 4.5" Downrod with 1" (O.D.) Downlight Integrated LED (1) 23W - 2200 Source Lumens - 90 CRI - 3000K Downlight Glass Etched Cased Opal Optional LED Light Kits N/A Low Ceiling Adaptable No	65K CoolTouch [™] Control System – Full Function - 3 Forward Speeds, Reverse & Motor Off - Light On/Off with Full Range Dimming OPTIONAL CONTROLS 65K Wall Transmitter – Full Function 371065 (Shown)	Cherry FB300325 OZ Ude Bronze W/ Gold Highlights
FAN FEATURES Mounting Slope – Pitch 22° Lead Wire 78" cETLus Listed Dry Hanging Weight 28 lbs. Body Material Plastic Warranty Limited Lifetime	COORDINATING LIGHTING To see more from these collections visit Kichler.com.	
MOTOR FEATURES Motor Size/Type 172mm X 20mm, AC Amps 0.6 on High RPM 139 on High	Cassadee Mona Sconce Chandelier 43375CLP 52116BNB	
HANGING ME	ASUREMENTS	
A Fixture Drop from Ceiling 16"		
B Blade Drop from Ceiling 9.8" C Housing (Width) 11.8"		
D Ceiling Canopy (Width) 5.9"	Fixture Drop (A) includes light kit	
Airflow Power	ORMANCE Usage Airflow Efficiency	
	Excludes Lights) Cubic Ft. Per Minute Per Watt 2 72	
5145	L 12	



Humble


Traditional forms create a cozy vibe in the Humble collection. With blade irons inspired by organic scrollwork and wire frame details, Humble allows you to relax comfortably and enjoy the simple touches of being home.



Shown: 300415CHZ Character Bronze Finish, Etched Cased Opal Glass, with Black Blades





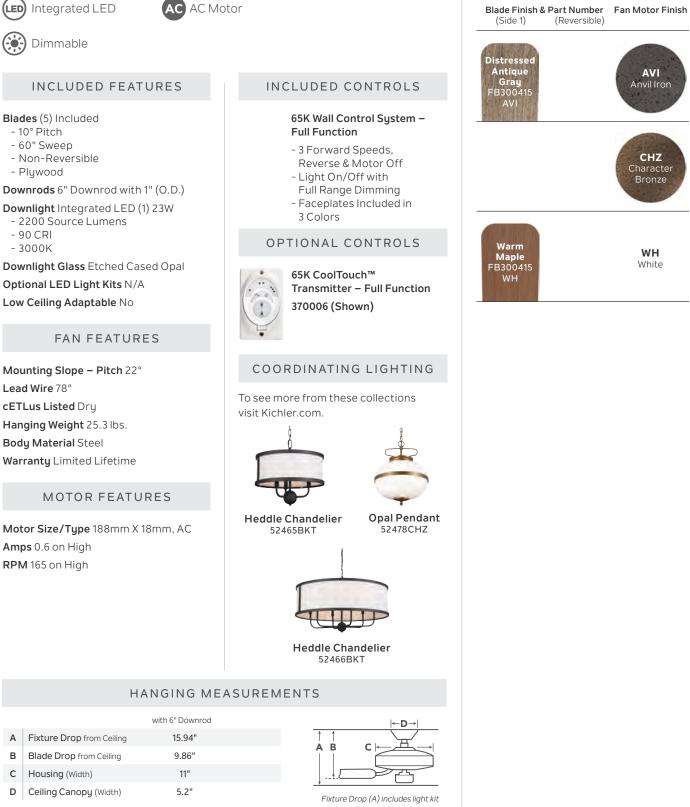

	AIR PERFORMANCE		
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt	
5786	71	81	

PRODUCT FEATURES

- 90 CRI

- 3000K

A

в

С

D



Tide

The Tide collection brings together hints of ornamental details, inspired the traditional architectural corbel, to create updated fixtures epitomizing refined elegance.

Designed to complement
UPDATED TRADITIONAL



Shown: **310075OZ** Olde Bronze[®] Finish, Etched Cased Opal Glass, with Weathered Medium Oak Blades





310075NI Brushed Nickel Finish Silver Blades Etched Cased Opal Glass 310075SBK Satin Black Finish Black Blades Etched Cased Opal Glass




White Finish White Blades Etched Cased Opal Glass

52" Tide





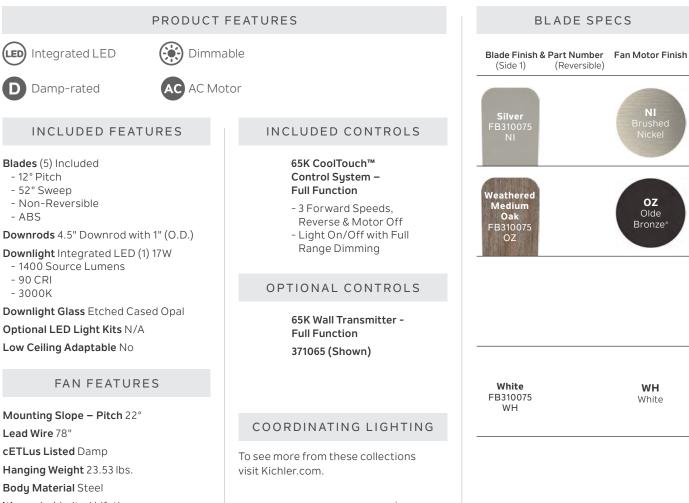



Joelson[™] Sconce 459210Z

Everly[™] Sconce 42046NICS

> Weather+[™] model of the Tide Collection is also available for wet-rated and coastal applications. See page 96 for more details.

HANGING MEASUREMENTS

		with 4.5" Downrod
А	Fixture Drop from Ceiling	13.9"
в	Blade Drop from Ceiling	8.8"
С	Housing (Width)	9.1"
D	Ceiling Canopy (Width)	5.9"

(LED)

Integrated LED

Damp-rated

Blades (5) Included

- Non-Reversible

- 1400 Source Lumens

Low Ceiling Adaptable No

Hanging Weight 23.53 lbs.

MOTOR FEATURES

Motor Size/Type 153mm X 20mm, AC

Body Material Steel Warranty Limited Lifetime

Amps 0.48 on High RPM 142 on High

- 12° Pitch


- ABS

- 90 CRI

- 3000K

Lead Wire 78" cETLus Listed Damp

- 52" Sweep



Fixture Drop (A) includes light kit

AIR PERFORMANCE		
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
5091	57	89



Tranquil

Fine graduated lines and rich finishes make the Tranquil collection stand out. It's casual yet elegant — just like you.

Designed to complement
UPDATED TRADITIONAL

Tranquil 310080SBK Satin Black Finish, Etched Cased Opal Glass, with Black Blades | Page 54

Shown: **3100800Z** Olde Bronze[®] Finish, Etched Cased Opal Glass, with Weathered Medium Oak Blades


56" Tranquil

310080NI Brushed Nickel Finish Silver Blades Etched Cased Opal Glass 310080SBK

Satin Black Finish Black Blades Etched Cased Opal Glass

310080WH

White Finish White Blades Etched Cased Opal Glass

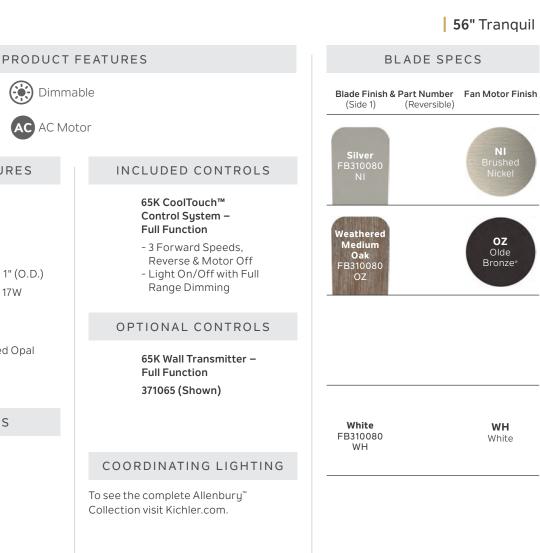

To see the complete Allenbury[™] Collection visit Kichler.com.



Allenbury[™] Wall Light 49981BKT

Weather+[™] model of the Tranguil Collection is also available for wet-rated and coastal applications. See page 98 for more details.

HANGING MEASUREMENTS

		with 4.5" Downrod
А	Fixture Drop from Ceiling	14.3"
в	Blade Drop from Ceiling	10"
С	Housing (Width)	9.6"
D	Ceiling Canopy (Width)	5.9"

AIR PERFORMANCE

Airflow Power Usage Cubic Ft. Per Minute on High Watts on High (Excludes Lights)

71

Airflow Efficiency Cubic Ft. Per Minute Per Watt 86

6102

LED)

Integrated LED

INCLUDED FEATURES

Downrods 4.5" Downrod with 1" (O.D.)

Downlight Integrated LED (1) 17W - 1400 Source Lumens

Downlight Glass Etched Cased Opal

FAN FEATURES

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC

Optional LED Light Kits N/A

Low Ceiling Adaptable No

Mounting Slope - Pitch 22°

Hanging Weight 25 lbs.

Body Material Steel Warranty Limited Lifetime

Amps 0.59 on High

RPM 137 on High

Damp-rated

Blades (5) Included

- Non-Reversible

- 12° Pitch

- ABS

- 90 CRI

- 3000K

Lead Wire 78" cETLus Listed Damp

- 56" Sweep

Dimmable

AC Motor

Kichler.com 55

COVERED OUTDOOR

Gentry

Massive in scale and size, Gentry knows how to make an impact – both visually and with airflow. Its blade design creates a stunning visual effect on or off. Your choice of finish combinations provides styles that fit with modern, classic, or rustic settings.

Designed to complement **LODGE**




Shown: 300285AVI Anvil Iron Finish, Etched Cased Opal Glass, with Distressed Antique Gray or Walnut Blades









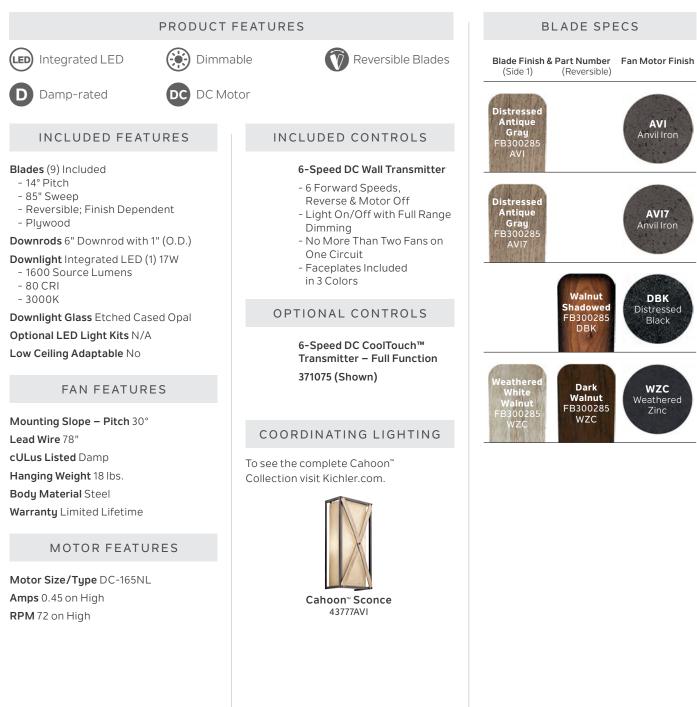

HANGING MEASUREMENTS

		with 6" Downrod
А	Fixture Drop from Ceiling	16.5"
в	Blade Drop from Ceiling	14"
С	Housing (Width)	7"
D	Ceiling Canopy (Width)	6"





Fixture Drop (A) includes light kit

AIR PERFORMANCE		
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
9058	31	283



Shown:

300265AVI Anvil Iron Finish, Etched Cased Opal Glass, with Distressed Antique Gray or Walnut Blades


65" Gentry



300265DBK Distressed Black Finish Walnut or Walnut Shadowed Blades Etched Cased Opal Glass 300265WZC Weathered Zinc Finish Weathered White Walnut or Walnut Blades Etched Cased Opal Glass



300265AVI7 Anvil Iron Finish Distressed Antique Gray Blades Etched Cased Opal Glass

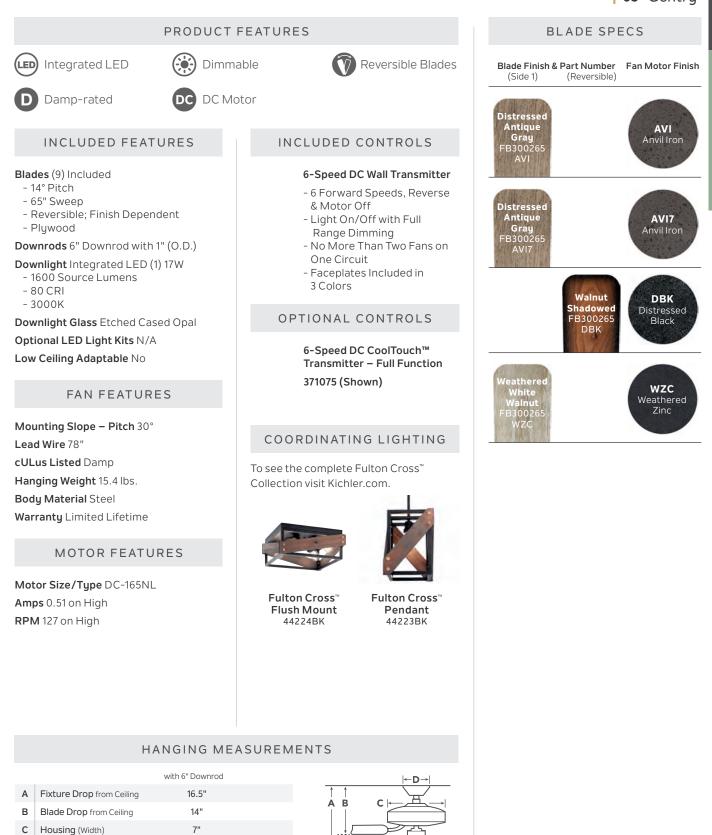

Ceiling Canopy (Width) D



Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
7950	38	209

Kichler.com 61




Shown:

300241AVI Anvil Iron Finish, Etched Cased Opal Glass, with Distressed Antique Gray or Walnut Blades







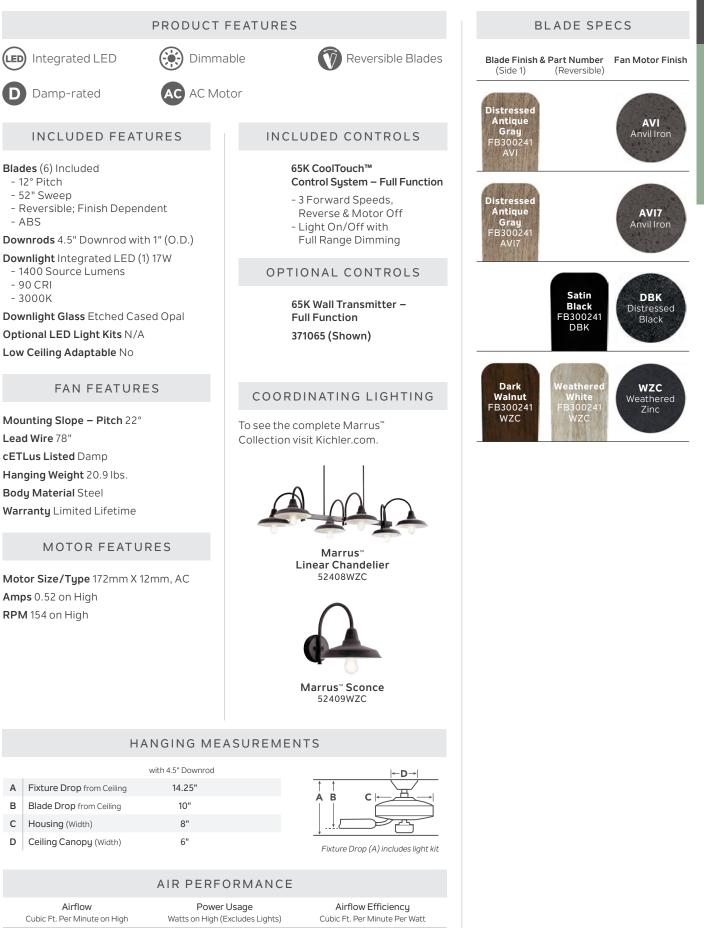

75

4678

62

Kichler.com 63

Szeplo™ Patio

Inspired by industrial machinery, extruded Aluminum blades are held by geometrically designed arm irons. Dimmable LED light adds perfect illumination to any room.

Designed to complement **INDUSTRIAL**





Shown:

 $3003010Z\,$ Olde Bronze* Finish, Etched Cased Opal Glass, with Olde Bronze* Blades

80" Szeplo™ Patio



300301WSP Weathered Steel Powder Coat Finish Weathered Steel Blades Etched Cased Opal Glass

300301SBK Satin Black Finish

Satin Black Blades Etched Cased Opal Glass



BLADE SPECS





OUTDOOR

Wet-rated INCLUDED FEATURES Blades (6) Included - 13° Pitch - 80" Sweep - Non-Reversible - Aluminum **Downrods** 6" Downrod with 1" (O.D.) Downlight Integrated LED (1) 17W - 1600 Source Lumens - 80 CRI - 3000K Downlight Glass Etched Cased Opal Optional LED Light Kits N/A Low Ceiling Adaptable No

(LED)

Integrated LED

FAN FEATURES

Mounting Slope – Pitch 30° Lead Wire 78" cETLus Listed Wet Hanging Weight 32.2 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC-165L Amps 0.52 on High RPM 91 on High

Dimmable

PRODUCT FEATURES

DC Motor DC

INCLUDED CONTROLS

6-Speed DC CoolTouch™ Transmitter – Full Function

- 6 Forward Speeds,
- Reverse & Motor Off
- Light On/Off with Full Range Dimming
- No More Than Two Fans on One Circuit

OPTIONAL CONTROLS

6-Speed DC Wall Transmitter 370036 (Shown)

Satin Black FB300301 SBK WSP Weathered Steel FB300301 Weathered teel Powd Coa WSP

METAL CAPS


Includes a metal fixture cap for non-light use.





HANGING MEASUREMENTS


		with 6" Downrod
А	Fixture Drop from Ceiling	16.25"
в	Blade Drop from Ceiling	14"
С	Housing (Width)	8.75"
D	Ceiling Canopy (Width)	6.75"



Fixture Drop (A) includes light kit

AIR PERFORMANCE		
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
9890	35	282

Shown: **3003000Z** Olde Bronze[®] Finish, Etched Cased Opal Glass, with Olde Bronze[®] Blades

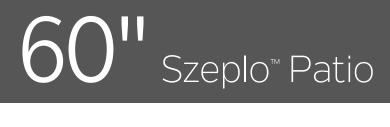







(Reversible)

Blade Finish & Part Number

(Side 1)

Olde

Bronze®

FB300300 OZ

Satin Black FB300300

SBK

Weathered

Steel

FB300300

WSP





PRODUCT FEATURES (LED) Integrated LED Dimmable Wet-rated DC Motor DC INCLUDED FEATURES INCLUDED CONTROLS Blades (6) Included 6-Speed DC CoolTouch™ - 13° Pitch Transmitter – Full Function - 60" Sweep - 6 Forward Speeds, - Non-Reversible Reverse & Motor Off - Aluminum - Light On/Off with **Downrods** 6" Downrod with 1" (O.D.) Full Range Dimming - No More Than Two Fans Downlight Integrated LED (1) 17W on One Circuit - 1600 Source Lumens - 80 CRI - 3000K OPTIONAL CONTROLS Downlight Glass Etched Cased Opal Optional LED Light Kits N/A 6-Speed DC Wall Transmitter Low Ceiling Adaptable No 370036 (Shown) FAN FEATURES Mounting Slope – Pitch 30° COORDINATING LIGHTING Lead Wire 78" cETLus Listed Wet To see the complete Hanging Weight 28.4 lbs. Elias Collection visit Kichler.com. Body Material Steel Warranty Limited Lifetime **Elias Pendant** 52096BK MOTOR FEATURES METAL CAPS Motor Size/Type DC-165M Amps 0.5 on High Includes a metal fixture cap for non-light use. RPM 140 on High

HANGING MEASUREMENTS

		with 6" Downrod	←D→
Α	Fixture Drop from Ceiling	16.25"	
в	Blade Drop from Ceiling	14"	
с	Housing (Width)	8.75"	
D	Ceiling Canopy (Width)	6.75"	Fixture Drop (A) includes light

AIR PERFORMANCE				
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt		
7308	32	225		

Lydra™

The Lydra collection twists and turns - curving where you least expect it. Its beautiful design pulls vintage and contemporary together for a unique look all its own.

Designed to complement **COASTAL**



Shown: 310073DBK Distressed Black Finish, Clear Seeded Glass, with Walnut or Satin Black Blades






DBK

Black

οz

BLADE SPECS



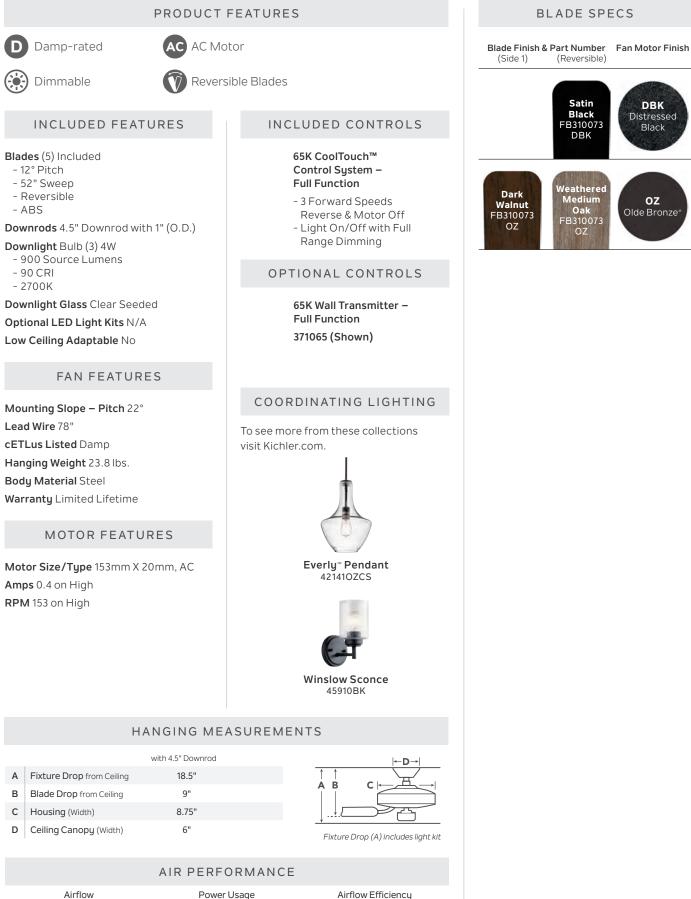

Airflow

Cubic Ft. Per Minute on High

4479

Power Usage

Watts on High (Excludes Lights)

48

Cubic Ft. Per Minute Per Watt

93

Guardian

Inspired by old factory ceiling fans, the Guardian collection exudes modern simplicity. Guardian's knurled details and classic finishes keep history alive and on trend.

Designed to complement **INDUSTRIAL**

Guardian 330057SBK Satin Black Finish, Etched Cased Opal Glass, with Natural Brass Blades | Page 76



330057SBK Satin Black Finish, Etched Cased Opal Glass, with Natural Brass Blades

56" Guardian




White Finish Silver Blades Etched Cased Opal Glass 330057BSS Brushed Stainless Steel Finish Black Blades Etched Cased Opal Glass

56" Guardian

BLADE SPECS

Fan Motor Finish (Reversible)

INDOOR

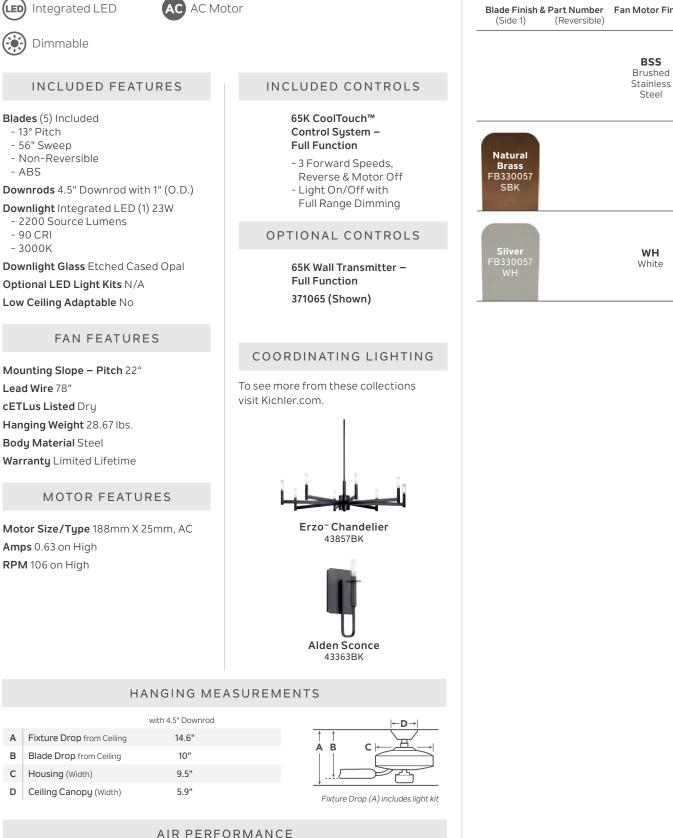

Airflow Efficiency

Cubic Ft. Per Minute Per Watt

72

Airflow

Cubic Ft. Per Minute on High

5400

Power Usage

Watts on High (Excludes Lights)

75

PRODUCT FEATURES



Salvo

At the heart of the Salvo collection is the warehouse-inspired aesthetic of modern industrial. Sleek lines, clean curves and a hint of detail make Salvo a must-have.

Designed to complement **INDUSTRIAL**




Shown: **3300455BK** Satin Black Finish, Etched Cased Opal Glass, with Black Blades





56" Salvo

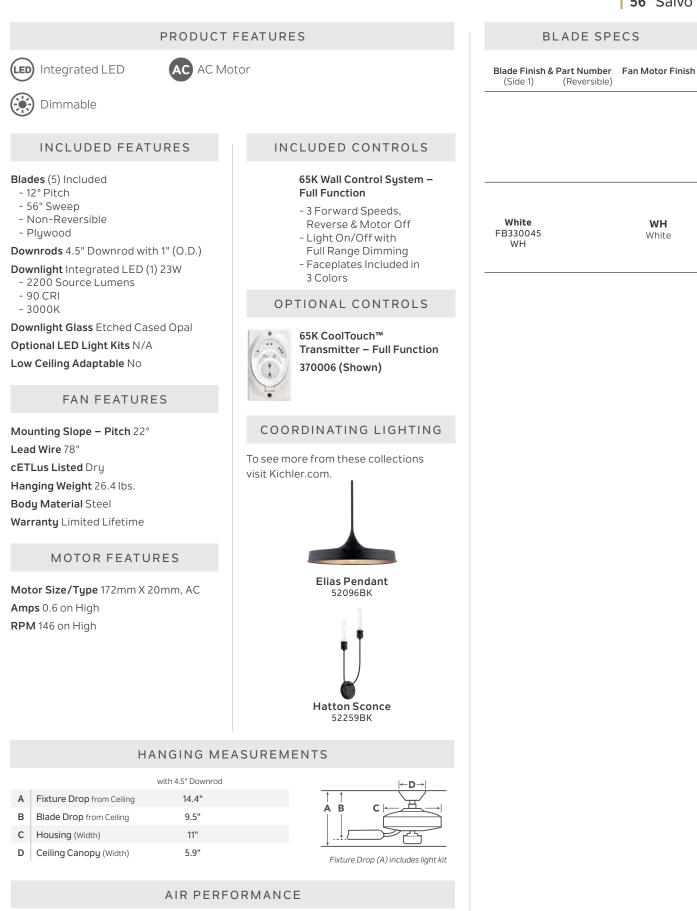

 Airflow
 Power Usage
 Airflow Efficiency

 Cubic Ft. Per Minute on High
 Watts on High (Excludes Lights)
 Cubic Ft. Per Minute Per Watt

 5327
 71
 75

INDOOR

Maeve

The Maeve collection perfectly blends classic and contemporary to produce true elegance. Following European design trends, there's a gap between the body and the light. Subtle, contemporary, and clean minimalism make Maeve a welcome guest.

Designed to complement **SCANDINAVIAN**




Shown: 300059BSS Brushed Stainless Steel Finish, Etched Cased Opal Glass, with Silver Blades





300059MWH Matte White Finish Matte White or Silver Blades Etched Cased Opal Glass 3000595BK Satin Black Finish Satin Black or Silver Blades Etched Cased Opal Glass

INDOOR

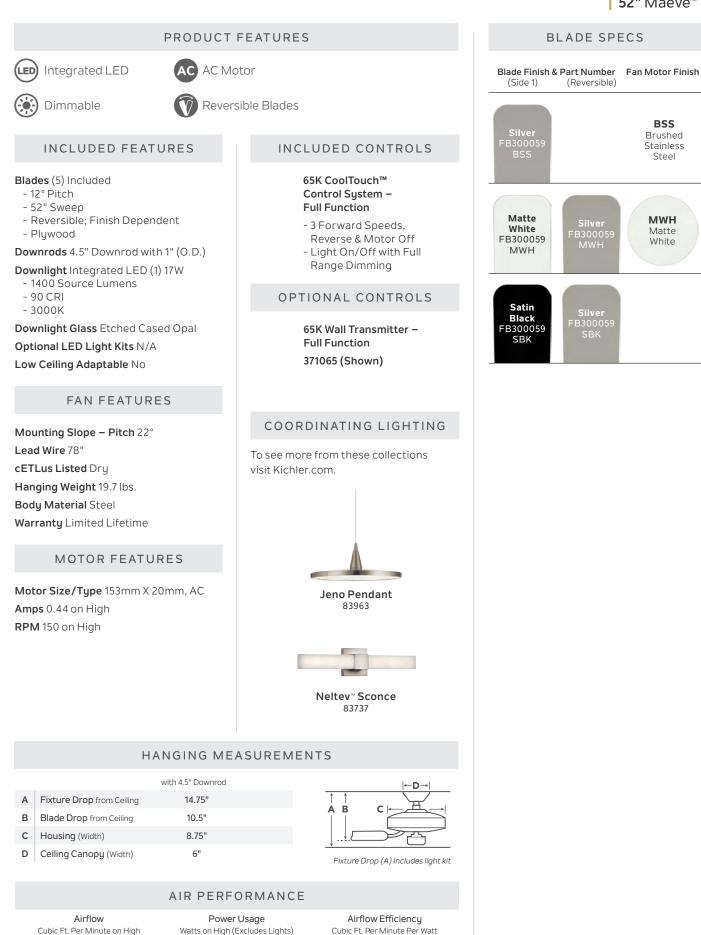

83

4335

52

Kichler.com 85



Imari

With a 65-inch blade span, Imari offers airflow to fit the occasion. The propeller-inspired single-mold three-blade design creates a clean, sophisticated look. The LED light source delivers 2,200 lumens of output – about the equivalent of two 150-watt incandescent lightbulbs – for a substantial amount of room-filling ambient light.

Designed to complement **CONTEMPORARY**



Shown: **300365MWH** Matte White Finish, White Polycarbonate Lens, with Light Oak Blades









PRODUCT FEATURES BLADE SPECS (LED) Integrated LED Dimmable Blade Finish & Part Number Fan Motor Finish (Side 1) (Reversible) Damp-rated DC Motor DC MWH Light Oak Matte FB300365 INCLUDED FEATURES INCLUDED CONTROLS White MWH Blades (3) Included 6-Speed DC Wall Transmitter - 14° Pitch - 6 Forward Speeds, - 65" Sweep Reverse & Motor Off - Non-Reversible PN - Light On/Off with Full Polished - ABS Range Dimming Nickel **Downrods** 6" Downrod with 1" (O.D.) - No More Than Two Fans on One Circuit Downlight Integrated LED (1) 23W - Faceplates Included in - 2200 Source Lumens 3 Colors - 90 CRI /eathered White - 3000K Downlight Glass White Polycarbonate OPTIONAL CONTROLS Optional LED Light Kits N/A 6-Speed DC CoolTouch™ Low Ceiling Adaptable No Transmitter – Full Function 371075 (Shown) FAN FEATURES Mounting Slope – Pitch 30° Lead Wire 78" Listed Damp Hanging Weight 26.4 lbs. Body Material Steel Warranty Limited Lifetime MOTOR FEATURES Motor Size/Type DC-188 Amps 0.44 on High RPM 126 on High HANGING MEASUREMENTS wnrod

		with 6" Down
А	Fixture Drop from Ceiling	14.5"
в	Blade Drop from Ceiling	11.75"
С	Housing (Width)	10"
D	Ceiling Canopy (Width)	6.25"



Watts on High (Excludes Lights)

Airflow Efficiency Cubic Ft. Per Minute Per Watt 282

Fixture Drop (A) includes light kit

С

A B

9548

Airflow

Cubic Ft. Per Minute on High

Ried

Get a wood-blade look in a style that works in damp spaces, like an enclosed patio or sunroom. Ried combines unique wood tones with rustic-inspired finishes for a fan that delivers on the emerging modern industrial trend.

Designed to complement **INDUSTRIAL**



Shown: 300356AVI Anvil Iron Finish with Driftwood Blades





BLADE SPECS





PRODUCT FEATURES

D Damp-rated

INCLUDED FEATURES

Blades (3) Included

- 14° Pitch
- 56" Sweep
- Non-Reversible
- ABS

Downrods 6" Downrod with 1" (O.D.)

Optional LED Light Kits Reid LED Light Kit 380356

Low Ceiling Adaptable No

FAN FEATURES

Mounting Slope – Pitch 22° Lead Wire 78" cULus Listed Damp Hanging Weight 17.63 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 12mm, AC Amps 0.51 on High RPM 156 on High

INCLUDED CONTROLS

65K Wall Control System – Limited Function



- 3 Forwards Speeds & Motor Off

- Manual Reverse - Light On/Off with Full Range Dimming

OPTIONAL CONTROLS



65K CoolTouch™ Transmitter – Limited Function 370005 (Shown)

OPTIONAL LED DOWNLIGHT



Ried LED Light Kit 380356 AVI, NI (shown), OZ Etched Cased Opal Glass, 17W Integrated LED Platform, 1,600 Im, 80 CRI, 3,000K 6.50" Dia. x 2.75" H

COORDINATED LIGHTING

To see the complete Crosby Collection visit Kichler.com.



HANGING MEASUREMENTS

		with 6" Downrod
А	Fixture Drop from Ceiling	14.25"
в	Blade Drop from Ceiling	13.5"
С	Housing (Width)	8"
D	Ceiling Canopy (Width)	6"

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
5260	61	86



DAMP LOC.

COVERED OUTDOOR






Weather+[™] Fans

For coastal environments.

Designed to withstand wet-rated weather conditions and combat the effect of certain environmental factors such as sun, rain, and saltwater spray. Weather+[™] ceiling fans are low-corrosion and UV fade-resistant, making these fans ideal for coastal areas.

Shown: **3101260Z** Olde Bronze[®] Finish, Etched Cased Opal Glass, with Weathered Medium Oak Blades



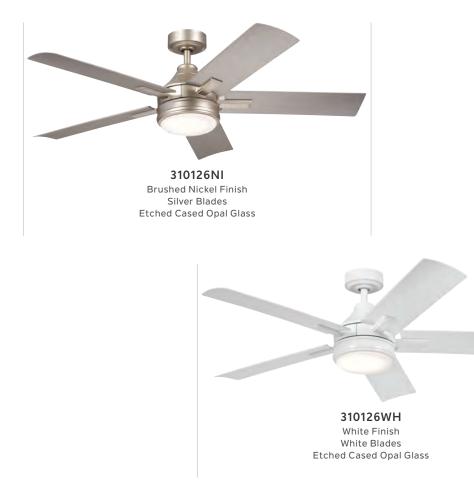

310126SBK


Satin Black Finish

Black Blades


Etched Cased Opal Glass



WEATHER+

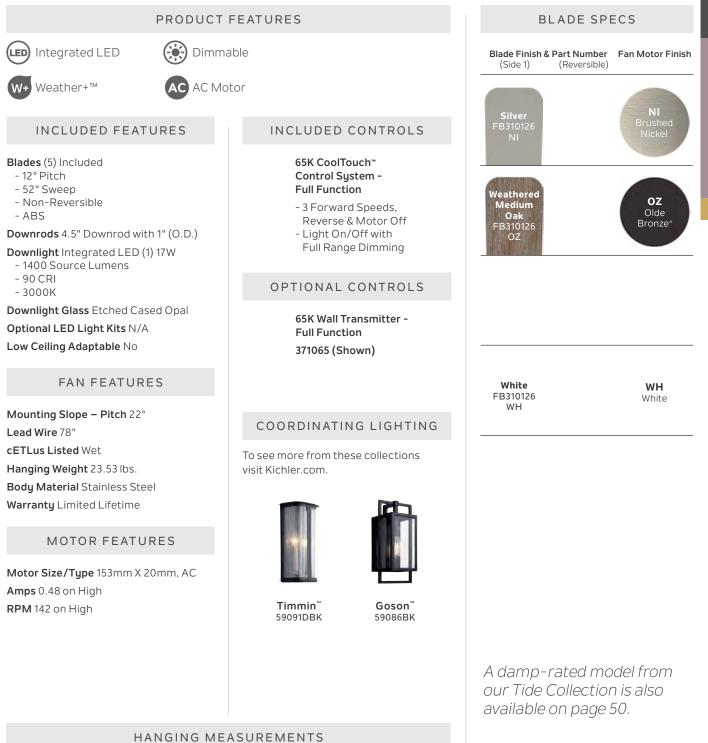

		with 4.5" Downrod
А	Fixture Drop from Ceiling	13.9"
в	Blade Drop from Ceiling	8.8"
С	Housing (Width)	9.1"
D	Ceiling Canopy (Width)	5.9"



AIR PERFORMANCE		
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
5091	57	89

Shown: **3101300Z** Olde Bronze[®] Finish, Etched Cased Opal Glass, with Weathered Medium Oak Blades

310130NI Brushed Nickel Finish Silver Blades Etched Cased Opal Glass 310130SBK

Satin Black Finish Black Blades Etched Cased Opal Glass


310130WH

White Finish White Blades Etched Cased Opal Glass



BLADE SPECS

WEATHER

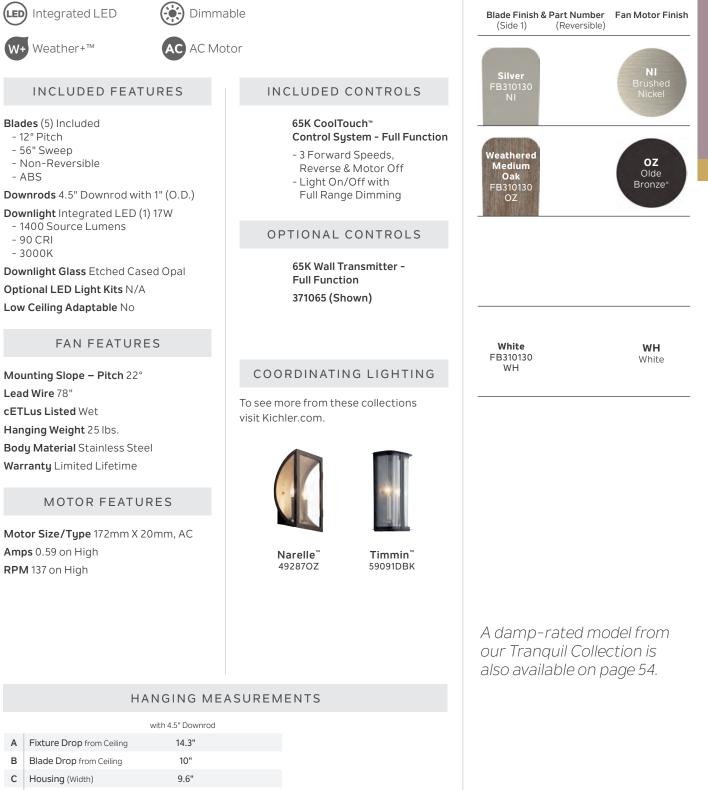

D Ceiling Canopy (Width)

Fixture Drop (A) includes light kit

AIR PERFORMANCE

PRODUCT FEATURES

 Airflow
 Power Usage

 Cubic Ft. Per Minute on High
 Watts on High (Excludes Lights)

5.9"

71

Airflow Efficiency Cubic Ft. Per Minute Per Watt 86

6102

Kichler.com

99




310115ANS Antique Satin Silver Finish with Antique Satin Silver Blades

80" Lehr™ Weather+™



310115CMO Coffee Mocha Finish Coffee Mocha Blades 310115DBK Distressed Black Finish Distressed Black Blades

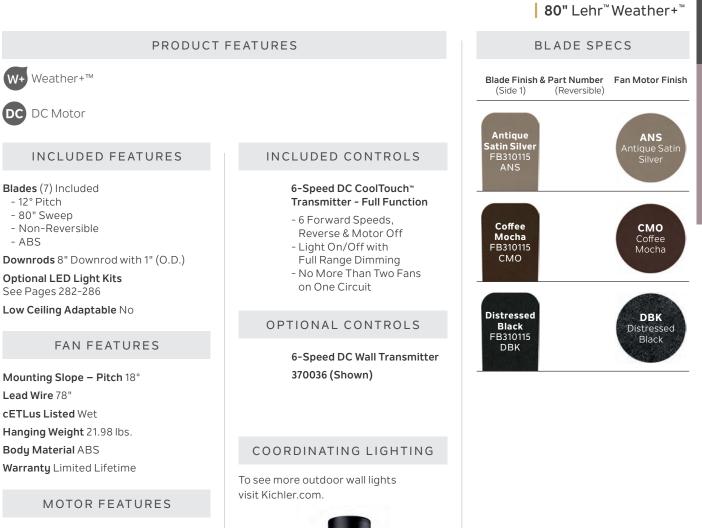


Motor Size/Type DC-165L Amps 0.56 on High RPM 78 on High

Wall Light 11309BKTLED

HANGING MEASUREMENTS

		with 8" Downrod
А	Fixture Drop from Ceiling	19.25"
в	Blade Drop from Ceiling	13.5"
С	Housing (Width)	10.25"
D	Ceiling Canopy (Width)	6.75"



Fixture Drop (A) includes light kit


AIR PERFORMANCE		
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
7744	33	237

Kichler.com 101

WEATHER+

Shown: **310112ANS** Antique Satin Silver Finish with Antique Satin Silver Blades



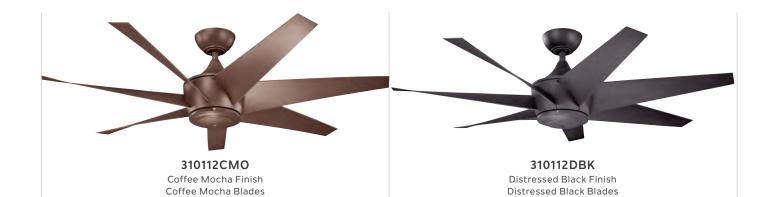




BLADE SPECS **PRODUCT FEATURES** W+ Weather+™ Energy Star Blade Finish & Part Number Fan Motor Finish (Reversible) (Side 1) DC DC Motor Antique Satin Silver FB310112 ANS ANS Antique Satin Silve INCLUDED FEATURES INCLUDED CONTROLS Blades (7) Included 6-Speed DC CoolTouch[™] - 12° Pitch **Transmitter - Full Function** - 54" Sweep - 6 Forward Speeds, Coffee - Non-Reversible смо Reverse & Motor Off **Mocha** FB310112 Coffee - ABS - Light On/Off with Mocha Downrods 8" Downrod with 1" (O.D.) Full Range Dimming СМО - No More Than Two Fans **Optional LED Light Kits** on One Circuit See Pages 282-286 Low Ceiling Adaptable No Distressed OPTIONAL CONTROLS DBK Black Distressed FB310112 DBK Black FAN FEATURES 6-Speed DC Wall Transmitter 370036 (Shown) Mounting Slope – Pitch 18° Lead Wire 78" cETLus Listed Wet Hanging Weight 15.19 lbs. **Body Material ABS** Warranty Limited Lifetime MOTOR FEATURES Motor Size/Type DC-125 Amps 0.54 on High RPM 106 on High Energy Star[®] Yes

HANGING MEASUREMENTS

		with 8" Downrod
А	Fixture Drop from Ceiling	15.5"
в	Blade Drop from Ceiling	13.5"
С	Housing (Width)	10.25"
D	Ceiling Canopy (Width)	6.75"





Fixture Drop (A) includes light kit


AIR PERFORMANCE		
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
5133	31	165



60" Surrey Weather+™



300250SBK Satin Black Finish Satin Black Blades 300250SNB Satin Natural Bronze Finish Satin Natural Bronze Blades

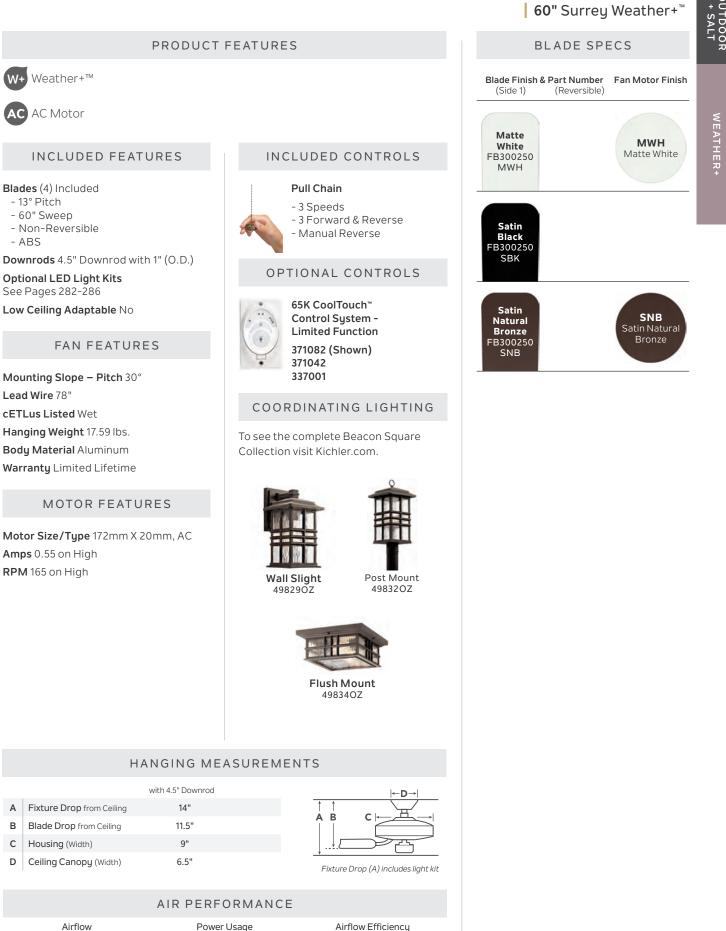

Airflow Cubic Ft. Per Minute on High

6246

Watts on High (Excludes Lights) 65

Airflow Efficiency Cubic Ft. Per Minute Per Watt

96

Kichler.com 105

OUTDOOR + SALT

9


Shown: 339629MWH Matte White Finish

with Matte White Blades

52" Arkwet[™] Weather+[™]



Weathered Copper Powder Coat Finish Brown Blades 339629WSP Weathered Steel Powder Coat Finish Satin Black or Silver Blades

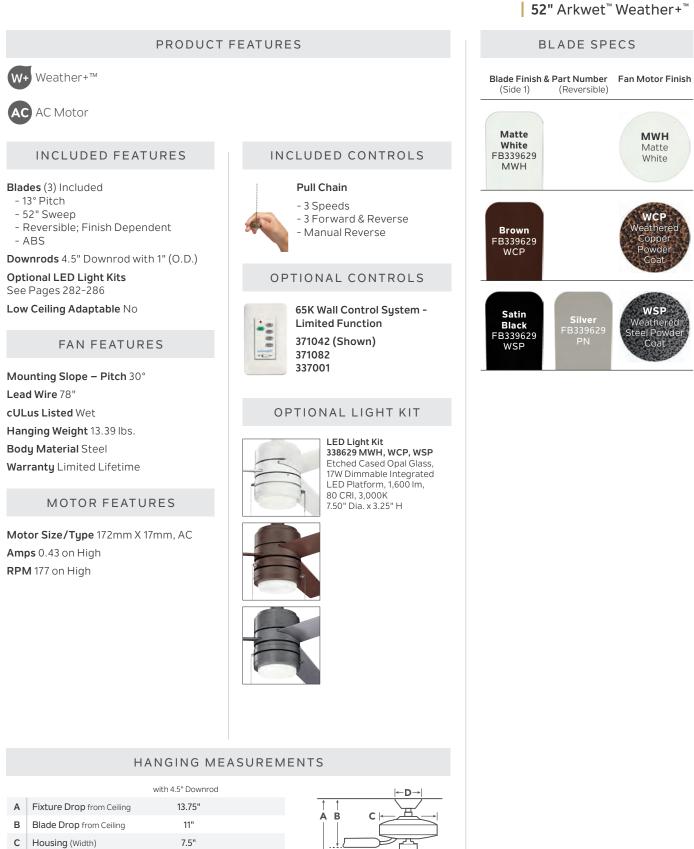

D Ceiling Canopy (Width)

7.5"	
6"	




	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
5024	49	103

WEATHER+



60" Kevlar™ Weather+™


310150WCP Weathered Copper Powder Coat Finish Brown Blades

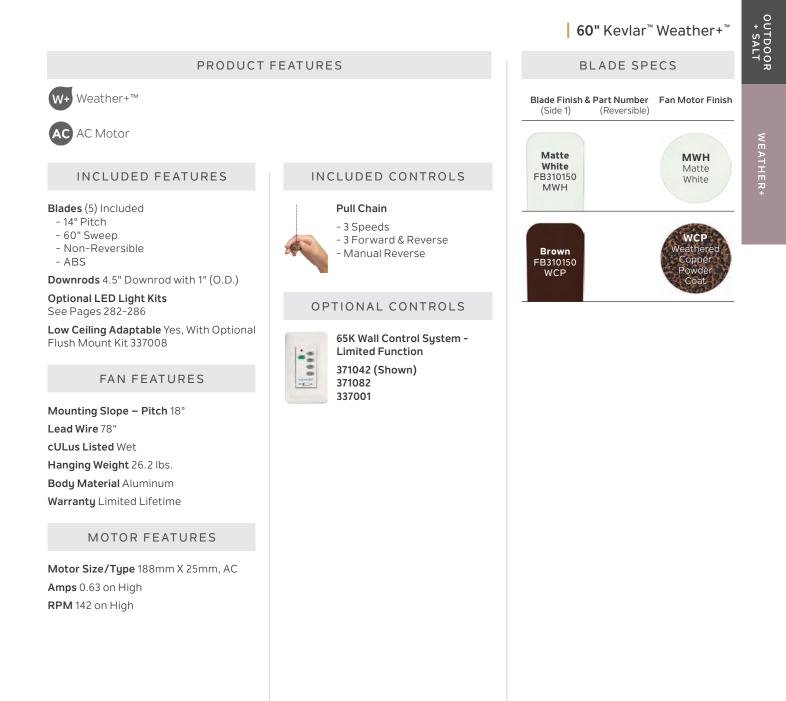

HANGING MEASUREMENTS

		with 4.5" Downrod
А	Fixture Drop from Ceiling	13.75"
в	Blade Drop from Ceiling	11.5"
С	Housing (Width)	13"
D	Ceiling Canopy (Width)	6.75"





Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
6136	75	82

Shown: **320500CMO** Coffee Mocha Finish with 370035 Ivory with Walnut Highlights All-Weather ABS Blades (Blades Sold Separately)

$52^{\prime\prime}\!/54^{\prime\prime}\!/56^{\prime\prime} \ \text{Canfield}^{^{\scriptscriptstyle \rm M}} \text{ Weather}^{^{\scriptscriptstyle \rm M}} \text{ Motor Assembly}$







PRODUCT FEATURES **BLADE SPECS** W+ Weather+™ Blade Finish & Part Number Fan Motor Finish (Side 1) (Reversible) AC Motor смо Coffee INCLUDED FEATURES INCLUDED CONTROLS Mocha Blades (5) Included Pull Chain - 14° Pitch - 3 Speeds - Multiple Sweeps - 3 Forward & Reverse - Optional ABS or Wood - Manual Reverse Downrods 4" Downrod with 1" (O.D.) **Optional LED Light Kits** Customize Canfield[™] to your See Pages 282-286 OPTIONAL CONTROLS personal style in 3 easy steps: Uplight N/A 65K Wall Control System -Uplight Glass N/A Limited Function Low Ceiling Adaptable No Fan Size (52," 54" or 56") 371042 (Shown) 371082 FAN FEATURES 337001 Light Kit (see pages 282-286) Mounting Slope – Pitch 30° Blade Kit (see page 288) ACCESSORY BLADE OPTIONS Lead Wire 78" cULus Listed Wet Blades sets sold separately. Choose your Find Coffee Mocha downrods Hanging Weight 19.9 lbs. fan finish and then the perfect matching length options 360000-360006 blade set. See more on page 288. **Body Material ABS** on page 290. Warranty Limited Lifetime 371017 W Walnut Shadowed All-Weather MOTOR FEATURES ABS Blades Motor Size/Type 188mm X 25mm, AC 370034 W Brown Rattan Amps 0.61 on High All-Weather ABS Blades RPM 180 on High 370021 W White Washed Oak All-Weather ABS Blades 371019 🖤 Aged White All-Weather ABS Blades HANGING MEASUREMENTS with 4" Downrod Α Fixture Drop from Ceiling 13.00" С B Δ в 11.25" Blade Drop from Ceiling С Housing (Width) 12.50" Ceiling Canopy (Width) 6.75" D Fixture Drop (A) includes light kit

86

Airflow Power Usage Airflow Efficiency Cubic Ft. Per Minute on High Watts on High (Excludes Lights) Cubic Ft. Per Minute Per Watt 73

AIR PERFORMANCE

6231

Kichler.com 111



Fandeliers & Wall Fans

Taking multitasking to a new level.

53

SI 83 83

33

1

Our fandeliers and wall fans are ideal for smaller size installations or multiple installations in larger areas. Offering a unique design, these fans provide comfort and style to any space. Shown: 300040SBK Satin Black Finish with Satin Black Blades

25" Cavelli



300040SNB Satin Natural Bronze Finish Satin Natural Bronze Blades

BLADE SPECS



INCLUDED FEATURES

Blades (3) Included

AC AC Motor

- 21° Pitch
- 13" Sweep
- Non-Reversible
- ABS

Downrods 6" Downrod with 1" (O.D.)

- Downlight Bulb (4) 7W
- 3200 Source Lumens
- 90 CRI
- 2700K

Downlight Glass N/A

Optional LED Light Kits N/A Low Ceiling Adaptable No

FAN FEATURES

Mounting Slope – Pitch 30° Lead Wire 78" cULus Listed Dry Hanging Weight 28.6 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 8225X1, AC Amps 0.39 on High RPM 1501 on High

INCLUDED CONTROLS

65K Wall Control System -Limited Function

- 3 Forwards Speeds
- & Motor Off

PRODUCT FEATURES

- Manual Reverse - Light On/Off with
- Full Range Dimming - Faceplates Included in
- 3 Colors

OPTIONAL CONTROLS



65K CoolTouch[™] Transmitter -Limited Function 370005 (Shown)

COORDINATING LIGHTING

To see more from these collections visit Kichler.com.




Sevan™ 52140BK



45295BK

HANGING MEASUREMENTS

		with 1" Downrod
А	Fixture Drop from Ceiling	16.5"
в	Blade Drop from Ceiling	14"
С	Housing (Width)	7.5"
D	Ceiling Canopy (Width)	5.75"



Cavelli's full width is 25"

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
1935	47	41

INDOOR

Shown: 300041BSS Brushed Stainless Steel Finish with Silver Blades






300041SBK Satin Black Finish Satin Black Blades

BLADE SPECS

Blade Finish & Part Number Fan Motor Finish (Side 1) (Reversible) **Silver** FB300041

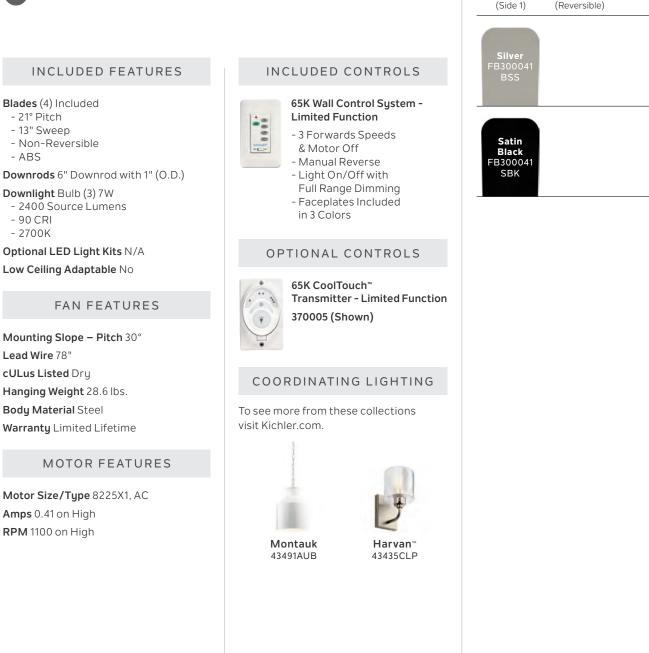

HANGING MEASUREMENTS

PRODUCT FEATURES

AC AC Motor

Blades (4) Included

- Non-Reversible

Downlight Bulb (3) 7W

- 2400 Source Lumens

- 21° Pitch

- ABS

- 90 CRI - 2700K


Lead Wire 78" cULus Listed Dry

Hanging Weight 28.6 lbs. Body Material Steel

Amps 0.41 on High RPM 1100 on High

- 13" Sweep

		with 6" Downrod
А	Fixture Drop from Ceiling	17.75"
в	Blade Drop from Ceiling	13.75"
С	Housing (Width)	7.5"
D	Ceiling Canopy (Width)	5.75"




Eyrie's full width is 23"

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
1226	44	28




Shown: 339224NI Brushed Nickel Finish with Brushed Nickel Blades



339224SNB Satin Natural Bronze Finish Satin Natural Bronze Blades

BLADE SPECS





AC Motor

INCLUDED FEATURES

Blades (3) Included

- 10° Pitch
- 24" Sweep
- Non-Reversible
- Steel

Low Ceiling Adaptable No

FAN FEATURES

Mounting Slope – Pitch Wall Mount Only Power Supply Cord 108" or 9' cULus Listed Wet Hanging Weight 37.65 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type PSC139-640, AC Amps 2.65 on High




- 3 Speeds - 3 Forward & Reverse - Manual Reverse

PRODUCT FEATURES

Please Note: Wall plug comes standard with this model (not shown).

INCLUDED CONTROLS



Overall Fan Dimensions



11

6"



1.87"

OUTDOOR

Shown: 339218NI Brushed Nickel Finish with Nickel Blades


18" Pola[™]



339218SNB Satin Natural Bronze Finish Satin Natural Bronze Blades

18" Pola[™]

BLADE SPECS



Blade Finish & Part Number (Side 1) (Reversible) Satin Natural Bronze







INCLUDED FEATURES

Blades (3) Included

- 10° Pitch
- 18" Sweep
- Non-Reversible
- Steel

Low Ceiling Adaptable No

FAN FEATURES

Mounting Slope - Pitch Wall Mount Only Power Supply Cord 108" or 9' cULus Listed Wet Hanging Weight 25.35 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type PSC127-625C, AC Amps 2 on High






PRODUCT FEATURES

Pull Chain - 3 Speeds - 3 Forward & Reverse

- Manual Reverse

Please Note: Wall plug comes standard with this model (not shown).



Overall Fan Dimensions Wall Bracket Dimensions

11

6"

Mounting Bracket

1.87"






Ceiling Fah Collections

A Company

Grand in scale or small in stature. Inside living or outdoor entertaining. Our extensive collection leaves no detail to chance, with unique designs that not only look beautiful but move air efficiently and effectively. Shown: 300052DBK Distressed Black Finish, Etched Cased Opal Glass, with Auburn Stained Blades





52" Colerne™

INDOOR

BLADE SPECS

(Side 1)



Kichler.com 125



PRODUCT FEATURES

AC AC Motor

(LED) Integrated LED

Dimmable

INCLUDED FEATURES

Blades (5) Included

- 12° Pitch
- 52" Sweep
- Non-Reversible
- Wood

Downrods 6" Downrod with 1" (O.D.)

Downlight Integrated LED (1) 17W

- 1600 Source Lumens
- 80 CRI
- 3000K

Downlight Glass Etched Cased Opal

Optional LED Light Kits N/A

Low Ceiling Adaptable No

FAN FEATURES

Mounting Slope – Pitch 30° Lead Wire 78" cETLus Listed Dry Hanging Weight 24.7 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 15mm, AC Amps 0.59 on High RPM 183 on High

INCLUDED CONTROLS

65K Wall Control System -**Full Function**

- 3 Forward Speeds,
- Reverse & Motor Off
- Light On/Off with
- Full Range Dimming
- Faceplates Included
 - in 3 Colors

OPTIONAL CONTROLS



65K CoolTouch[™] Transmitter - Full Function 370006 (Shown)

COORDINATING LIGHTING

To see the complete Colerne[™] Collection visit Kichler.com.




Chandelier 43491AUB

Pendant 43435CLP

HANGING MEASUREMENTS

		with 6" Downrod
А	Fixture Drop from Ceiling	17"
в	Blade Drop from Ceiling	12.5"
С	Housing (Width)	9.5"
D	Ceiling Canopy (Width)	7.25"



Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
5205	70	75


Shown: 300027AP Antique Pewter Finish, Etched Cased Opal Glass, with Weathered White Walnut Blades





52" Ridley[™] II




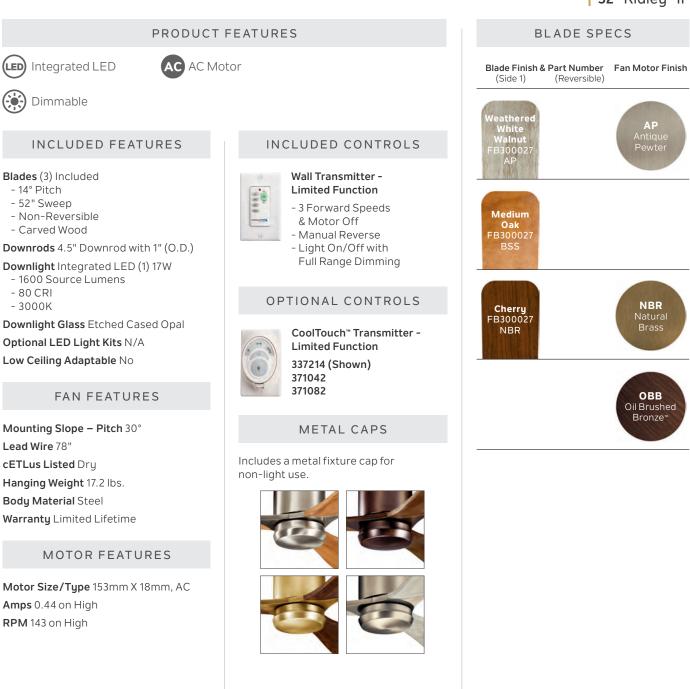

HANGING MEASUREMENTS

hrod

		with 4.5" Dowr
А	Fixture Drop from Ceiling	14.5"
в	Blade Drop from Ceiling	13.25"
С	Housing (Width)	6.75"
D	Ceiling Canopy (Width)	5.75"



Fixture Drop (A) includes light kit


	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
4388	50	87



310240DBK Distressed Black Finish, Clear Seeded Glass, with Walnut Shadowed or Light Walnut Blades

60" Lyndon[™] Patio



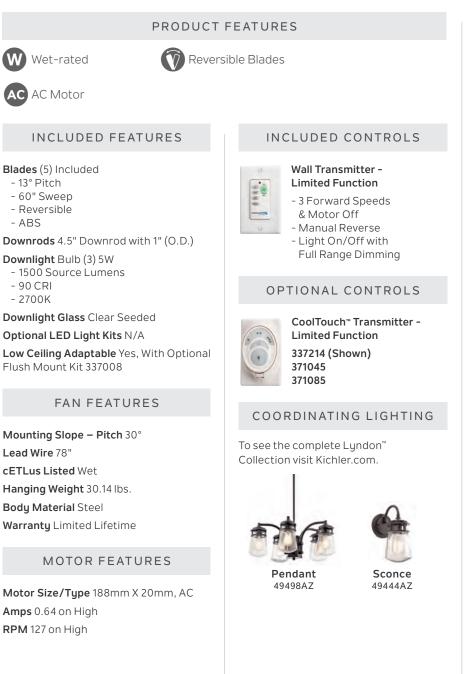


BLADE SPECS Blade Finish & Part Number Fan Motor Finish OUTDOOR

HANGING MEASUREMENTS

		with 4.5" Downrod
А	Fixture Drop from Ceiling	19"
в	Blade Drop from Ceiling	13.25"
С	Housing (Width)	12.25"
D	Ceiling Canopy (Width)	6.75"





Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
5393	74	72



60" KICHLER LYNDON[™] PATIO CEILING FAN






- Melissa M | Florida

Shown: **310239DBK** Distressed Black Finish, Clear Seeded Glass, with Dark Walnut or Light Walnut Blades





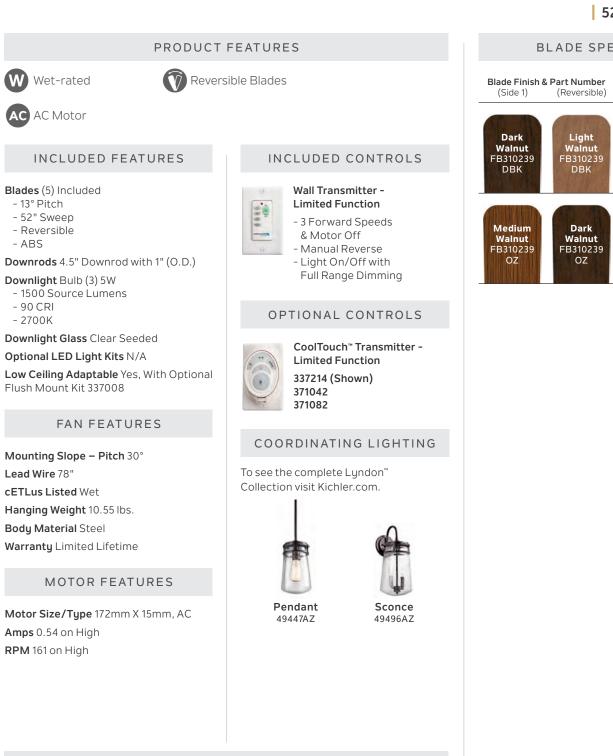

Fan Motor Finish

DBK

Distressed

Black

οz

Olde Bronze®

BLADE SPECS

(Reversible)

Light Walnut FB310239 DBK

Dark

Walnut FB310239


ΟZ

OUTDOOR

HANGING MEASUREMENTS

		with 4.5" Downrod
А	Fixture Drop from Ceiling	19"
в	Blade Drop from Ceiling	13"
С	Housing (Width)	9.5"
D	Ceiling Canopy (Width)	6.75"






Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
4946	65	77


Shown: 310100AVI Anvil Iron Finish, Etched Cased Opal Glass, with Distressed Antique Gray or Walnut Blades



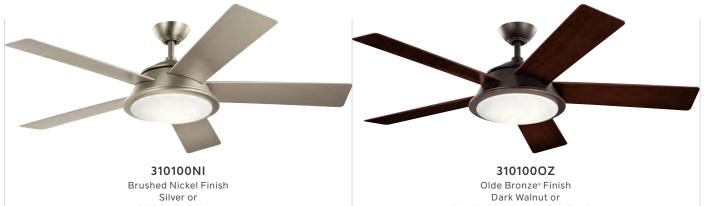

Driftwood Blades Etched Cased Opal Glass Weathered Medium Oak Blades Etched Cased Opal Glass

COVERED OUTDOOR

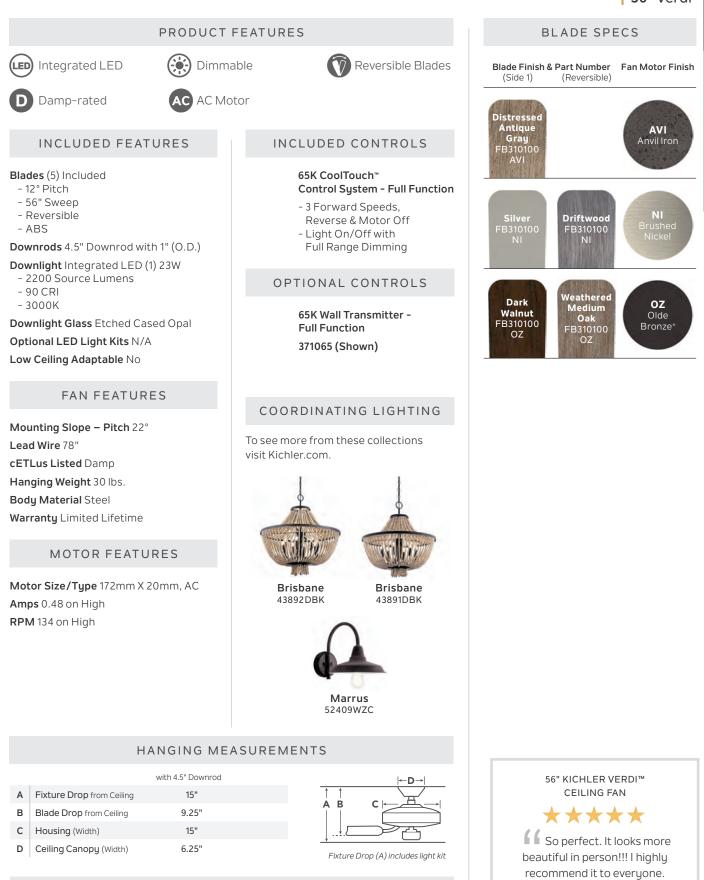

AIR PERFORMANCE Airflow Power Usage Airflow Efficiency Cubic Ft. Per Minute on High Watts on High (Excludes Lights) Cubic Ft. Per Minute Per Watt 57 85

4836

It works really well and looks

so nice. I have gotten many

compliments already...

- Jcarrr99 | Pennsylvania



54" Daya

310072SBK


Satin Black Finish Satin Black Blades Etched Cased Opal Glass


NI

BLADE SPECS






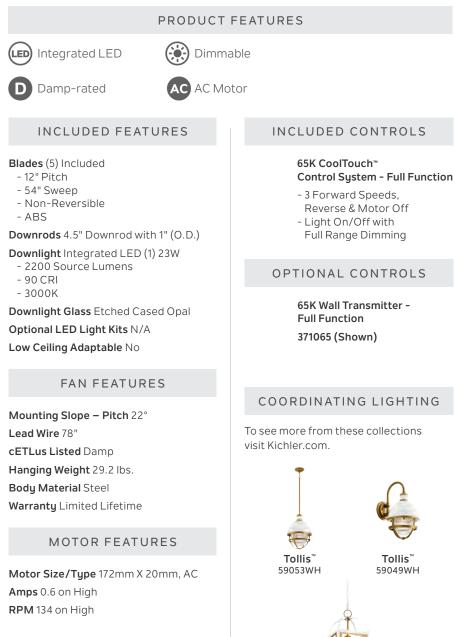



HANGING MEASUREMENTS

		with 4.5" Downrod
А	Fixture Drop from Ceiling	15"
в	Blade Drop from Ceiling	8.75"
С	Housing (Width)	10.25"
D	Ceiling Canopy (Width)	6"



Vath[®] 52030WHNBR

80

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Wa

5715

71

ute Per Watt

54" KICHLER DAYA™ CEILING FAN

 $\star \star \star \star \star$

Great style! Light is adorable, Fan blades are good quality and look great against our white ceilings. A great piece for any room! It was relatively easy to install. Kichler is a well known brand because of its quality...

- Sahar | Texas

Blade Finish & Part Number Fan Motor Finish (Reversible)

(Side 1)


Silver FB310072

Satin Black FB310072


SBK

Shown: **310204WCP** Weathered Copper Powder Coat Finish, Etched Cased Opal Glass, with Dark Walnut or Medium Walnut Blades



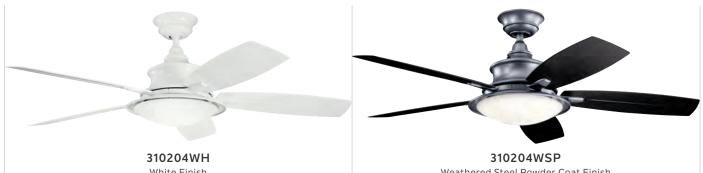

White Finish White Blades Etched Cased Opal Glass Weathered Steel Powder Coat Finish Black or Weathered White Walnut Blades Etched Cased Opal Glass

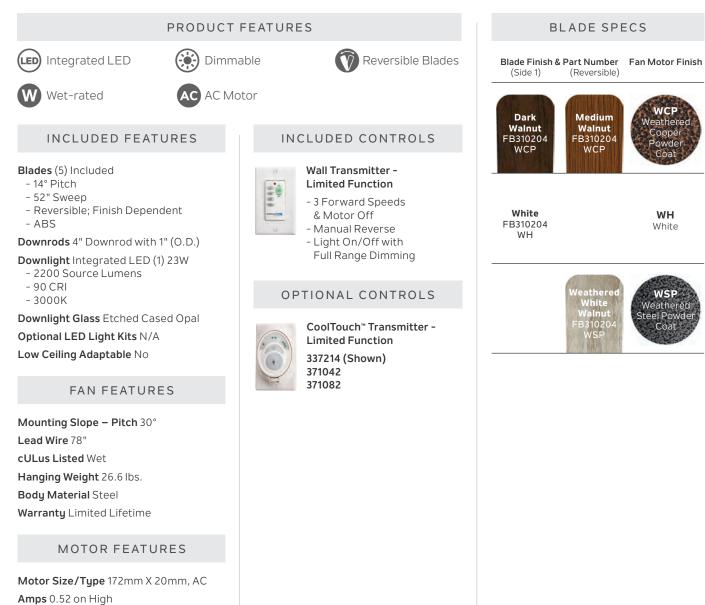


HANGING MEASUREMENTS

with 4" Downrod 16.25" A Fixture Drop from Ceiling в Blade Drop from Ceiling С Housing (Width) D Ceiling Canopy (Width)

RPM 165 on High

12" 14.75" 7"



Fixture Drop (A) includes light kit


	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
4955	62	79



Shown: 310181SBK Satin Black Finish, Cased Opal Glass, with Black or Silver Blades

54" _{Seaside}™⊸



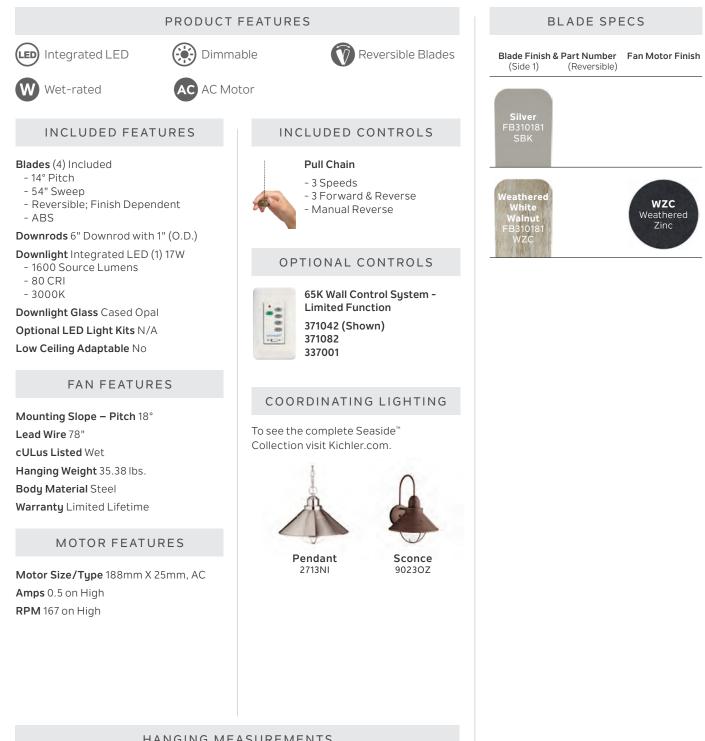

HANGING MEASUREMENTS

		with 6" Downrod
А	Fixture Drop from Ceiling	19.5"
в	Blade Drop from Ceiling	10.25"
С	Housing (Width)	15"
D	Ceiling Canopy (Width)	6.25"

Fixture Drop (A) includes light kit

AIR PERFORMANCE		
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
5564	60	93

Kichler.com 139


С B Α

Shown: **300457AP** Antique Pewter Finish, Etched Cased Opal Glass, with Black Cherry or Light Cherry Blades





Fan Motor Finish

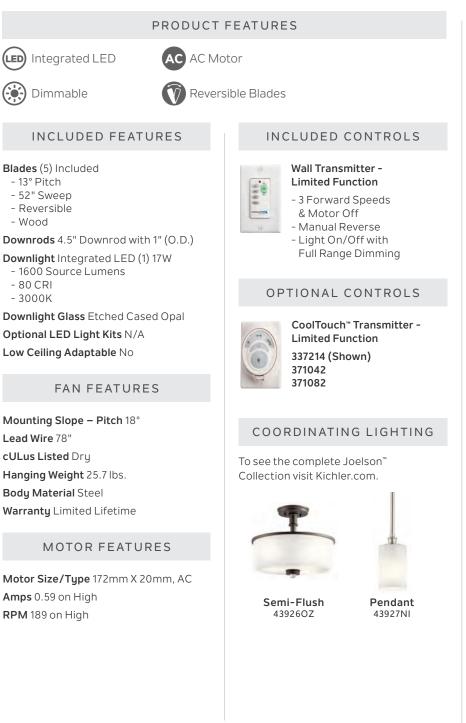

BLADE SPECS

(Reversible)

Blade Finish & Part Number


(Side 1)

INDOOR

Motor Size/Type 172mm X 20mm, AC Amps 0.59 on High RPM 189 on High

HANGING MEASUREMENTS

		with 4.5" Downrod
А	Fixture Drop from Ceiling	16.5"
в	Blade Drop from Ceiling	12.5"
С	Housing (Width)	10.25"
D	Ceiling Canopy (Width)	5.75"



Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
6326	70	90




Shown: **330000NI** Brushed Nickel Finish, Etched Cased Opal Glass, with Walnut or Silver Blades









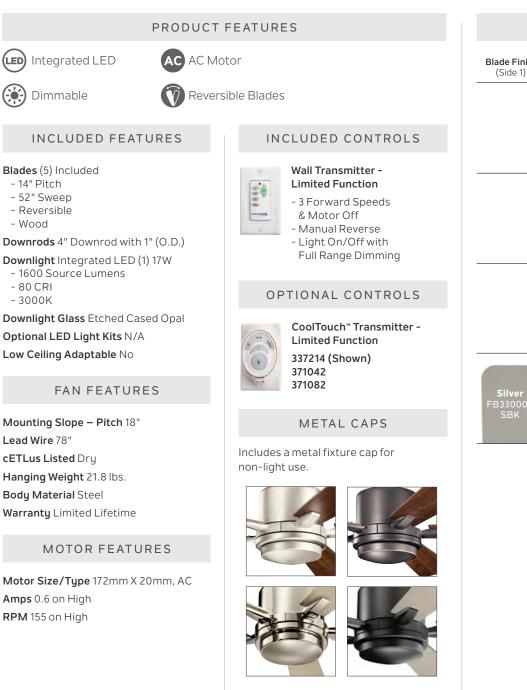


HANGING MEASUREMENTS

		with 4" Downrod
А	Fixture Drop from Ceiling	14"
в	Blade Drop from Ceiling	9.75"
С	Housing (Width)	7.5"
D	Ceiling Canopy (Width)	5.25"

- Wood

- 80 CRI

- 3000K



Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
5356	72	75

Blade Finish & Part Number Fan Motor Finish (Reversible)

BLADE SPECS






330243MWH Matte White Finish with Matte White Blades


60" Lucian™ II*



Brushed Nickel Finish Walnut or Silver Blades **3302430Z** Olde Bronze[®] Finish Cherry or Walnut Blades

60" Lucian[™] II



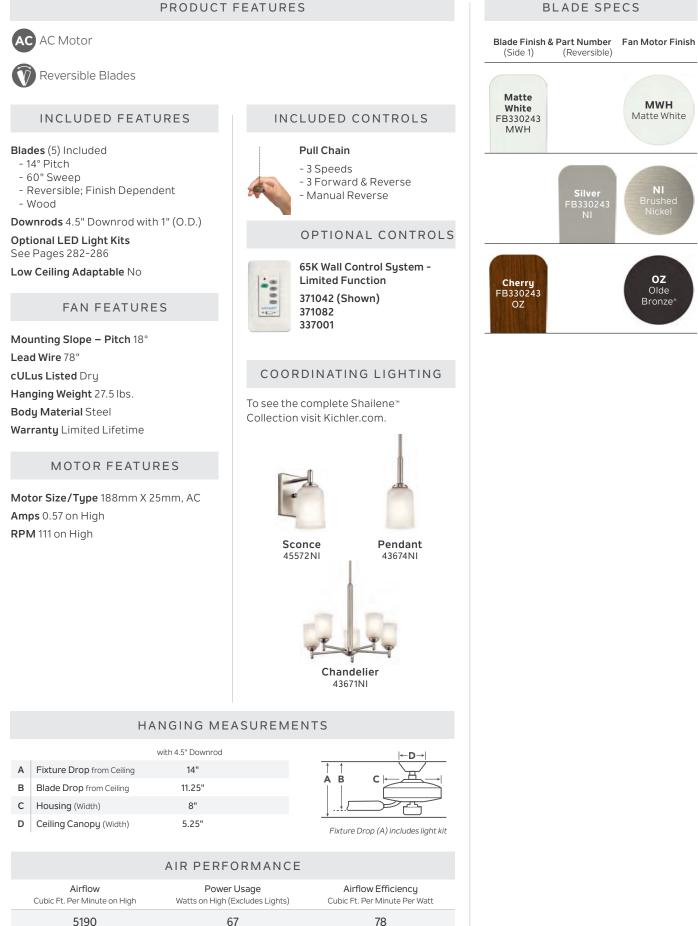




52" Lucian[™] II*



330242MWH Matte White Finish Matte White Blades

52" Lucian[™] II

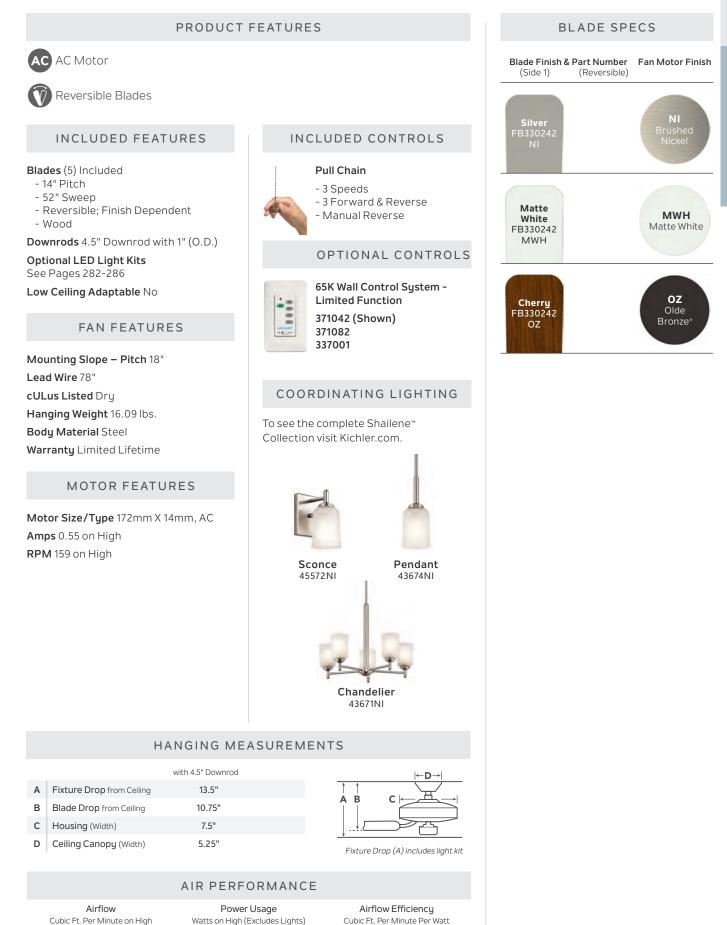

66

4411

67









3302410Z Olde Bronze[®] Finish Walnut or Cherry Blades

42" Lucian[™] II



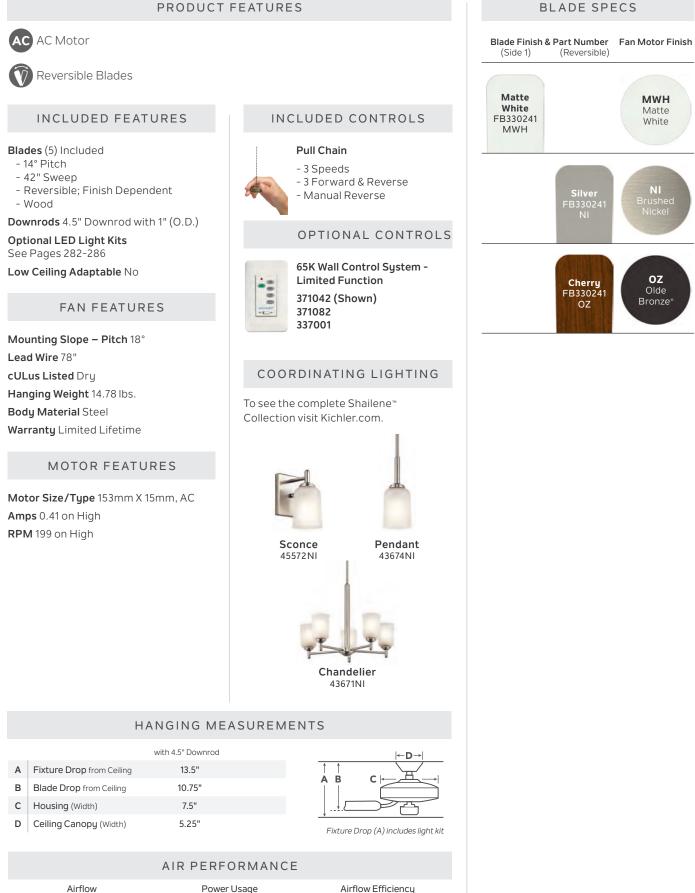

Cubic Ft. Per Minute Per Watt

70

Cubic Ft. Per Minute on High

3402

Watts on High (Excludes Lights)

48

Kichler.com 149






310155SBK

Satin Black Finish Satin Black Blades Etched Cased Opal Glass

60" Rana[™]





(LED) Integrated LED Dimmable Wet-rated AC Motor INCLUDED FEATURES Blades (3) Included - 35° Pitch - 60" Sweep - Non-Reversible - ABS **Downrods** 6" Downrod with 1" (O.D.) Downlight Integrated LED (1) 17W - 1600 Source Lumens - 80 CRI - 3000K Downlight Glass Etched Cased Opal Optional LED Light Kits N/A Low Ceiling Adaptable No FAN FEATURES

Mounting Slope – Pitch 30° Lead Wire 78" cULus Listed Wet Hanging Weight 25.1 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 20mm, AC Amps 0.59 on High RPM 206 on High

INCLUDED CONTROLS Wall Transmitter -**Full Function** - 3 Forward Speeds & Motor Off - Manual Reverse - Light On/Off with Full Range Dimming OPTIONAL CONTROLS



PRODUCT FEATURES

CoolTouch[™] Transmitter -**Full Function** 337009 (Shown) 371045 371085

METAL CAPS


Includes a metal fixture cap for non-light use.



Blade Finish & Part Number Satin Black FB310155 Satin Black SBK

HANGING MEASUREMENTS

		with 6" Downrod
А	Fixture Drop from Ceiling	15.75"
в	Blade Drop from Ceiling	14.5"
С	Housing (Width)	8.75"
D	Ceiling Canopy (Width)	5.75"



Fixture Drop (A) includes light kit

AIR PERFORMANCE		
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
8536	70	121




3002380LZ Oiled Bronze Finish, Etched Cased Opal Glass, with Medium Cherry Blades






BLADE SPECS

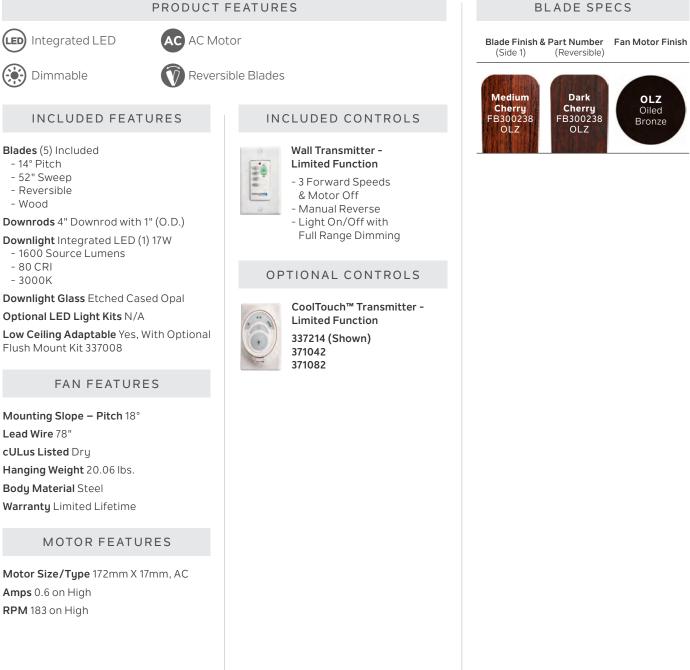

HANGING MEASUREMENTS

		with 4" Downrod
А	Fixture Drop from Ceiling	16.25"
в	Blade Drop from Ceiling	11.25"
С	Housing (Width)	12"
D	Ceiling Canopy (Width)	6.5"





Fixture Drop (A) includes light kit

Airflow	Power Usage	Airflow Efficiency
Cubic Ft. Per Minute on High 6195	Watts on High (Excludes Lights)	Cubic Ft. Per Minute Per Watt








70" Monarch[™]

BLADE SPECS

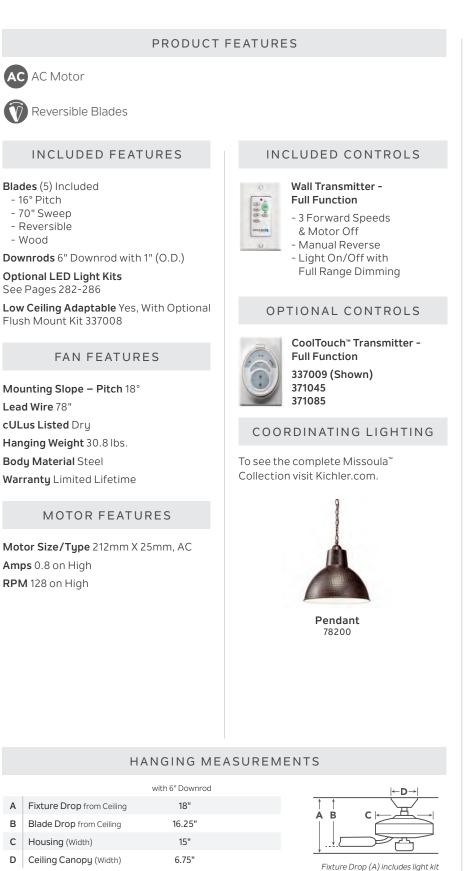

AIR PERFORMANCE

Power Usage

Watts on High (Excludes Lights)

97

Airflow

Cubic Ft. Per Minute on High

9411

Airflow Efficiency

Cubic Ft. Per Minute Per Watt

97

Blade Finish & Part Number Fan Motor Finish (Side 1) (Reversible) leathered BAP Dark White Walnut B300200 BAP Burnished Antique Pewter Cherry FB300206 BAP OBB Cherry Walnut Oil Brushed FB300206 FB300206 Bronze™ OBB OBB Dark TZ Teak Cherry FB300206 Tannery FB300206 Bronze ΤZ TZ

DRY LOCATIONS



Shown: 310206WCP Weathered Copper Powder Coat Finish with Brown Blades





Weathered Steel Powder Coat Finish Weathered White Walnut Blades



BLADE SPECS

Blade Finish & Part Number Fan Motor Finish (Side 1) (Reversible)



Wet-rated

AC Motor

INCLUDED FEATURES

Blades (5) Included

- 16° Pitch
- 70" Sweep
- Non-Reversible
- ABS

Downrods 6" Downrod with 1" (O.D.)

Optional LED Light Kits See Pages 282-286

Low Ceiling Adaptable Yes, With Optional Flush Mount Kit 337008

FAN FEATURES

Mounting Slope – Pitch 30° Lead Wire 78" cULus Listed Wet Hanging Weight 30.8 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES


Motor Size/Type 212mm X 25mm, AC Amps 0.78 on High RPM 122 on High



PRODUCT FEATURES

Wall Transmitter -**Full Function** - 3 Forward Speeds

INCLUDED CONTROLS



- Light On/Off with Full Range Dimming

OPTIONAL CONTROLS




CoolTouch[™] Transmitter -**Full Function** 337009 (Shown) 371045 371085

HANGING MEASUREMENTS

		with 6" Downrod
А	Fixture Drop from Ceiling	18.25"
в	Blade Drop from Ceiling	16.25"
С	Housing (Width)	15"
D	Ceiling Canopy (Width)	6.75"





Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
8339	94	89

Kichler.com 157






Monarch[™] II Select



Walnut or Cherry Blades Satin Etched Glass

Olde Bronze[®] Finish Walnut or Cherry Blades Satin Etched Glass

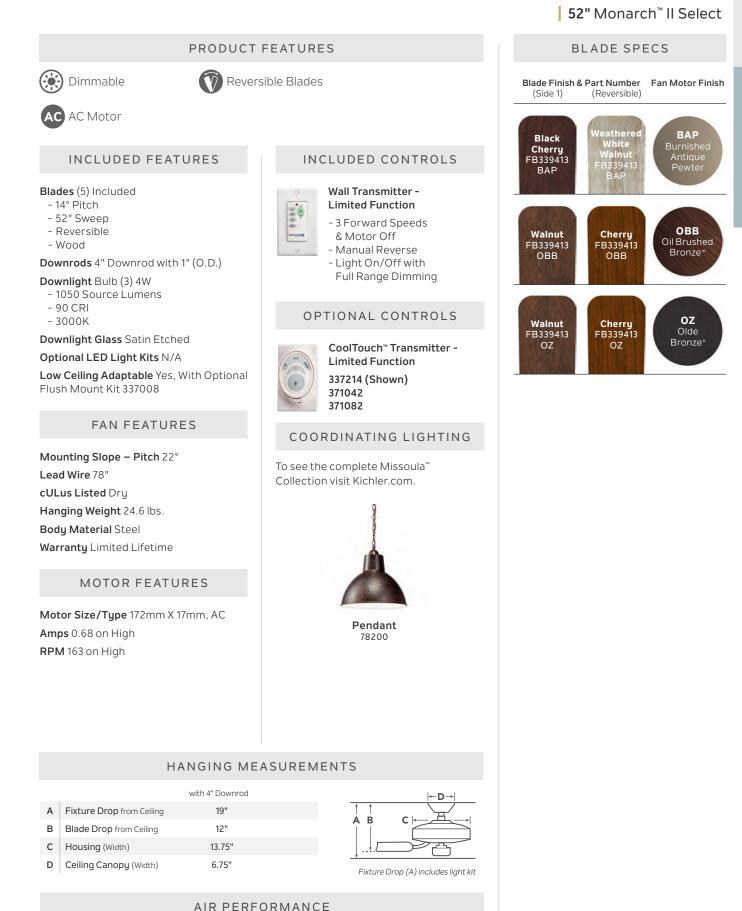

Airflow Efficiency

Cubic Ft. Per Minute Per Watt

68

Airflow

Cubic Ft. Per Minute on High

5472

Power Usage

Watts on High (Excludes Lights)

81



with Walnut or Light Cherry Blades






Tannery Bronze™ Finish Teak or Dark Cherry Blades

52" Monarch[™] II

BLADE SPECS

INDOOR



PRODUCT FEATURES



Reversible Blades

INCLUDED FEATURES

Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible

- Wood

Downrods 4" Downrod with 1" (O.D.)

Optional LED Light Kits See Pages 282-286

Low Ceiling Adaptable Yes, With Optional Flush Mount Kit 337008

FAN FEATURES

Mounting Slope – Pitch 18° Lead Wire 78" cULus Listed Dry Hanging Weight 20.7 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 17mm, AC Amps 0.63 on High RPM 176 on High



INCLUDED CONTROLS

CoolTouch[™] Transmitter -Limited Function

- 3 Forward Speeds

- & Motor Off
- Manual Reverse - Light On/Off with
- Full Range Dimming


OPTIONAL CONTROLS



Wall Transmitter -Limited Function 370039 (Shown) 371042 371082

HANGING MEASUREMENTS

		with 4" Downrod
А	Fixture Drop from Ceiling	13.25"
в	Blade Drop from Ceiling	12.75"
С	Housing (Width)	13.75"
D	Ceiling Canopy (Width)	6.75"



Fixture Drop (A) includes light kit

AIR PERFORMANCE		
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
4889	73	67

Kichler.com 161




310103DBK Distressed Black Finish, with Walnut or Walnut Shadowed Blades


$52^{\prime\prime}\,\,\text{Monarch}^{\scriptscriptstyle\rm M}\,\text{II}\,\text{Patio}$



310103WCP Weathered Copper Powder Coat Finish Medium Walnut or Dark Walnut Blades

BLADE SPECS



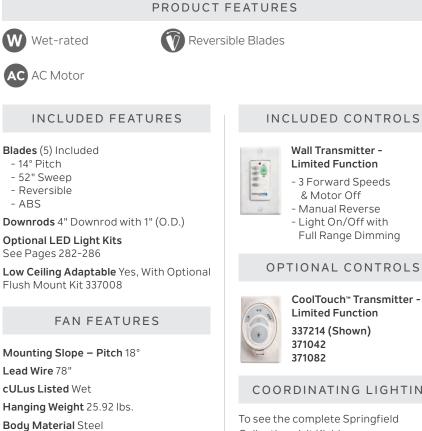

MOTOR FEATURES

Warranty Limited Lifetime

- 14° Pitch

- ABS

Motor Size/Type 172mm X 17mm, AC Amps 0.68 on High RPM 163 on High

INCLUDED CONTROLS

Wall Transmitter -Limited Function



& Motor Off

- Manual Reverse - Light On/Off with Full Range Dimming
- OPTIONAL CONTROLS

Limited Function 337214 (Shown)

COORDINATING LIGHTING

To see the complete Springfield Collection visit Kichler.com.




Light Post 49987DBK



Wall Light 49986DB

HANGING MEASUREMENTS

		with 4" Downrod
А	Fixture Drop from Ceiling	14.5"
в	Blade Drop from Ceiling	12.75"
С	Housing (Width)	13.75"
D	Ceiling Canopy (Width)	6.75"



Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
5532	82	68

Shown: 300700AP Antique Pewter Finish, Etched Cased Opal Glass, with Walnut Blades



300700MWH

Matte White Finish Weathered White Walnut Blades


Etched Cased Opal Glass




300700NI Brushed Nickel Finish Driftwood Blades Etched Cased Opal Glass



INDOOR

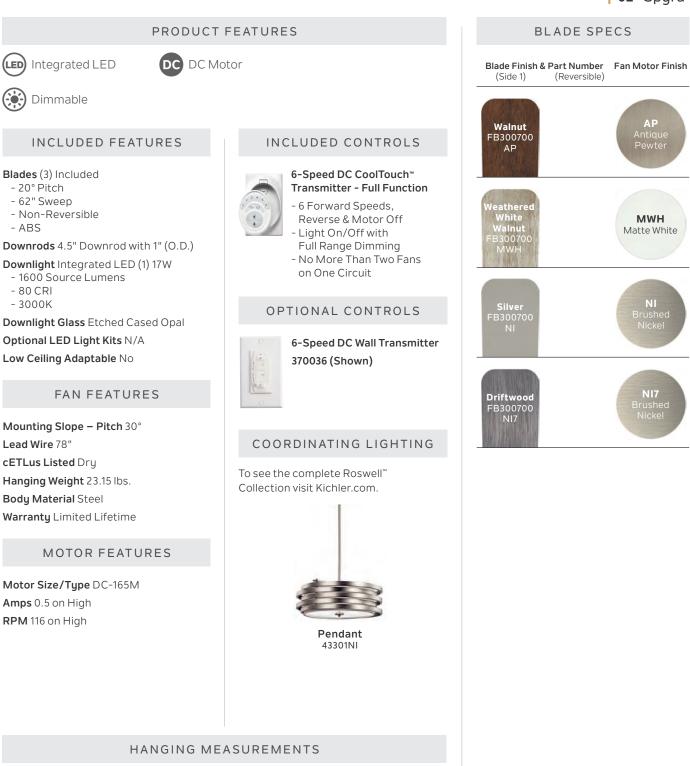

		with 4.5" Downrod
А	Fixture Drop from Ceiling	14.25"
в	Blade Drop from Ceiling	14.25"
С	Housing (Width)	12.75"
D	Ceiling Canopy (Width)	6.75"



Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
6467	36	181


Shown: 300060NI Brushed Nickel Finish, White Polycarbonate Lens, with Silver Blades

60" Zeus



BLADE SPECS



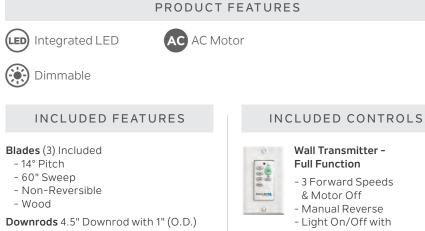

Downlight Integrated LED (1) 17W

- 1600 Source Lumens
- 80 CRI
- 3000K

Downlight Glass White Polycarbonate Lens

Optional LED Light Kits N/A Low Ceiling Adaptable No

FAN FEATURES

Mounting Slope – Pitch 30° Lead Wire 78" cETLus Listed Dry Hanging Weight 22.13 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC Amps 0.66 on High RPM 170 on High

- Manual Reverse - Light On/Off with Full Range Dimming

OPTIONAL CONTROLS


& Motor Off



CoolTouch[™] Transmitter -**Full Function** 337009 (Shown) 371045 371085

HANGING MEASUREMENTS

		with 4.5" Downrod
А	Fixture Drop from Ceiling	14"
в	Blade Drop from Ceiling	11.25"
С	Housing (Width)	8.75"
D	Ceiling Canopy (Width)	6"




Fixture Drop (A) includes light kit

AIR PERFORMANCE		
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
6200	77	80





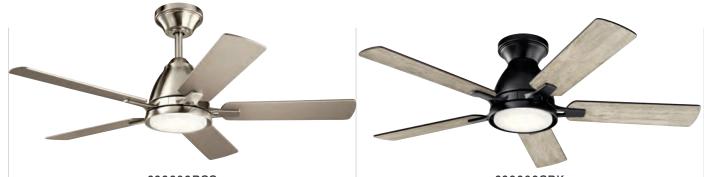


330090BSS Brushed Stainless Steel Finish Silver or Weathered White Blades Frosted White Glass 330090SBK Satin Black Finish Satin Black Blades or Weathered White Walnut Blades Frosted White Glass



Fan Motor Finish

BLADE SPECS

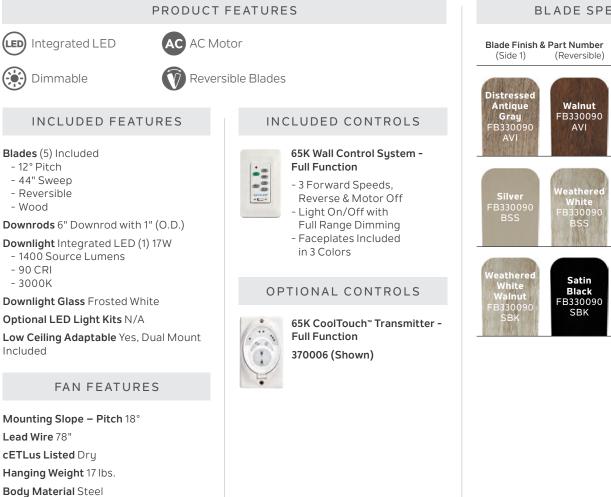


MOTOR FEATURES

Warranty Limited Lifetime

Motor Size/Type 153mm X 12mm, AC Amps 0.42 on High RPM 192 on High

HANGING MEASUREMENTS

		with 6" Downrod	Flush Mount
А	Fixture Drop from Ceiling	15.25"	10.35"
в	Blade Drop from Ceiling	13.5"	8.5"
С	Housing (Width)	7.75"	7.7"
D	Ceiling Canopy (Width)	6.4"	6.4"




Fixture Drop (A) includes light kit

Airflow	AIR PERFORMANCE Power Usage	Airflow Efficiencu
Cubic Ft. Per Minute on High	Watts on High (Excludes Lights)	Cubic Ft. Per Minute Per Watt
3445	52	66





Polycarbonate Lens, with Brushed Nickel Blades






Satin Black Blades Frosted White Polycarbonate Lens


White Blades Frosted White Polycarbonate Lens



Fan Motor Finish

BLADE SPECS



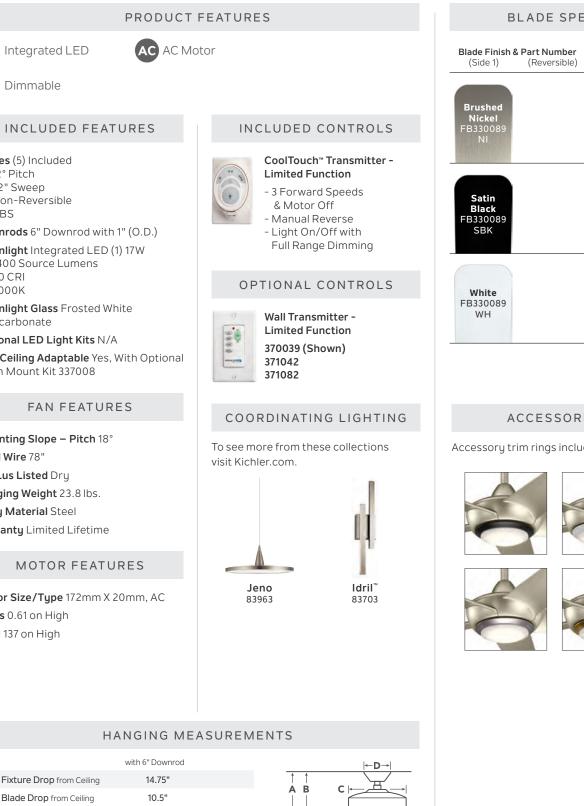

INCLUDED FEATURES

Blades (5) Included

Dimmable

- 12° Pitch
- 52" Sweep
- Non-Reversible
- ABS

(LED)

Downrods 6" Downrod with 1" (O.D.)

Downlight Integrated LED (1) 17W

- 1400 Source Lumens
- 90 CRI
- 3000K

Downlight Glass Frosted White Polycarbonate

Optional LED Light Kits N/A

Low Ceiling Adaptable Yes, With Optional Flush Mount Kit 337008


FAN FEATURES

Mounting Slope – Pitch 18° Lead Wire 78" cETLus Listed Dry Hanging Weight 23.8 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC Amps 0.61 on High RPM 137 on High

		with 6" Down
А	Fixture Drop from Ceiling	14.75"
в	Blade Drop from Ceiling	10.5"
С	Housing (Width)	10.5"
D	Ceiling Canopy (Width)	6.75"



Fixture Drop (A) includes light kit

AIR PERFORMANCE		
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
5620	73	87



ACCESSORIES

Accessory trim rings included.









Shown: 300270SBK Satin Black Finish, White Polycarbonate Lens, with Satin Black Blades





300270WH

White Finish White Blades White Polycarbonate Lens

Fan Motor Finish

BLADE SPECS

Blade Finish & Part Number





Integrated LED (LED) Dimmable

INCLUDED FEATURES

PRODUCT FEATURES

AC AC Motor

Blades (3) Included

- Variable Blade Pitch from 0-15"
- 56" Sweep
- Non-Reversible
- ABS

Downrods 6" Downrod with 1" (O.D.)

Downlight Integrated LED (1) 17W

- 1400 Source Lumens
- 90 CRI
- 3000K

Downlight Glass White Polycarbonate

Optional LED Light Kits N/A

Low Ceiling Adaptable Yes, With Optional Flush Mount Kit 337008

FAN FEATURES

Mounting Slope – Pitch 30° Lead Wire 78" cETLus Listed Dry Hanging Weight 15 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 16mm, AC Amps 0.48 on High RPM 120 on High



Full Function


in 3 Colors

Full Function

370006 (Shown)

HANGING MEASUREMENTS

		with 6" Downrod
А	Fixture Drop from Ceiling	13.75"
В	Blade Drop from Ceiling	12.75"
С	Housing (Width)	9.25"
D	Ceiling Canopy (Width)	6.75"



Fixture Drop (A) includes light kit

AIR PERFORMANCE			
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt	
5277	57	93	




Shown: 310360SBK Satin Black Finish, Frosted White Polycarbonate Lens, with Satin Black Blades

60" Jace™



Walnut Blades Frosted White Polycarbonate Lens

60" Jace[™]

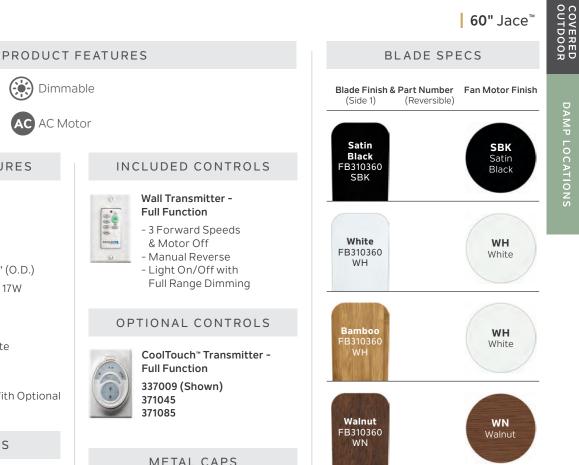

Includes a metal fixture cap for





HANGING MEASUREMENTS

		with 6" Downrod
А	Fixture Drop from Ceiling	15.75"
в	Blade Drop from Ceiling	13"
С	Housing (Width)	9"
D	Ceiling Canopy (Width)	6.75"

(LED) Integrated LED

Damp-rated

Blades (3) Included

- Non-Reversible

- 12° Pitch

- ABS

- 90 CRI

- 3000K

Polycarbonate

Lead Wire 78"

cETLus Listed Damp Hanging Weight 20 lbs. Body Material Steel

Amps 0.6 on High RPM 156 on High

- 60" Sweep

INCLUDED FEATURES

Downrods 6" Downrod with 1" (O.D.)

Downlight Integrated LED (1) 17W - 1400 Source Lumens

Downlight Glass Frosted White

Low Ceiling Adaptable Yes, With Optional

FAN FEATURES

MOTOR FEATURES


Motor Size/Type 188mm X 15mm, AC

Optional LED Light Kits N/A

Mounting Slope – Pitch 30°

Warranty Limited Lifetime

Flush Mount Kit 337008



Fixture Drop (A) includes light kit


	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
5797	72	81



METAL CAPS

non-light use.







Dimmable

AC Motor

ΔC




Shown: 300710PNC Polished Nickel Finish, Crushed Crystal Glass, with Silver or Black Blades





PNC

PN

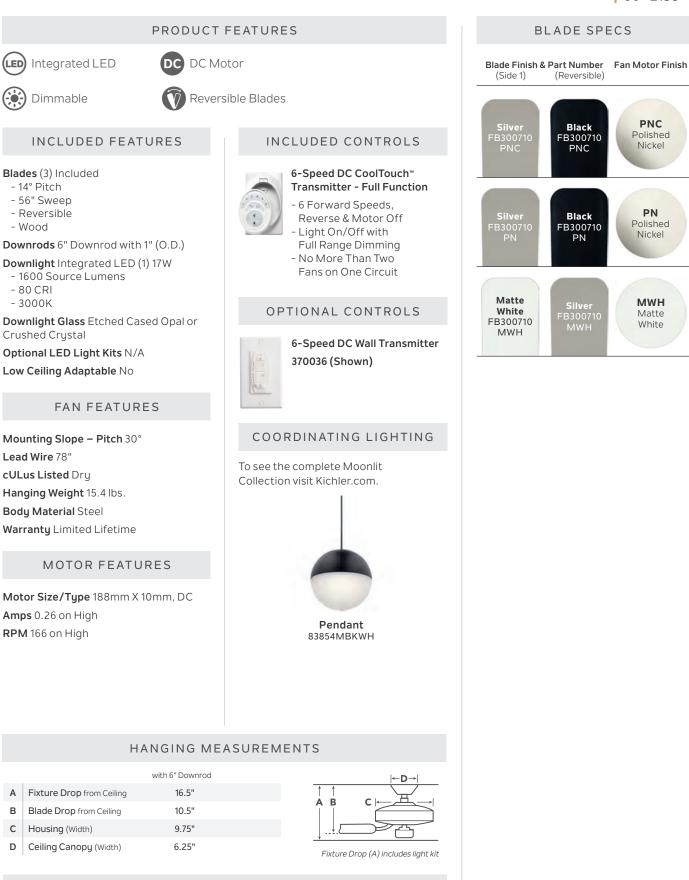

Airflow Efficiency

Cubic Ft. Per Minute Per Watt

285

AIR PERFORMANCE

Power Usage

Watts on High (Excludes Lights)

17

Airflow

Cubic Ft. Per Minute on High


4879

Shown: **330152MWH** Matte White Finish, Etched Cased Opal Glass, with Matte White Blades

54" sola



54" Sola

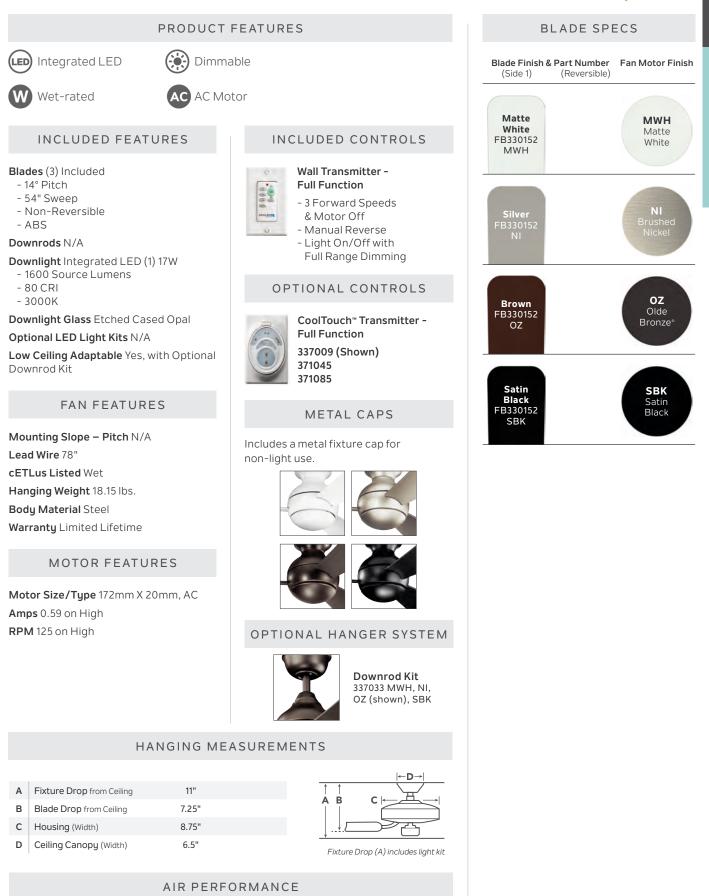

Airflow Efficiency Airflow Power Usage Cubic Ft. Per Minute on High Watts on High (Excludes Lights) Cubic Ft. Per Minute Per Watt 5096 70 73


Shown: **330151MWH** Matte White Finish, Etched Cased Opal Glass, with Matte White Blades





44" Sola

OUTDOOR

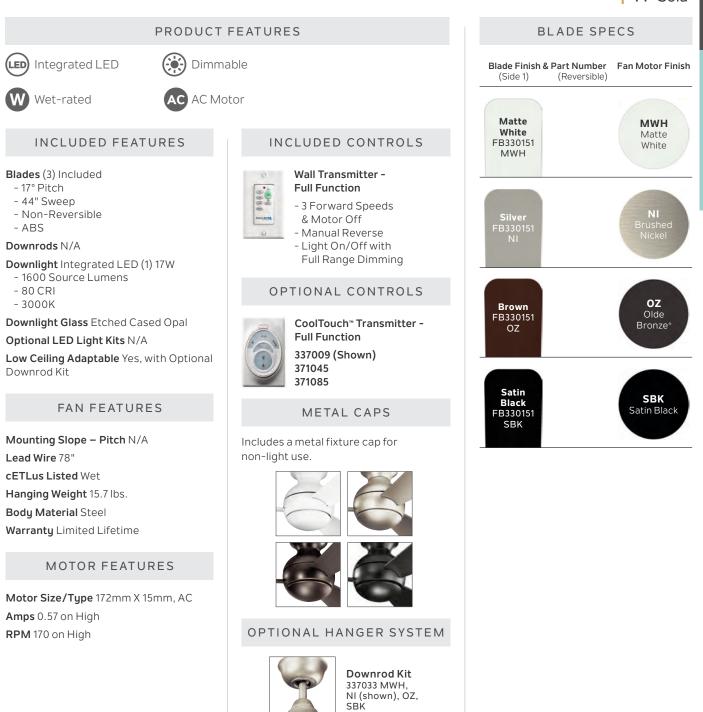

HANGING MEASUREMENTS


А	Fixture Drop from Ceiling	11"
в	Blade Drop from Ceiling	7.25'

Ceiling Canopy (Width)

C Housing (Width)

D


7.25" 8.75" 6.5"




Fixture Drop (A) includes light kit

AIR PERFORMANCE		
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
4298	68	63

Shown: 330150MWH Matte White Finish, Etched Cased Opal Glass, with Matte White Blades





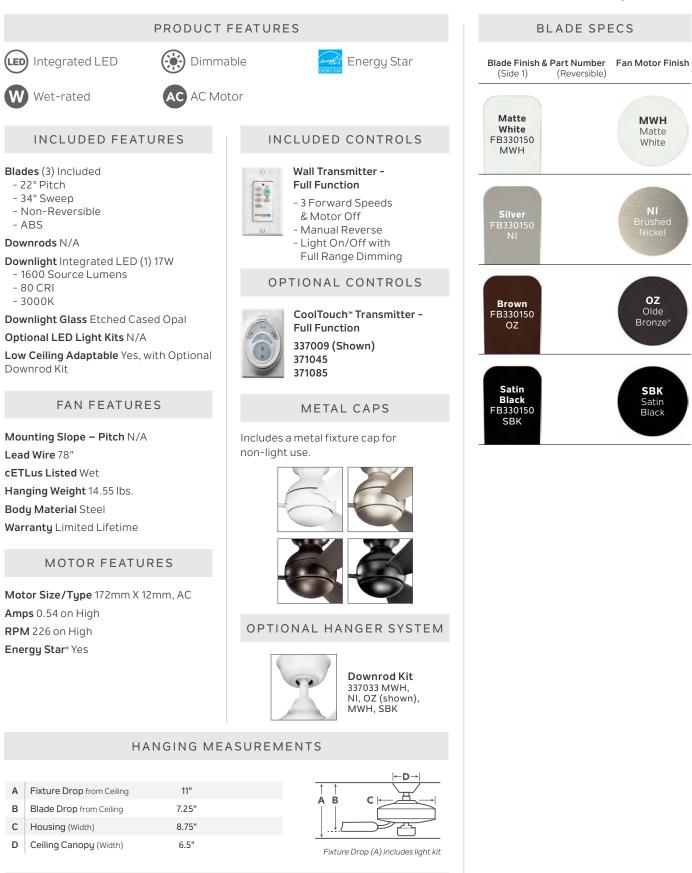

Airflow	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
Cubic Ft. Per Minute on High 3509	65	54

Shown: 300032MWH Matte White Finish, Frosted White Polycarbonate Lens, with Matte White Blades







300032NI Brushed Nickel Finish Distressed Antique Gray Blades Frosted White Polycarbonate Lens 300032SBK Satin Black Finish Satin Black Blades Frosted White Polycarbonate Lens



300032SNB Satin Natural Bronze Finish Walnut Blades Frosted White Polycarbonate Lens





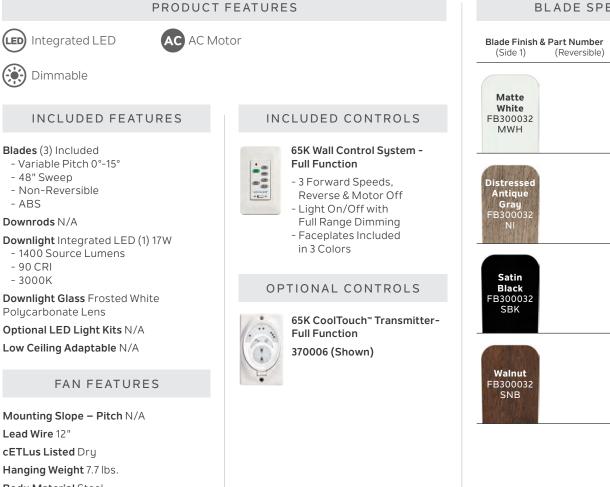

Body Material Steel Warranty Limited Lifetime

- ABS

- 90 CRI

- 3000K

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC Amps 0.48 on High RPM 226 on High


HANGING MEASUREMENTS

А	Fixture Drop from Ceiling
в	Blade Drop from Ceiling
С	Housing (Width)

Ceiling Canopy (Width)

D





Fixture Drop (A) includes light kit

Airflow	Power Usage	Airflow Efficiency
Cubic Ft. Per Minute on High	Watts on High (Excludes Lights)	Cubic Ft. Per Minute Per Watt



Kichler.com 185



Shown: 300168NI Brushed Nickel Finish with Silver Blades

54" Link™



BLADE SPECS



DC Motor

INCLUDED FEATURES

Blades (2) Included

- 28° Pitch
- 54" Sweep
- non-Reversible
- ABS

Downrods N/A Optional LED Light Kits N/A Low Ceiling Adaptable No

FAN FEATURES

Mounting Slope – Pitch Flat Ceilings Only Lead Wire 8" cETLus Listed Dry Hanging Weight 18.7 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC-125 Amps 0.54 on High RPM 132 on High Energy Star[®] Yes



PRODUCT FEATURES

INCLUDED CONTROLS

6-Speed DC CoolTouch[™] Transmitter - Full Function


- 6 Forward Speeds, Reverse & Motor Off
 Light On/Off with Full Range Dimming
- More Than Two Fans on One Circuit
- OPTIONAL CONTROLS



6-Speed DC Wall Transmitter 370036 (Shown)

HANGING MEASUREMENTS

А	Fixture Drop from Ceiling	24.25"
в	Blade Drop from Ceiling	24.25"
С	Housing (Width)	7.9"
D	Ceiling Canopy (Width)	8"



Fixture Drop (A) includes light kit

AIR PERFORMANCE		
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
5780	31	184

INDOOR







60" Ferron™







DC DC Motor Energy Star

INCLUDED FEATURES

Blades (2) Included

- 14° Pitch
- 60" Sweep
- Non-Reversible
- Polycarbonate

Downrods 6" Downrod with 1" (O.D.)

Optional LED Light Kits N/A Low Ceiling Adaptable No

FAN FEATURES

Mounting Slope – Pitch 30° Lead Wire 78" cETLus Listed Dry Hanging Weight 16.7 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC-125 Amps 0.54 on High RPM 112 on High Energy Star[®] Yes



PRODUCT FEATURES

6-Speed DC CoolTouch[™] Transmitter - Full Function

- 6 Forward Speeds,

- Reverse & Motor Off Light On/Off with Full Range Dimming
- No More Than Two Fans
- on One Circuit

OPTIONAL CONTROLS




6-Speed DC Wall Transmitter 370036 (Shown)

HANGING MEASUREMENTS

		with 6" Downrod
А	Fixture Drop from Ceiling	7.25"
в	Blade Drop from Ceiling	15.37"
С	Housing (Width)	7.25"
D	Ceiling Canopy (Width)	6"





Fixture Drop (A) includes light kit

Airflow	Power Usage	Airflow Efficiency
Cubic Ft. Per Minute on High V	Natts on High (Excludes Lights)	Cubic Ft. Per Minute Per Watt



Shown: 300230NI Brushed Nickel Finish, Etched Cased Opal Glass, with Champagne Blades






3002300BB Oil Brushed Bronze[∞] Finish Oil Brushed Bronze[∞] Blades Etched Cased Opal Glass



300230WH White Finish White Blades Etched Cased Opal Glass

NI



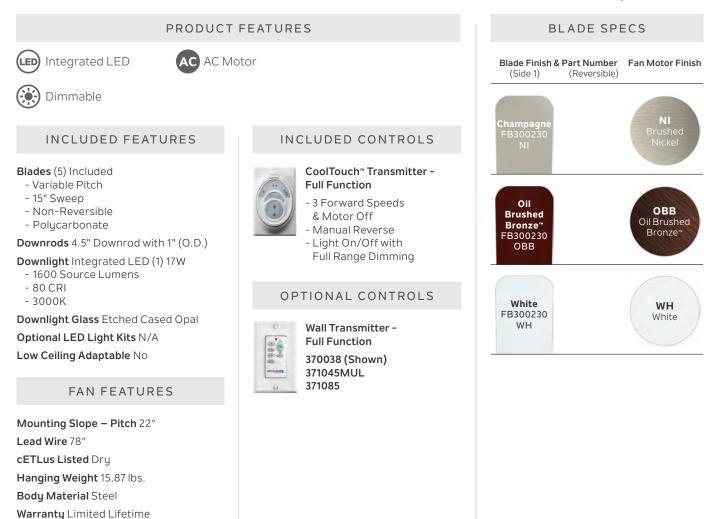


MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC Amps 0.25 on High RPM 318 on High

HANGING MEASUREMENTS


		with 4.5" Downrod
А	Fixture Drop from Ceiling	20"
в	Blade Drop from Ceiling	19.25"
С	Housing (Width)	10.5"
D	Ceiling Canopy (Width)	6.25"



Fixture Drop (A) includes light kit

Airflow	Power Usage	Airflow Efficiency
Cubic Ft. Per Minute on High	Watts on High (Excludes Lights)	Cubic Ft. Per Minute Per Watt
359	32	11

AIR PERFORMANCE



Terna[™]'s contoured blade design produces a unique outward airflow pattern to cool a wider area.



Shown: 310017AVI Anvil Iron Finish, Fresnel Lens Glass, with Walnut or Distressed Antique Gray Blades

60" Hatteras Bay™



310017DBK Distressed Black Finish Walnut or Cherry Blades Fresnel Lens Glass (Shown as Flush Mount Installation)



310017WZC Weathered Zinc Finish Medium Walnut or Dark Walnut Blades Fresnel Lens Glass (Shown as Flush Mount Installation)

BLADE SPECS





PRODUCT FEATURES (LED) Integrated LED Dimmable Damp-rated AC Motor INCLUDED FEATURES INCLUDED CONTROLS Blades (5) Included

- 12° Pitch
- 60" Sweep
- Reversible
- ABS

Downrods 12" Downrod with 1" (O.D.)

Downlight Integrated LED (1) 23W

- 2200 Source Lumens
- 90 CRI
- 3000K

Downlight Glass Fresnel Lens

Optional LED Light Kits N/A

Low Ceiling Adaptable Yes, Dual Mount Included

FAN FEATURES

Mounting Slope – Pitch 22° Lead Wire 78" cULus Listed Damp Hanging Weight 32.5 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC Amps 0.6 on High RPM 157 on High



CoolTouch[™] Transmitter -**Full Function**

Wall Transmitter -

- 3 Forward Speeds

- Manual Reverse

- Light On/Off with Full Range Dimming

OPTIONAL CONTROLS

Full Function


& Motor Off

337009 (Shown) 371045 371085

Reversible Blades

HANGING MEASUREMENTS

		with 12" Downrod	Flush Mount
А	Fixture Drop from Ceiling	22.5"	16.5"
в	Blade Drop from Ceiling	18.5"	12.5"
С	Housing (Width)	15.25"	15.25
D	Ceiling Canopy (Width)	6.75"	6.75



Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow	Power Usage	Airflow Efficiency
Cubic Ft. Per Minute on High	Watts on High (Excludes Lights)	Cubic Ft. Per Minute Per Watt
6282	71	88



310018AVI Anvil Iron Finish, Fresnel Lens Glass, with Walnut or Distressed Antique Gray Blades

52" Hatteras Bay™



310018DBK Distressed Black Finish Walnut or Cherry Blades Fresnel Lens Glass



310018WZC Weathered Zinc Finish Medium Walnut or Dark Walnut Blades Fresnel Lens Glass

Fan Motor Finish

AVI

Anvil Iron

DBK

Distressed

Black

WZC

Weathered

PRODUCT FEATURES (LED) Integrated LED **Reversible Blades** Dimmable Blade Finish & Part Number (Side 1) Damp-rated AC Motor Walnut INCLUDED FEATURES INCLUDED CONTROLS Blades (5) Included Wall Transmitter -- 14° Pitch **Full Function** - 52" Sweep - 3 Forward Speeds - Reversible & Motor Off - ABS - Manual Reverse **Downrods** 12" Downrod with 1" (O.D.) - Light On/Off with Full Range Dimming Downlight Integrated LED (1) 23W - 2200 Source Lumens - 90 CRI OPTIONAL CONTROLS - 3000K Downlight Glass Fresnel Lens CoolTouch[™] Transmitter -Optional LED Light Kits N/A **Full Function** Low Ceiling Adaptable Yes, Dual Mount 337009 (Shown) Included 371045 371085 FAN FEATURES

Distressed Antique Gray FB310018 AVI FB310018 Cherry FB310018 Walnut FB310018 DBK DBK Medium Dark Walnut FB310018 WZC Walnut FB310018 WZC

BLADE SPECS

(Reversible)


Mounting Slope – Pitch 22° Lead Wire 78" cULus Listed Damp Hanging Weight 33 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC Amps 0.69 on High RPM 146 on High

HANGING MEASUREMENTS

		with 12" Downrod	Flush Mount
А	Fixture Drop from Ceiling	22.5"	16.5"
в	Blade Drop from Ceiling	18.5"	12.5"
С	Housing (Width)	15.25"	15.25
D	Ceiling Canopy (Width)	6.75"	6.75



Fixture Drop (A) includes light kit


	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
6124	82	75




Shown:

 $\ensuremath{\textbf{330140NI}}$ Brushed Nickel Finish, Etched Cased Opal Glass, with Walnut or Silver Blades



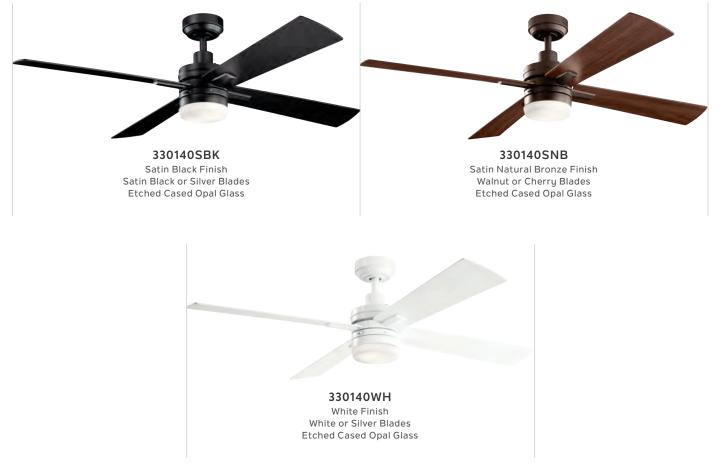

INDOOR

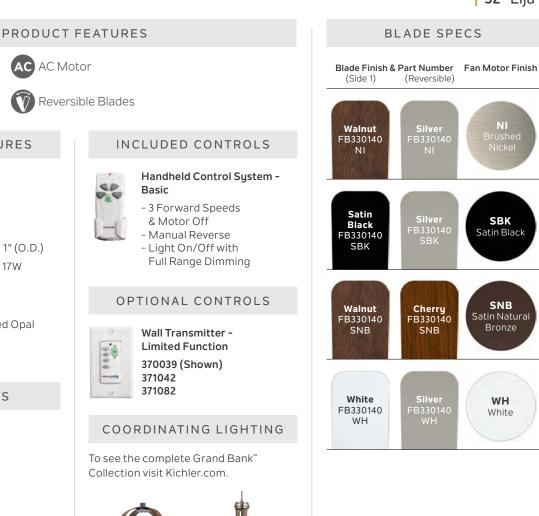

To see the complete Grand Bank[™] Collection visit Kichler.com.



Grand Bank[™] 59067AUB



Grand Bank" 43193DAG

HANGING MEASUREMENTS

		with 4.5" Downrod
А	Fixture Drop from Ceiling	14.25"
В	Blade Drop from Ceiling	10"
С	Housing (Width)	6.75"
D	Ceiling Canopy (Width)	5.75"

(LED) Integrated LED

Dimmable

Blades (4) Included

- 12° Pitch

- 52" Sweep

- Reversible

- Plywood

- 90 CRI

- 3000K

Lead Wire 78"

cULus Listed Dry

Amps 0.51 on High

RPM 175 on High

Hanging Weight 22 lbs. Body Material Steel Warranty Limited Lifetime

INCLUDED FEATURES

Downrods 4.5" Downrod with 1" (O.D.)

Downlight Integrated LED (1) 17W - 1400 Source Lumens

Downlight Glass Etched Cased Opal

FAN FEATURES

MOTOR FEATURES

Motor Size/Type 172mm X 17mm, AC

Optional LED Light Kits N/A


Low Ceiling Adaptable No

Mounting Slope – Pitch 22°

AC AC Motor

Reversible Blades






Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
5093	61	83










60" Ahrendale[™]

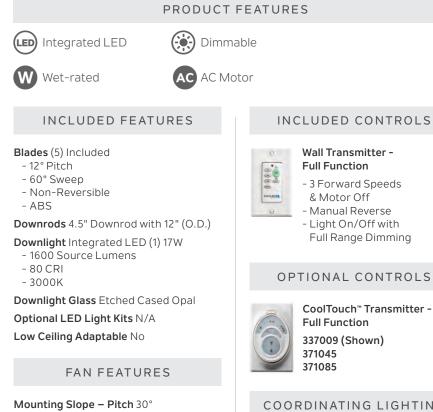

Lead Wire 78" cETLus Listed Wet Hanging Weight 34 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 20mm, AC Amps 0.6 on High RPM 145 on High

INCLUDED CONTROLS

- 3 Forward Speeds
 - & Motor Off - Manual Reverse - Light On/Off with
 - Full Range Dimming

OPTIONAL CONTROLS

Full Function 337009 (Shown)

COORDINATING LIGHTING

To see the complete Ahrendale[™] Collection visit Kichler.com.




Mini Pendant 43584AVI



43582AVI

HANGING MEASUREMENTS

		with 4.5" Downrod
А	Fixture Drop from Ceiling	16.5"
в	Blade Drop from Ceiling	9.75"
С	Housing (Width)	11.75"
D	Ceiling Canopy (Width)	6.75"



Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
5763	72	80

Blade Finish & Part Number Fan Motor Finish (Side 1) (Reversible)

BLADE SPECS



OUTDOOR

Shown: 300352NI Brushed Nickel Finish, Etched Opal Glass, with Driftwood Blades

52" Chiara



BLADE SPECS



AC AC Motor (LED) Integrated LED Dimmable INCLUDED FEATURES Blades (3) Included

PRODUCT FEATURES

- 12° Pitch - 52" Sweep
- Non-Reversible
- Wood

Downrods N/A

- Downlight Integrated LED (1) 17W - 1600 Source Lumens
- 80 CRI
- 3000K

Downlight Glass Etched Cased Opal

Optional LED Light Kits N/A


Low Ceiling Adaptable N/A

FAN FEATURES

Mounting Slope – Pitch N/A Lead Wire 8" cETLus Listed Dry Hanging Weight 18.75 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 20mm, AC Amps 0.45 on High RPM 189 on High



65K Wall Control System -**Limited Function**

- 3 Forwards Speeds
- & Motor Off
- Manual Reverse - Light On/Off with
- Full Range Dimming - Faceplates Included in
- 3 Colors

OPTIONAL CONTROLS



65K CoolTouch[™] Transmitter -Limited Function 370005 (Shown)

COORDINATING LIGHTING

To see more from these collections visit Kichler.com.



Aldean" 82266



Fiona 42495OZ


HANGING MEASUREMENTS

A Fixture Drop from Ceiling в Blade Drop from Ceiling С Housing (Width)

Ceiling Canopy (Width)

D

10.5" 7.5" 7" 7"



Fixture Drop (A) includes light kit

		79
Cubic Ft. Per Minute on High	Watts on High (Excludes Lights)	Cubic Ft. Per Minute Per Watt
Airflow	Power Usage	Airflow Efficiency

INDOOR

Shown: 300253AVI Anvil Iron Finish, Clear Polycarbonate Glass, with Distressed Antique Gray Blades

60" Pinion



BLADE SPECS

Blade Finish & Part Number Fan Motor Finish (Reversible) (Side 1)



PRODUCT FEATURES



INCLUDED FEATURES

Blades (3) Included

- 16° Pitch
- 60" Sweep
- Non-Reversible
- Wood

Downrods 4.5" Downrod with 1" (O.D.)

Glass Clear Polycarbonate

Optional LED Light Kits See Pages 282-286 Low Ceiling Adaptable No

FAN FEATURES

Mounting Slope – Pitch 22° Lead Wire 78" cETLus Listed Dry Hanging Weight 24 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC Amps 0.66 on High RPM 156 on High

INCLUDED CONTROLS

65K Wall Control System -**Full Function**

- 3 Forward Speeds,
- Reverse & Motor Off - Light On/Off with
- Full Range Dimming - Faceplates Included in
- 3 Colors

OPTIONAL CONTROLS




65K CoolTouch[™] Transmitter -**Full Function** 370006 (Shown)

HANGING MEASUREMENTS

		with 4.5" Downrod
А	Fixture Drop from Ceiling	15.5"
в	Blade Drop from Ceiling	12.25"
С	Housing (Width)	11.75"
D	Ceiling Canopy (Width)	5.87"





Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
6245	79	79

INDOOR




65" Eads™ Patio XL



BLADE SPECS

Fan Motor Finish (Reversible) οz Olde Bronze® WZC Weathered



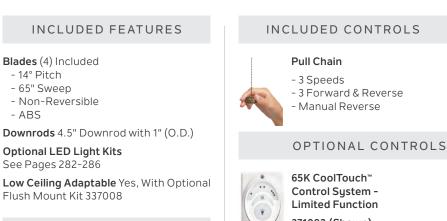

PRODUCT FEATURES

Wet-rated

AC Motor

Blades (4) Included

- Non-Reversible

Optional LED Light Kits See Pages 282-286

Flush Mount Kit 337008

Mounting Slope – Pitch 30°

Hanging Weight 33.95 lbs.

Body Material Steel Warranty Limited Lifetime

Amps 0.87 on High

RPM 139 on High

Lead Wire 78" cETLus Listed Wet

FAN FEATURES

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC

- 14° Pitch

- ABS

- 65" Sweep

65K CoolTouch™ Control System -Limited Function 371082 (Shown) 371042 337001

COORDINATING LIGHTING

Collection visit Kichler.com.



Wall Light 49864WZC




Post Light 49869WZC

HANGING MEASUREMENTS

		with 4.5" Downrod
А	Fixture Drop from Ceiling	14"
в	Blade Drop from Ceiling	11"
С	Housing (Width)	11"
D	Ceiling Canopy (Width)	7.25"





Fixture Drop (A) includes light kit

on High (Excludes Lights)	Cubic Ft. Per Minute Per Watt
	on High (Excludes Lights)





To see the complete Andover






52" Eads[™] Patio



52" Eads[™] Patio

OUTDOOR





INCLUDED FEATURES INCLUDED CONTROLS Pull Chain - 3 Speeds - 3 Forward & Reverse - Manual Reverse Downrods 4.5" Downrod with 1" (O.D.) OPTIONAL CONTROLS **Optional LED Light Kits** See Pages 282-286 65K Wall Control System -Low Ceiling Adaptable Yes, With Optional **Limited Function** Flush Mount Kit 337008 9 8 371042 (Shown) 371082 FAN FEATURES 371082 Mounting Slope – Pitch 30° COORDINATING LIGHTING To see the complete Andover Collection visit Kichler.com. Hanging Weight 25 lbs. Body Material Steel Warranty Limited Lifetime

PRODUCT FEATURES

MOTOR FEATURES

Motor Size/Type 172mm X 17mm, AC Amps 0.66 on High RPM 201 on High

Wet-rated

AC Motor

Blades (4) Included

- Non-Reversible

- 14° Pitch

Lead Wire 78"

cETLus Listed Wet

- ABS

- 52" Sweep



Wall Light 49864WZC




Post Light 49869WZC

HANGING MEASUREMENTS

		with 4.5" Downrod
А	Fixture Drop from Ceiling	14"
в	Blade Drop from Ceiling	11"
С	Housing (Width)	11"
D	Ceiling Canopy (Width)	7.25"






Fixture Drop (A) includes light kit

AIR PERFORMANCE		
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
5904	78	76

Shown: **300275AVI** Anvil Iron Finish, Etched Cased Opal Glass, with Distressed Antique Gray Blades



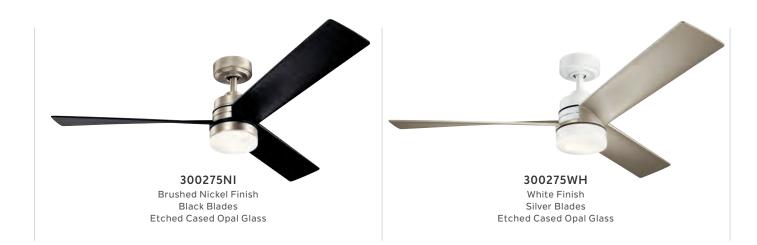

52" Spyn PRODUCT FEATURES **BLADE SPECS** (LED) Integrated LED AC AC Motor Blade Finish & Part Number Fan Motor Finish (Side 1) (Reversible) Dimmable Distressed Antique Gray FB300275 AVI AVI INCLUDED FEATURES INCLUDED CONTROLS Anvil Iron Blades (3) Included Fan/Light Dual-Slide Control - 13° Pitch - Fan Speed & Light Control - 52" Sweep - Controls 1 Fan & Light - Non-Reversible Black - Full-Range Dimming FB300275 NI Brushe Nicke Light Control **Downrods** 6" Downrod with 1" (O.D.) Downlight Integrated LED (1) 17W OPTIONAL CONTROLS - 1600 Source Lumens 65K Wall Control System -**Silver** FB300275 WH WH Limited Function White Downlight Glass Etched Cased Opal 371042 (Shown) Optional LED Light Kits N/A 371082 Low Ceiling Adaptable No FAN FEATURES COORDINATING LIGHTING Mounting Slope – Pitch 22° To see more from these collections Lead Wire 78" visit Kichler.com. cETLus Listed Dry Hanging Weight 13.54 lbs. Body Material Steel Warranty Limited Lifetime MOTOR FEATURES Crosby Grand Bank" 43996NĬ 43189DAG Motor Size/Type 153mm X 17mm, AC Amps 0.53 on High RPM 162 on High **Roswell** 43304NI HANGING MEASUREMENTS hd

		with 6" Downroo
А	Fixture Drop from Ceiling	14.5"
в	Blade Drop from Ceiling	9"
С	Housing (Width)	7"
D	Ceiling Canopy (Width)	6"

- ABS

- 80 CRI - 3000K


Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
5056	63	80

INDOOR

С B Α

Shown: **330002NI** Brushed Nickel Finish, Etched Cased Opal Glass, with Silver or Walnut Blades






330002SBK Satin Black Finish Silver or Black Blades Etched Cased Opal Glass



330002WH White Finish White or Silver Blades Etched Cased Opal Glass

52" Vassar™



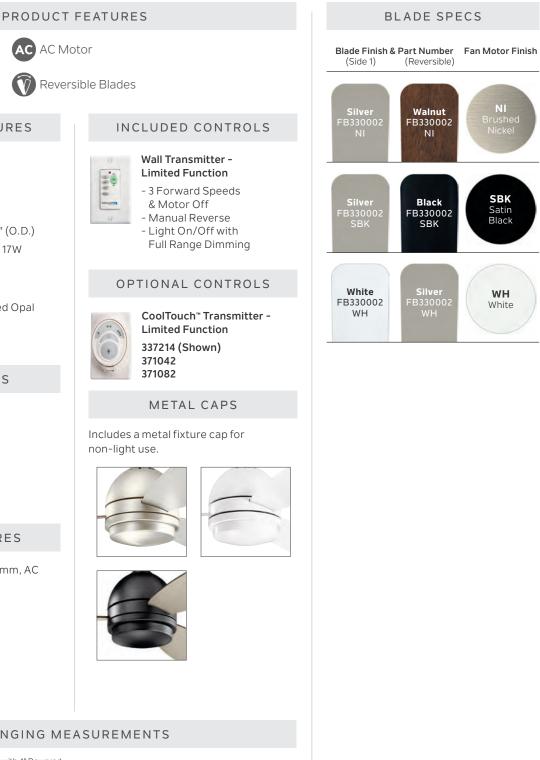

INCLUDED FEATURES Blades (3) Included - 14° Pitch - 52" Sweep - Reversible - Wood **Downrods** 4" Downrod with 1" (O.D.) Downlight Integrated LED (1) 17W - 1600 Source Lumens - 80 CRI - 3000K Downlight Glass Etched Cased Opal Optional LED Light Kits N/A Low Ceiling Adaptable No FAN FEATURES Mounting Slope – Pitch 18° Lead Wire 78" cULus Listed Dry Hanging Weight 17.2 lbs. Body Material Steel Warranty Limited Lifetime MOTOR FEATURES


(LED) Integrated LED

Dimmable

Motor Size/Type 153mm X 17mm, AC Amps 0.52 on High RPM 182 on High

HANGING MEASUREMENTS

		with 4" Downrod
А	Fixture Drop from Ceiling	14.5"
в	Blade Drop from Ceiling	11"
С	Housing (Width)	8.75"
D	Ceiling Canopy (Width)	5.25"



Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
4811	59	81

INDOOR



330001BSS Brushed Stainless Steel Finish, Etched Cased Opal Glass, with Silver or Walnut Blades





MWH

Matte

White

οz

Olde

Bronze®


SBK

Satin

Black



INDOOR

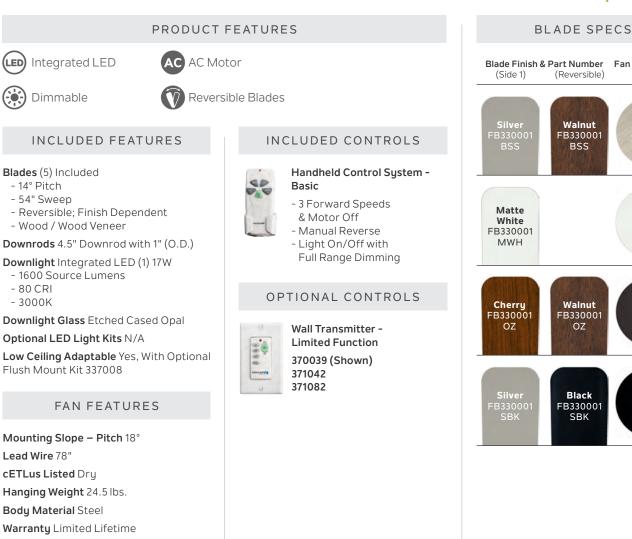


MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC Amps 0.65 on High RPM 160 on High

HANGING MEASUREMENTS

		with 4.5" Downrod
А	Fixture Drop from Ceiling	14.25"
в	Blade Drop from Ceiling	10.5"
С	Housing (Width)	11"
D	Ceiling Canopy (Width)	5.25"





Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
5650	77	73



Shown:

330347BAP Burnished Antique Pewter Finish, White Etched Glass, with Dark Cherry or Weathered White Walnut Blades

52" Terra Select



Anna Pa

52" Terra Select

Fan Motor Finish

BAP

Burnished Antique Pewter

MWH

Matte

White


NI Brushec Nickel

OBB

Oil Brushed

Bronze™



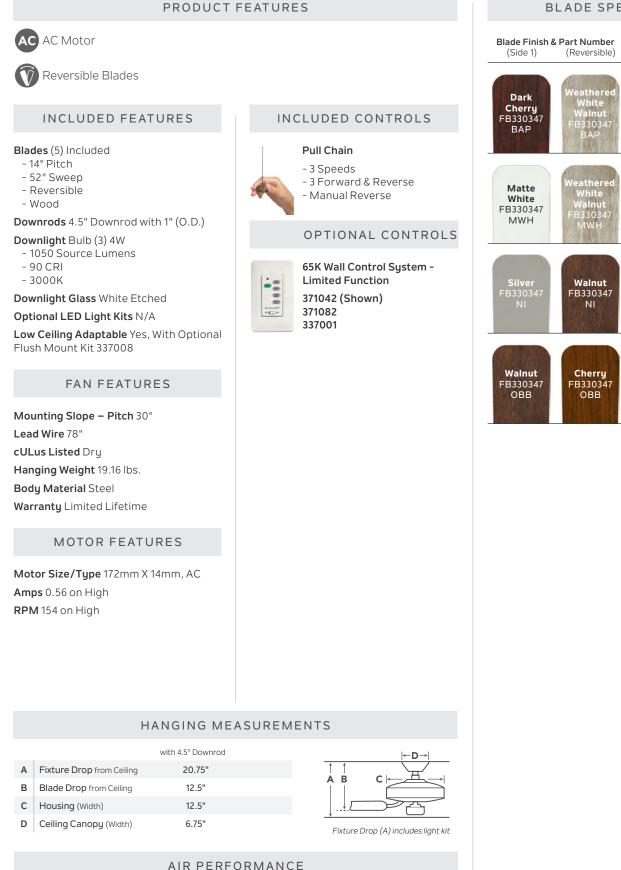

Airflow

Cubic Ft. Per Minute on High

4972

Power Usage

Watts on High (Excludes Lights)

66

Airflow Efficiency

Cubic Ft. Per Minute Per Watt

75








52" Terra

INDOOR

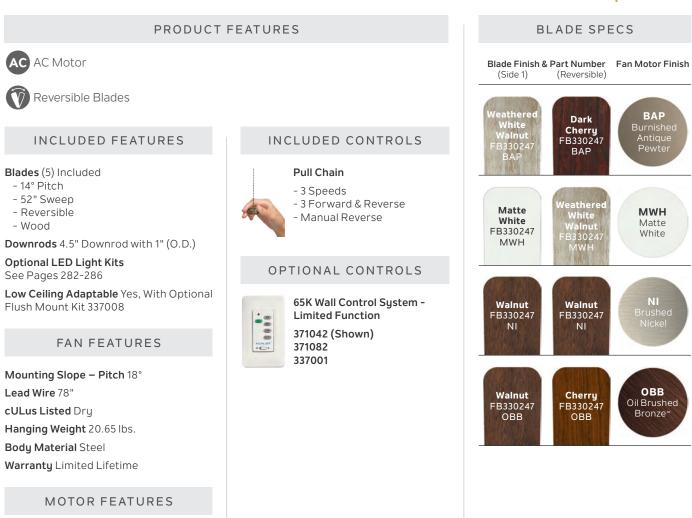


Motor Size/Type 172mm X 14mm, AC Amps 0.6 on High RPM 161 on High



		with 4.5" Downrod
А	Fixture Drop from Ceiling	13.75"
в	Blade Drop from Ceiling	11.75"
С	Housing (Width)	12.5"
D	Ceiling Canopy (Width)	6.75"





Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
4593	71	65




60" Motu™



The Motu[™] fan blades must be mounted a minimum of 10' from the floor. Ideal for commercial use.

BLADE SPECS



PRODUCT FEATURES

AC AC Motor

INCLUDED FEATURES

Blades (3) Included

- 35° Pitch
- 60" Sweep
- Non-Reversible
- ABS

Downrods 6" Downrod with 1" (O.D.) Optional LED Light Kits N/A Low Ceiling Adaptable No

FAN FEATURES

Mounting Slope – Pitch 30° Lead Wire 78" cULus Listed Dry Hanging Weight 24 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC Amps 0.86 on High RPM 261 on High



SLIDE CONTROL

INCLUDED CONTROLS

- 4-Speed Fan Control

- Faceplate Included - Controls One Fan

4-SPEED FAN

- For Use with Most
 - **Ceiling Fans**

OPTIONAL CONTROLS




4-SPEED WALL CONTROL - ROTARY 370040 (Shown) 370032

HANGING MEASUREMENTS

		with 6" Downrod
А	Fixture Drop from Ceiling	14.5"
в	Blade Drop from Ceiling	14.5"
С	Housing (Width)	8.75"
D	Ceiling Canopy (Width)	5.75"






Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
10253	100	103

INDOOR


Shown: 330025BSS Brushed Stainless Steel Finish with Brushed Stainless Steel Blades



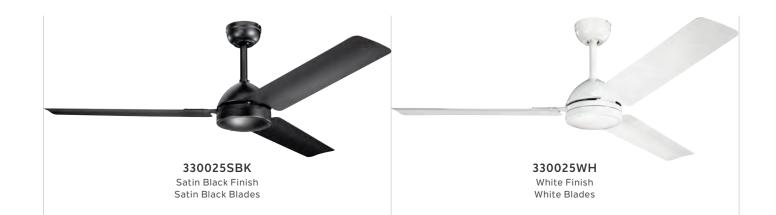

The Todo[™] fan blades must be mounted a minimum of 10' from the floor. Ideal for commercial use.







PRODUCT FEATURES AC AC Motor

INCLUDED FEATURES

Blades (3) Included

- 6.5° Pitch
- 56" Sweep
- Non-Reversible
- Steel

Downrods 8" Downrod with 1" (O.D.)

Optional LED Light Kits N/A Low Ceiling Adaptable No

FAN FEATURES

Mounting Slope – Pitch 30° Lead Wire 78" cULus Listed Dry Hanging Weight 18.3 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 20mm, AC Amps 0.79 on High RPM 267 on High



SLIDE CONTROL - 4-Speed Fan Control

4-SPEED FAN

INCLUDED CONTROLS

- Faceplate Included

- Controls One Fan
- For Use with Most
 - **Ceiling Fans**

OPTIONAL CONTROLS




4-SPEED WALL CONTROL - ROTARY 370040 (Shown) 370032

Blade Finish & Part Number Fan Motor Finish (Reversible) (Side 1) Brushed Stainless Steel FB330025 BSS Satin Black FB330025 SBK Satin Black SBK White WH FB330025 White WΗ

HANGING MEASUREMENTS

		with 4.5" Downrod
А	Fixture Drop from Ceiling	15"
в	Blade Drop from Ceiling	12.25"
С	Housing (Width)	7.5"
D	Ceiling Canopy (Width)	5.25"






Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
8666	91	95

Shown:

 $300031BSS\,$ Brushed Stainless Steel Finish, Frosted White Polycarbonate Lens, with Black or Silver Blades







Satin Natural Bronze Finish Walnut or Cherry Blades Frosted White Polycarbonate Lens







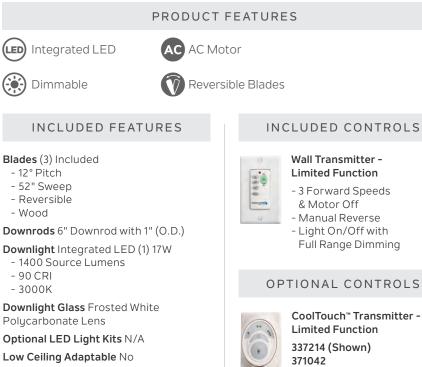

FAN FEATURES


Mounting Slope – Pitch 18° Lead Wire 78" cETLus Listed Dry Hanging Weight 14.75 lbs. Body Material Steel Warranty Limited Lifetime


MOTOR FEATURES

Motor Size/Type 172mm X 14mm, AC Amps 0.6 on High RPM 207 on High

HANGING MEASUREMENTS

		with 6" Downrod
А	Fixture Drop from Ceiling	15"
в	Blade Drop from Ceiling	12.5"
С	Housing (Width)	7.5"
D	Ceiling Canopy (Width)	6"





Fixture Drop (A) includes light kit

Cubic Ft. Per Minute on High Watts on High (Excludes Lights) Cubic Ft. Per Minute Per	n cy Per Watt
---	-------------------------

INDOOR

(Side 1)

Black FB300031

BSS

Matte

White

FB300031

MWH

- Manual Reverse

Full Range Dimming

OPTIONAL CONTROLS




371082




330180NBR Natural Brass Finish, Etched Cased Opal Glass, with Medium Cherry or Dark Cherry Blades

Starkk™

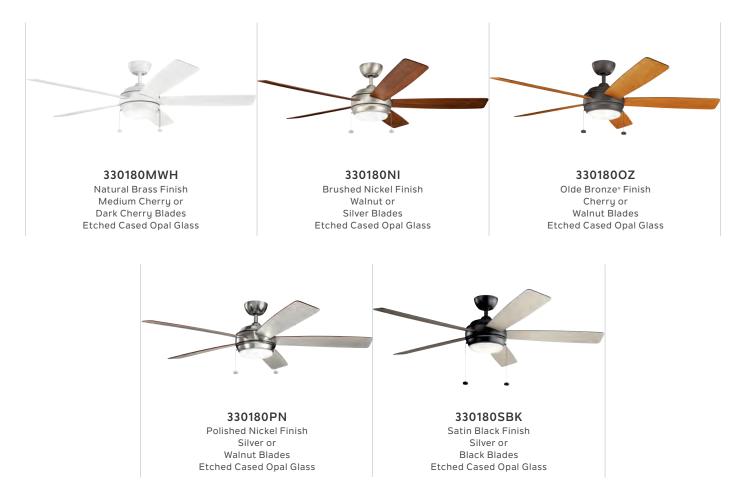



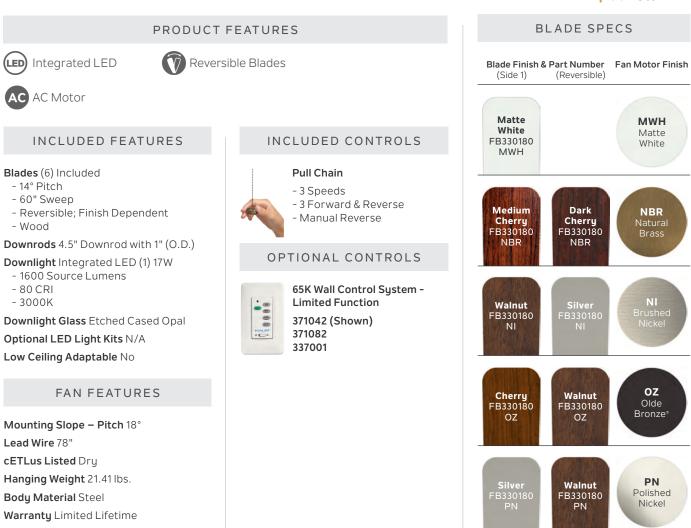


MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC Amps 0.64 on High RPM 109 on High

HANGING MEASUREMENTS

		with 4.5" Downrod
А	Fixture Drop from Ceiling	14.25"
в	Blade Drop from Ceiling	9.75"
С	Housing (Width)	10.5"
D	Ceiling Canopy (Width)	6.25"



Fixture Drop (A) includes light kit

AIR PERFORMANCE		
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
5329	75	71

SBK

Satin Black

Black FB330180


SBK

Silver FB330180 SBK

Kichler.com 225



52" Starkk™

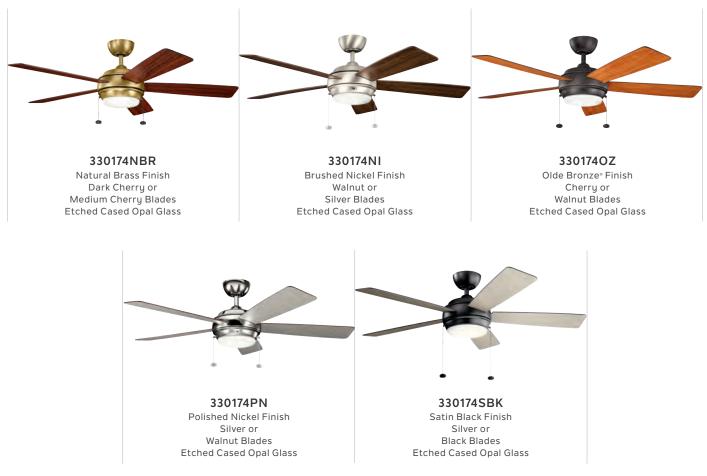



Fan Motor Finish

MWH

Matte

White

NBR

Brass

NI Brushec Nickel

οz

Olde

Bronze®

PN

Polished

Nickel

SBK

Satin

Black


PN

Black

FB330174

SBK

Silver FB330174 SBK

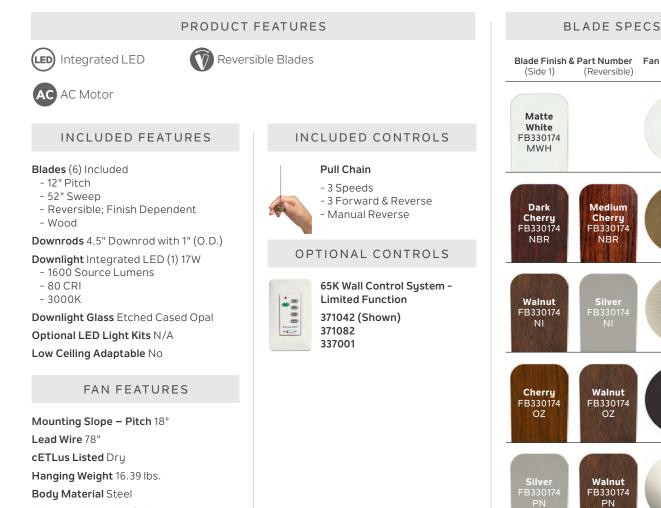

HANGING MEASUREMENTS

		with 4.5" Downrod
А	Fixture Drop from Ceiling	13.75"
в	Blade Drop from Ceiling	9.5"
С	Housing (Width)	10.5"
D	Ceiling Canopy (Width)	5.25"


Warranty Limited Lifetime

Amps 0.49 on High RPM 154 on High

MOTOR FEATURES

Motor Size/Type 153mm X 17mm, AC





Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
4594	58	79



330171MWH Natural Brass Finish, Etched Cased Opal Glass, with Medium Cherry or Dark Cherry Blades

Starkk™



330171PN Polished Nickel Finish Silver or Walnut Blades Etched Cased Opal Glass

330171SBK Satin Black Finish Black or Silver Blades Etched Cased Opal Glass 330171OZ


Olde Bronze® Finish

Walnut or

Cherry Blades

Etched Cased Opal Glass




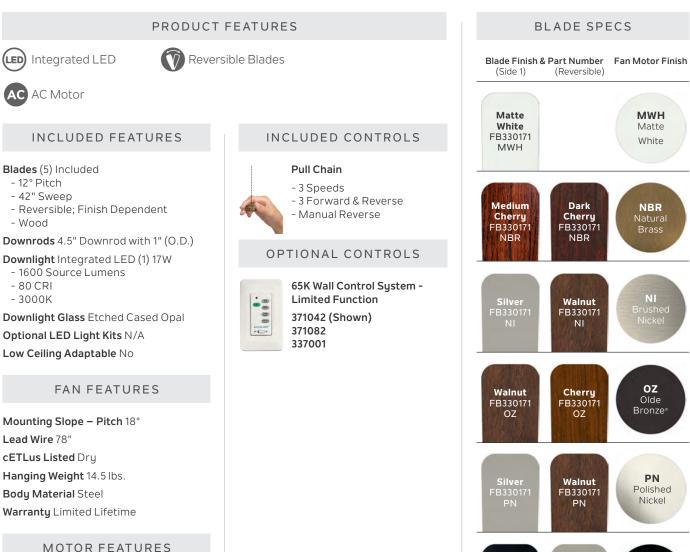

Motor Size/Type 153mm X 12mm, AC Amps 0.43 on High RPM 222 on High

HANGING MEASUREMENTS

AFixture Drop from Ceiling13.75"BBlade Drop from Ceiling9.75"CHousing (Width)10.5"DCeiling Canopy (Width)5.25"



Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
3746	52	72

INDOOR

SBK

Satin

Black

Silver FB330171 SBK

Black

FB330171


SBK



300026BSS Brushed Stainless Steel Finish, Cased Opal Glass, with Medium Oak or Dark Oak Blades

$52^{\prime\prime} \; \text{Canfield}^{\scriptscriptstyle \rm M} \; \text{Select}$



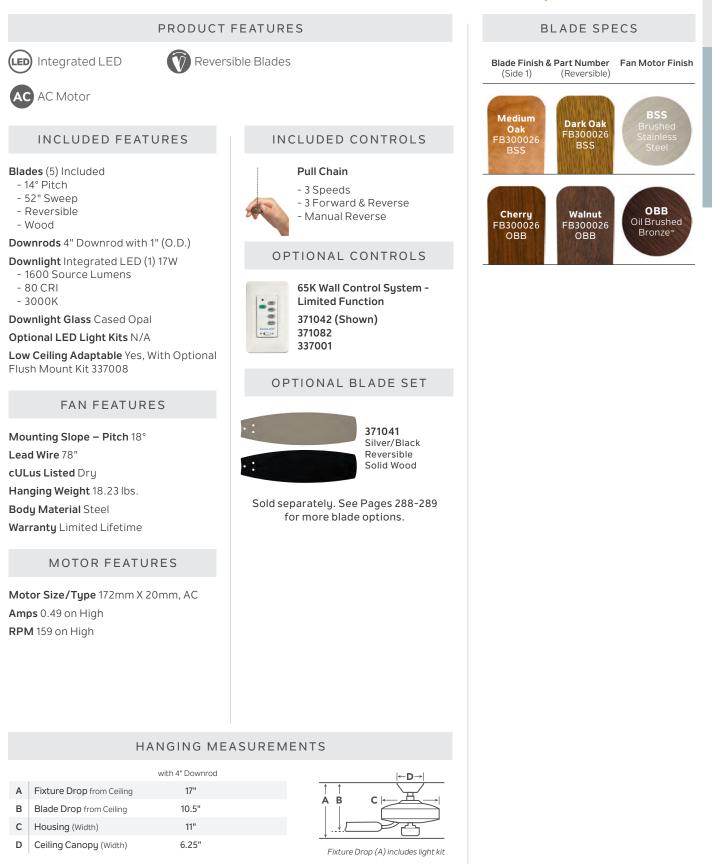

AIR PERFORMANCE				
AirflowPower UsageAirflow EfficiencCubic Ft. Per Minute on HighWatts on High (Excludes Lights)Cubic Ft. Per Minute Per				
5036	58	86		

52" Canfield[™] Select



330013MWH Matte White Finish, Satin Etched Glass, with Matte White or Weathered White Walnut Blades





Fan Motor Finish

MWH

Matte

White


Brushe Nicke

OBB

Oil Brushed

Bronze"

BLADE SPECS

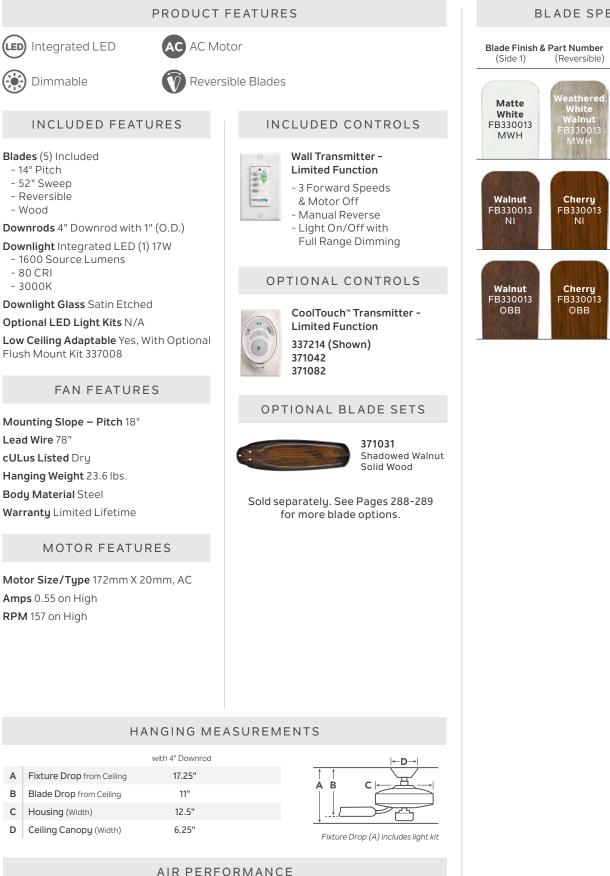

Airflow Efficiency

Cubic Ft. Per Minute Per Watt

76

Α

в

с

D

Airflow

Cubic Ft. Per Minute on High

4966

Power Usage

Watts on High (Excludes Lights)

66




60" Canfield[™] XL



60" Canfield[™] XL

BLADE SPECS

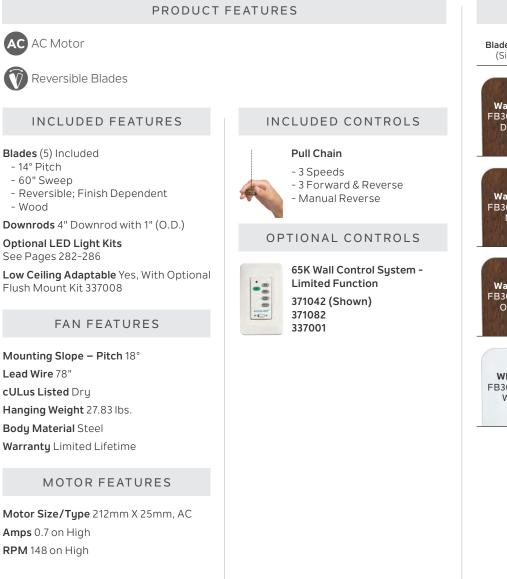


Blade Finish & Part Number Fan Motor Finish (Side 1) (Reversible) Cherry FB300188 DBK Walnut Distressed FB300188 Black DBK DBK Cherry FB300188 Walnut Brushed Nickel FB300188 NI OBB Cherry FB300188 Walnut Oil Brushed FB300188 Bronze" OBB OBB White WH FB300188 White WH

HANGING MEASUREMENTS

with 4" Downrod Α Fixture Drop from Ceiling в Blade Drop from Ceiling С Housing (Width) D Ceiling Canopy (Width)







Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
6785	83	82





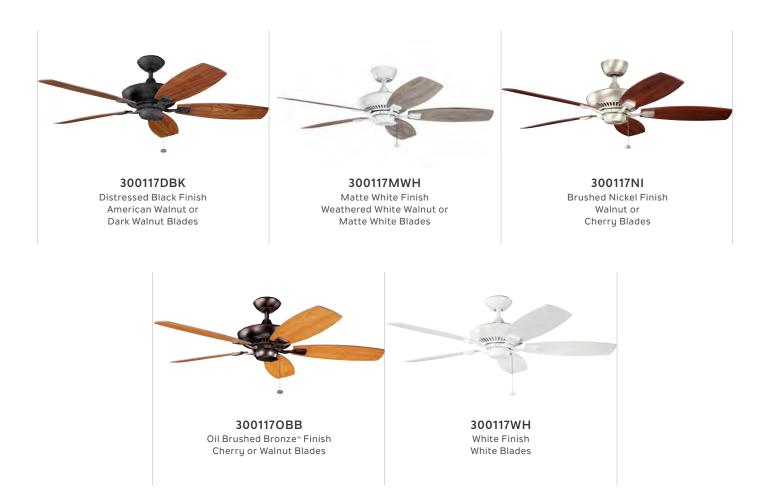

52" Canfield[™]

DBK

Distressed

Black

MWH

Matte

White


OBB


Oil Brushed

Bronze^{**}

WH

White



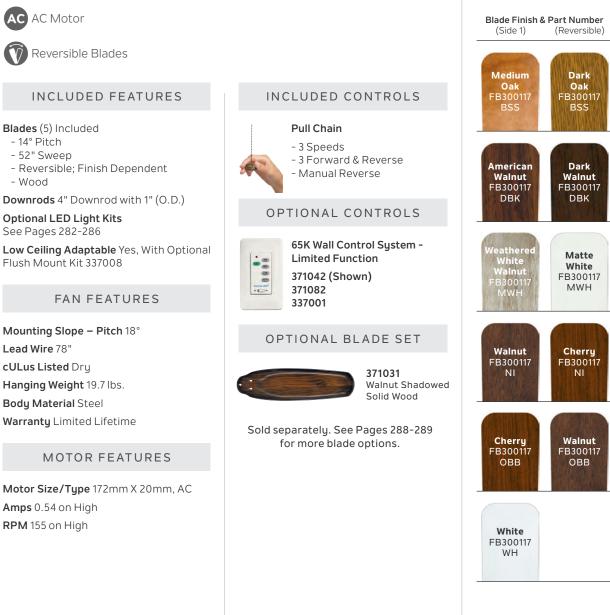

HANGING MEASUREMENTS

PRODUCT FEATURES

AC AC Motor

Blades (5) Included

Optional LED Light Kits See Pages 282-286

Flush Mount Kit 337008

Mounting Slope - Pitch 18°

Hanging Weight 19.7 lbs.

Body Material Steel Warranty Limited Lifetime

Amps 0.54 on High RPM 155 on High

Lead Wire 78"

cULus Listed Dry

- 14° Pitch


- Wood

- 52" Sweep

Reversible Blades

		with 4" Downrod
А	Fixture Drop from Ceiling	13.5"
в	Blade Drop from Ceiling	10.75"
С	Housing (Width)	12.5"
D	Ceiling Canopy (Width)	6.25"





Fixture Drop (A) includes light kit

AIR PERFORMANCE		
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
4868	66	74


INDOOR





44" Canfield[™]



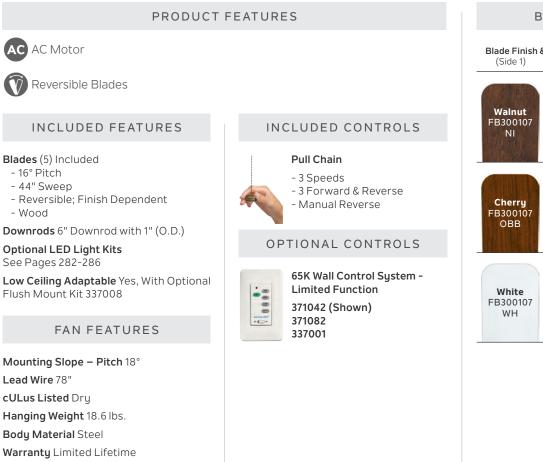

MOTOR FEATURES

- 16° Pitch

- Wood

Lead Wire 78"


- 44" Sweep

Motor Size/Type 172mm X 20mm, AC Amps 0.53 on High RPM 204 on High

HANGING MEASUREMENTS with 6" Downrod

А	Fixture Drop from Ceiling	
в	Blade Drop from Ceiling	
С	Housing (Width)	
D	Ceiling Canopy (Width)	5





Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
4230	61	74

BLADE SPECS






30" Canfield™





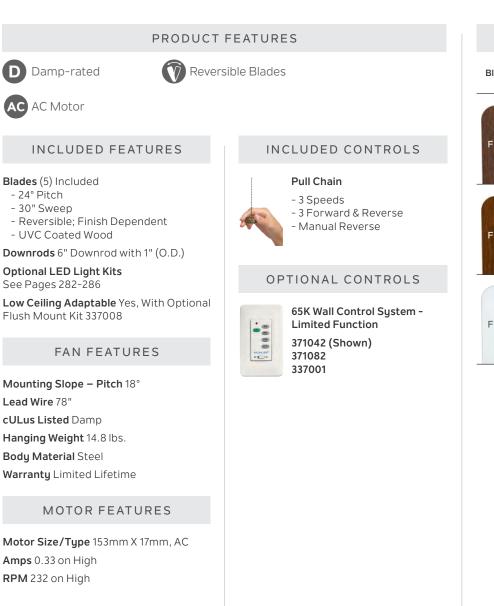


BLADE SPECS Blade Finish & Part Number Fan Motor Finish (Reversible) (Side 1) Cherry FB300103 Walnut FB300103 3rusne Nicko OBB Cherry FB300103 Walnut Oil Brushed FB300103 Bronze™ OBB OBB

White FB300103 WH

HANGING MEASUREMENTS

		with 6" Downrod	Flush Mount
А	Fixture Drop from Ceiling	15"	8.75"
в	Blade Drop from Ceiling	12.75"	6.5"
С	Housing (Width)	9.75"	9.75"
D	Ceiling Canopy (Width)	6"	6"



Fixture Drop (A) includes light kit

AIR PERFORMANCE			
Airflow Cubic Ft. Per Minute on High	Airflow Efficiency Cubic Ft. Per Minute Per Watt		
2439	40	61	




Snown: 310193TZP Tannery Bronze[™] Powder Coat Finish, with Walnut or Cherry Blades

60^{III} Canfield[™] XL Patio



310193WSP Weathered Steel Powder Coat Finish Teak or Walnut Blades

BLADE SPECS



Wet-rated

INCLUDED FEATURES

Blades (5) Included

- 14° Pitch
- 60" Sweep
- Reversible
- ABS

Downrods 4" Downrod with 1" (O.D.)

Optional LED Light Kits See Pages 282-286

Low Ceiling Adaptable Yes, With Optional Flush Mount Kit 337008

FAN FEATURES

Mounting Slope – Pitch 30° Lead Wire 78" cULus Listed Wet Hanging Weight 29.81 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 212mm X 25mm, AC Amps 0.68 on High RPM 167 on High



PRODUCT FEATURES

Reversible Blades

Pull Chain - 3 Speeds

INCLUDED CONTROLS

- 3 Forward & Reverse - Manual Reverse


OPTIONAL CONTROLS



65K Wall Control System -Limited Function 371042 (Shown) 371082 337001

HANGING MEASUREMENTS

		with 4" Downrod
А	Fixture Drop from Ceiling	14"
в	Blade Drop from Ceiling	11.25"
С	Housing (Width)	13.75"
D	Ceiling Canopy (Width)	6.25"



Fixture Drop (A) includes light kit

AIR PERFORMANCE		
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
6678	81	82






Fan Motor Finish



Blade Finish & Part Number

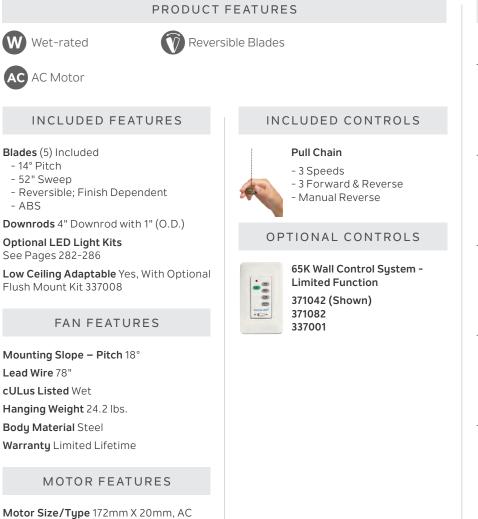


(Side 1) (Reversible) Satin **SBK** Satin Black Black FB310192 SBK TZP Tannery Cherry Walnut FB310192 TZP Bronze[®] FB310192 Powder TZP Coat WCP Dark Medium Weathered Walnut FB310192 Walnut Copper FB310192 Powde WCP WCP White WH FB310192 White WH

HANGING MEASUREMENTS

		with 4" Downrod
А	Fixture Drop from Ceiling	13.25"
в	Blade Drop from Ceiling	11"
С	Housing (Width)	12.5"
D	Ceiling Canopy (Width)	6.25"

Amps 0.59 on High RPM 185 on High





Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
5481	71	78



339501AP Antique Pewter Finish, Satin Etched Glass, with Light Cherry or Black Cherry Blades

52" Sutter Place[™] Select



1110



Oil Brushed Bronze[∞] Finish Walnut or Cherry Blades Umber Alabaster Glass (Shown as Flush Mount Installation)




Fan Motor Finish

BLADE SPECS

(Reversible)

Blade Finish & Part Number

(Side 1)

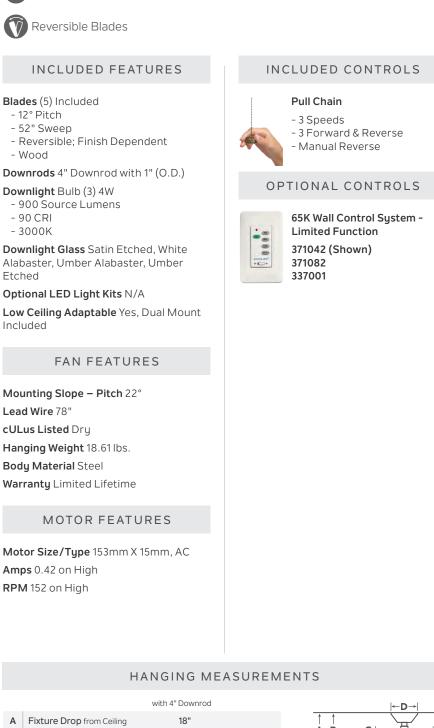

PRODUCT FEATURES


AC AC Motor

Etched



		with 4" Do
А	Fixture Drop from Ceiling	18
в	Blade Drop from Ceiling	10.7
С	Housing (Width)	12
D	Ceiling Canopy (Width)	5.2





Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
3832	49	79



52" Renew[™] Designer



330163NI Painted Brushed Nickel Finish Silver or Satin Black Blades White Etched Opal Glass



330163SBK Satin Black Finish Satin Black or Silver Blades White Etched Opal Glass



330163SNB Satin Natural Bronze Finish Walnut or Cherry Blades White Etched Opal Glass

Fan Motor Finish

MWH

Matte

White

NI


BLADE SPECS

(Reversible)

Distressed Antique Gray FB330163 MWH


Satin



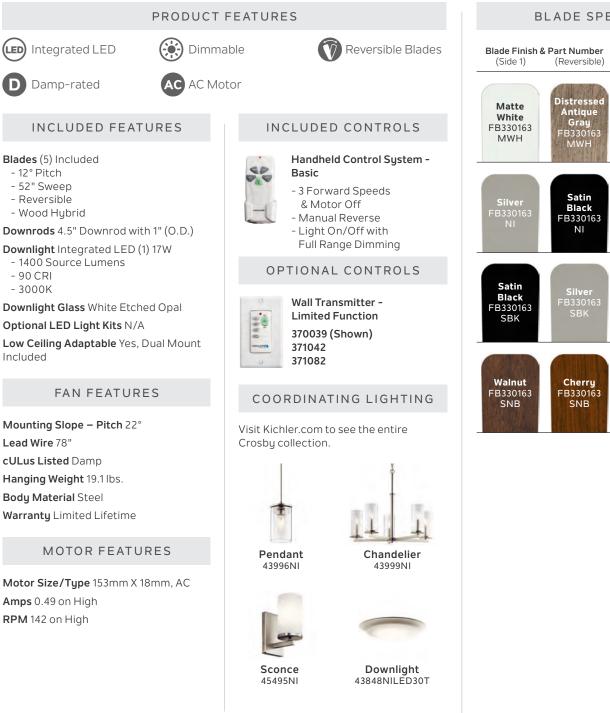

HANGING MEASUREMENTS

		with 4.5" Downrod	Flush Mount
А	Fixture Drop from Ceiling	15"	11.5"
в	Blade Drop from Ceiling	10.5"	7"
С	Housing (Width)	11.5"	11.5"
D	Ceiling Canopy (Width)	6.5"	6.5"



Fixture Drop (A) includes light kit

Airflow	AIR PERFORMANCE Power Usage	Airflow Efficiency
Cubic Ft. Per Minute on High	Watts on High (Excludes Lights)	Cubic Ft. Per Minute Per Watt
4380	58	76





330162BSS Brushed Stainless Steel Finish, White Etched Opal Glass, with Silver or Satin Black Blades

Renew[™] Premier



330162MWH

Matte White Finish Matte White or Distressed Antique Gray Blades White Etched Opal Glass



330162OBB Oil Brushed Bronze[™] Finish Walnut or Cherry Blades White Etched Opal Glass



330162SBK Satin Black Finish Satin Black or Silver Blades White Etched Opal Glass



Fan Motor Finish

MWH

Matte

White

OBB

Oil Brushed

Bronze

SBK

Satin

Black

BLADE SPECS

(Reversible)

Satin

Black

FB330162 BSS

Distressed

Antique


Gray FB330162 MWH

Cherry

FB330162

OBB

Silver FB330162 SBK

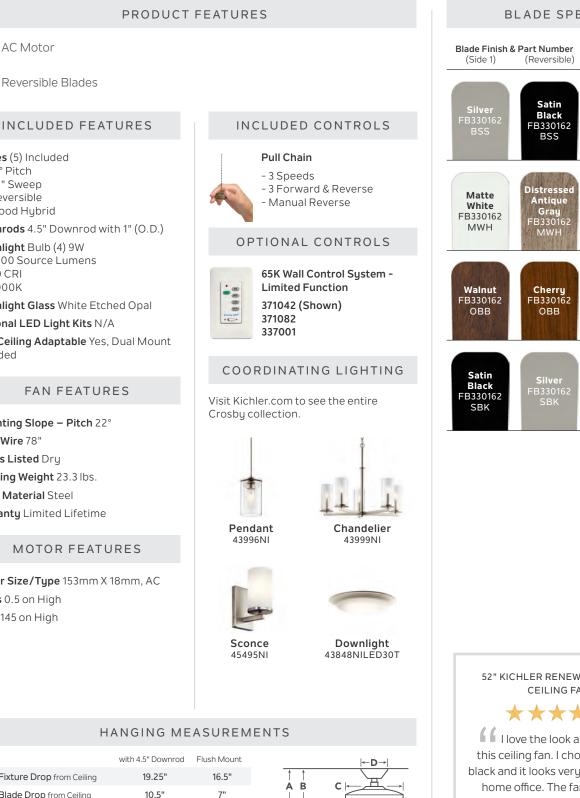

52" KICHLER RENEW™ PREMIER CEILING FAN

 $\star \star \star \star \star$

I love the look and design of this ceiling fan. I chose the satin black and it looks very stylish in our home office. The fan was easy to assemble and install. It was packaged nicely and it arrived in great condition. My husband was able to install it by himself fairly quickly. It really adds the finishing touches on the room.

- Rachaelk | Michigan

AC AC Motor

Blades (5) Included

- 12° Pitch
- 52" Sweep
- Reversible
- Wood Hybrid

Downrods 4.5" Downrod with 1" (O.D.)

Downlight Bulb (4) 9W

- 3600 Source Lumens
- 90 CRI
- 3000K

Downlight Glass White Etched Opal

Optional LED Light Kits N/A

Low Ceiling Adaptable Yes, Dual Mount Included

FAN FEATURES

Mounting Slope – Pitch 22° Lead Wire 78" cULus Listed Dry Hanging Weight 23.3 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 18mm, AC Amps 0.5 on High RPM 145 on High

		with 4.5" Downrod	Flush Mount	
А	Fixture Drop from Ceiling	19.25"	16.5"	
в	Blade Drop from Ceiling	10.5"	7"	
С	Housing (Width)	11.5"	11.5"	
D	Ceiling Canopy (Width)	6.5"	6.5"	

AIR	PERFORMANCE	-
/ \ \		_

Airflow Cubic Ft. Per Minute on High

Power Usage Watts on High (Excludes Lights)

59

Airflow Efficiency Cubic Ft. Per Minute Per Watt

78

Fixture Drop (A) includes light kit

4573



Renew[™] Select

330161MWH

Matte White Finish

Matte White or

Distressed Antique Gray Blades

White Etched Opal Glass



3301610BB Oil Brushed Bronze[™] Finish Walnut or Cherry Blades White Etched Opal Glass




Satin Black or Silver Blades White Etched Opal Glass



Fan Motor Finish



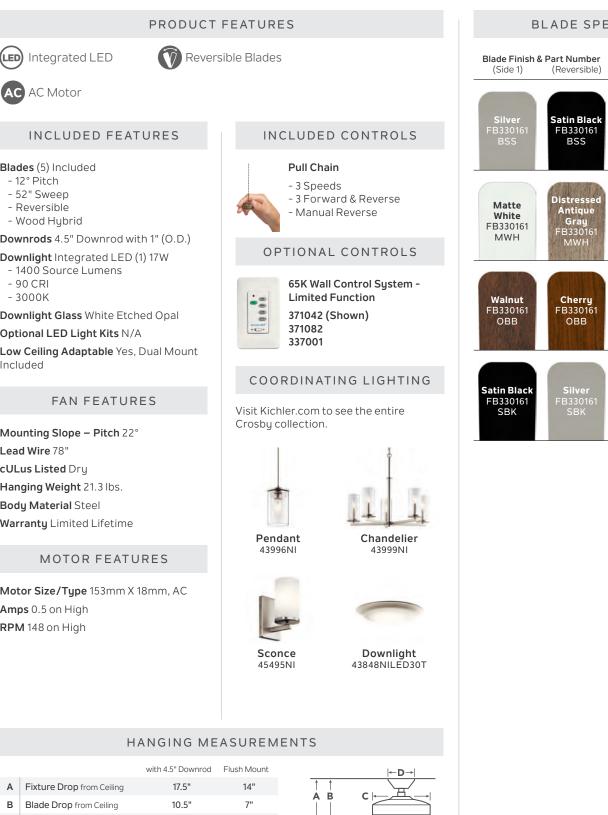

Blades (5) Included

- 12° Pitch
- 52" Sweep
- Reversible
- Wood Hybrid

Downrods 4.5" Downrod with 1" (O.D.)

Downlight Integrated LED (1) 17W

- 90 CRI
- 3000K

Downlight Glass White Etched Opal

Optional LED Light Kits N/A


Low Ceiling Adaptable Yes, Dual Mount Included

Mounting Slope – Pitch 22° Lead Wire 78" cULus Listed Dry Hanging Weight 21.3 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 18mm, AC Amps 0.5 on High RPM 148 on High

		with 4.5" Downrod	Flush Mount
А	Fixture Drop from Ceiling	17.5"	14"
в	Blade Drop from Ceiling	10.5"	7"
С	Housing (Width)	11.5"	11.5"
D	Ceiling Canopy (Width)	6.5"	6.5"



Fixture Drop (A) includes light kit

Distressed Antique MWH Matte White OBB Oil Brushed Bronze" SBK Satin Black



Shown: 330164BSS Brushed Stainless Steel Finish, with Silver or Satin Black Blades

52" Renew[™] Energy Star



330164MWH Matte White Finish Matte White or Distressed Antique Gray Blades





3301640BB Oil Brushed Bronze[™] Finish Walnut or Cherry Blades



330164SBK Satin Black Finish Satin Black or Silver Blades





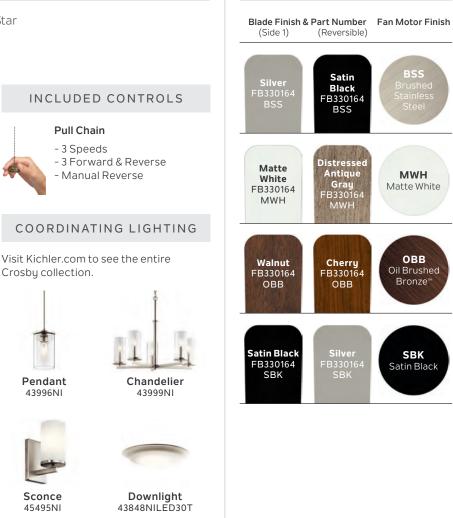

DC DC Motor Energy Star **Reversible Blades** INCLUDED FEATURES Blades (5) Included - 12° Pitch - 52" Sweep - Reversible - Wood Hybrid Downrods 4.5" Downrod with 1" (O.D.) **Optional LED Light Kits** See Pages 282-286 Low Ceiling Adaptable Yes, Dual Mount Included Crosby collection. FAN FEATURES Mounting Slope – Pitch 22° Lead Wire 78" cULus Listed Dry Pendant Hanging Weight 16.1 lbs. 43996NI Body Material Steel Warranty Limited Lifetime

PRODUCT FEATURES

MOTOR FEATURES


Motor Size/Type 155mm X 16mm, DC Amps 0.35 on High RPM 165 on High Energy Star[®] Yes

HANGING MEASUREMENTS

Sconce

45495NI

		with 4.5" Downrod	Flush Mount
А	Fixture Drop from Ceiling	13.5"	10"
в	Blade Drop from Ceiling	10.5"	7"
С	Housing (Width)	11.5"	11.5"
D	Ceiling Canopy (Width)	6.5"	6.5"



Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
5123	30	171



330160BSS Brushed Stainless Steel Finish, with Silver or Satin Black Blades





330160MWH Matte White Finish Matte White or Distressed Antique Gray Blades



3301600BB Oil Brushed Bronze[™] Finish Walnut or Cherry Blades



330160 SBK Satin Black Finish Satin Black or Silver Blades

MWH

Matte

White


OBB

Oil Brushed

Bronze™

SBK

Satin Black

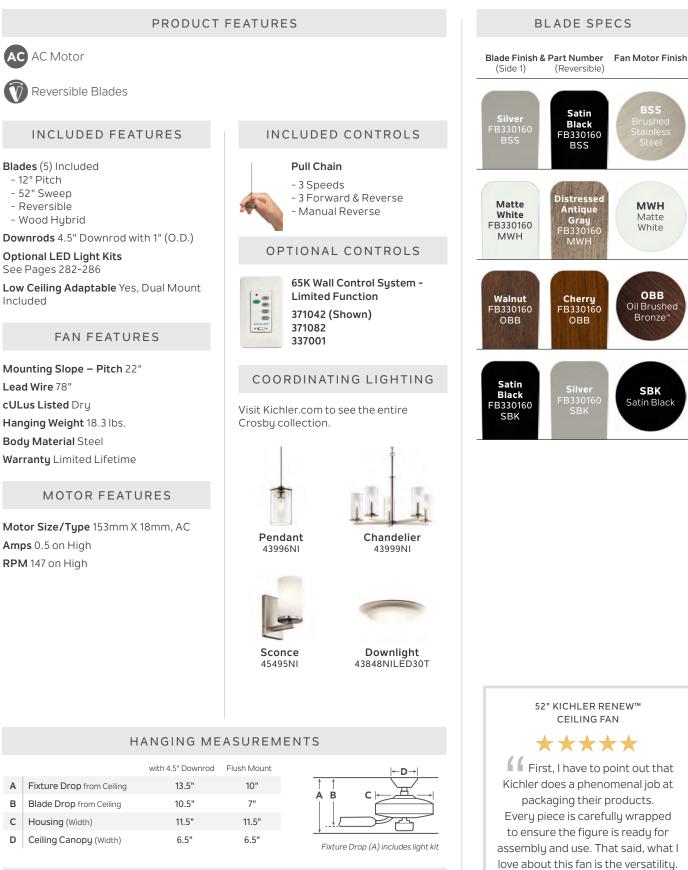

	AIR PERFORMANCE
Airflow	Power Usage
Per Minute on High	Watts on High (Excludes Lights)

Cubic Ft. Per Minute on High

А

в

С

D

- 12° Pitch

Included

Lead Wire 78"

Airflow Efficiency Cubic Ft. Per Minute Per Watt

4484

59

76

Kichler does a phenomenal job at packaging their products. Every piece is carefully wrapped to ensure the figure is ready for assembly and use. That said, what I love about this fan is the versatilitu. ... The fan itself is powerful, and does well to circulate the space we have it in (master bedroom). We love it!

- Kschu | Illinois

INDOOR



<u>52"</u> Renew[™] Patio



330165NI Brushed Nickel Finish Silver or Satin Black Blades




330165SBK Satin Black Finish Satin Black or Silver Blades



330165SNB Satin Natural Bronze Finish Walnut or Cherry Blades



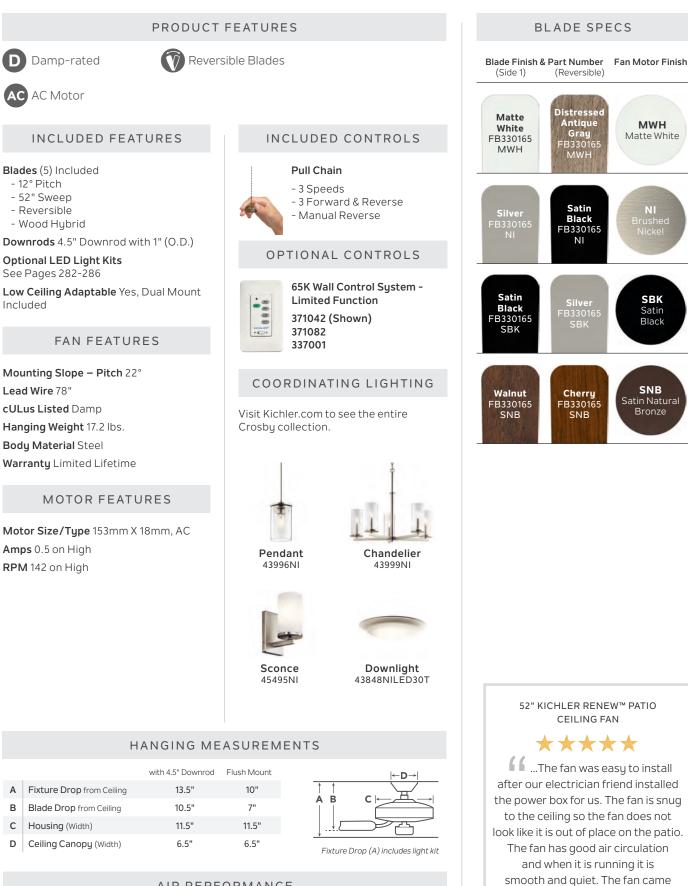

AIR PERFORMANCE

Airflow Cubic Ft. Per Minute on High

Power Usage Watts on High (Excludes Lights)

Cubic Ft. Per Minute Per Watt

4581

59

Airflow Efficiency 78

extremely well packaged with

good instructions.


- BethA48 | Wisconsin

Shown: 330019MWH Matte White Finish, Frosted White Polycarbonate Lens, with Matte White Blades





BLADE SPECS

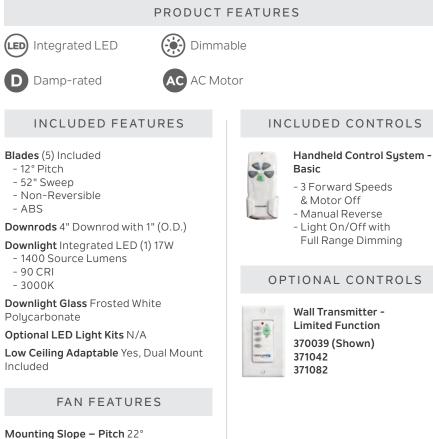

Blade Finish & Part Number Fan Motor Finish (Side 1) (Reversible) Matte White FB330019 MWH MWH Matte White Satin Black FB330019 SBK Satin Black SBK SNB Walnut Satin Natural FB330019 Bronze SNB White WH FB330019 White WH

HANGING MEASUREMENTS


		with 4" Downrod	Flush Mount
А	Fixture Drop from Ceiling	12.5"	9.5"
в	Blade Drop from Ceiling	10.5"	7.5"
С	Housing (Width)	11.5"	11.5"
D	Ceiling Canopy (Width)	5.9"	5.9"

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC

Lead Wire 78" cULus Listed Damp Hanging Weight 17.6 lbs. Body Material Steel Warranty Limited Lifetime

Amps 0.43 on High RPM 167 on High




Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
4367	52	84



52" Basics Pro Premier



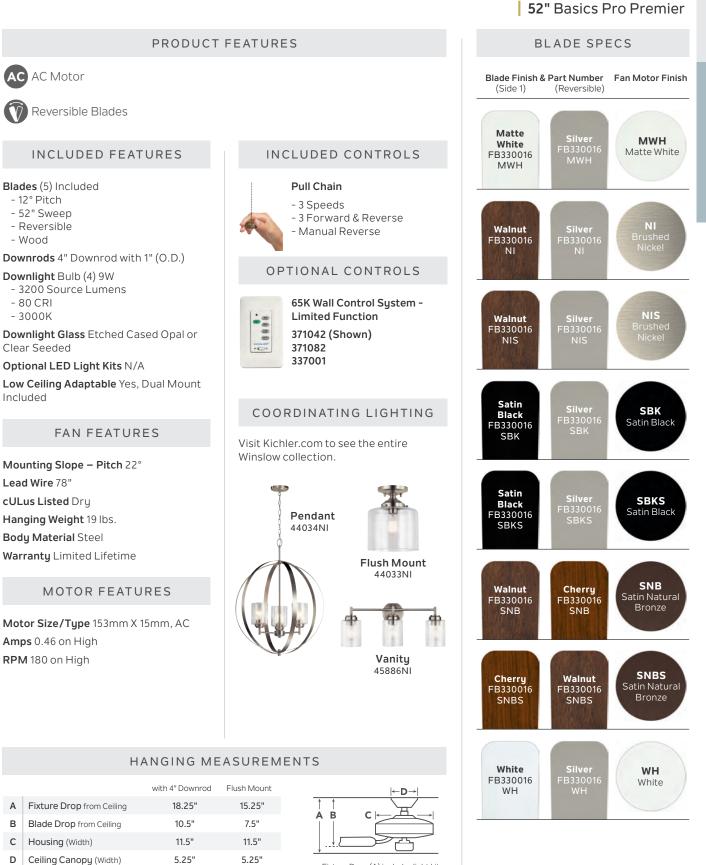

Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
4102	58	71

А

в


С

D



Basics Pro Select




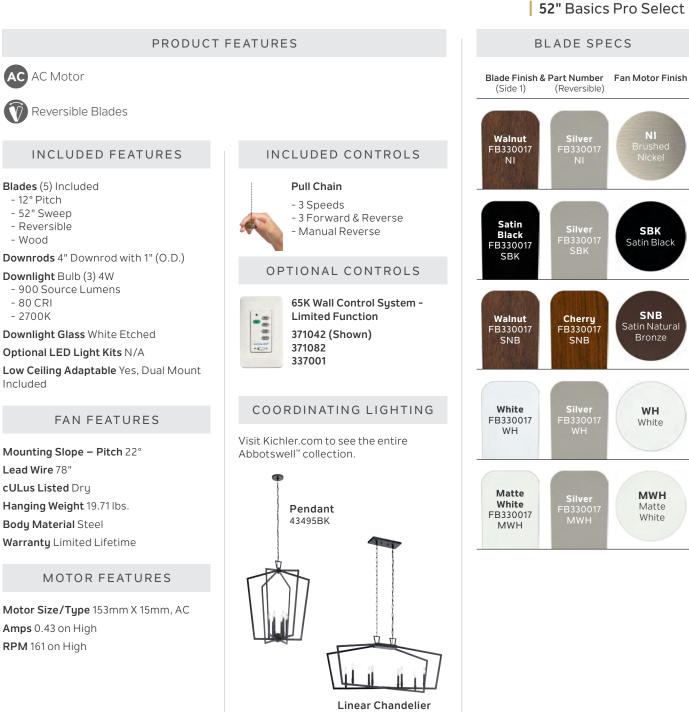

43494BK

HANGING MEASUREMENTS

		with 4" Downrod	Flush Mount
А	Fixture Drop from Ceiling	17.5"	14.5"
в	Blade Drop from Ceiling	10.5"	7.5"
С	Housing (Width)	11.5"	11.5"
D	Ceiling Canopy (Width)	5.25"	5.25"



Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
4200	52	81

SBK

SNB

WH

White

MWH


Matte

White

Shown: 330020MWH Matte White Finish, with Matte White or Silver Blades

52" Basics Pro Legacy



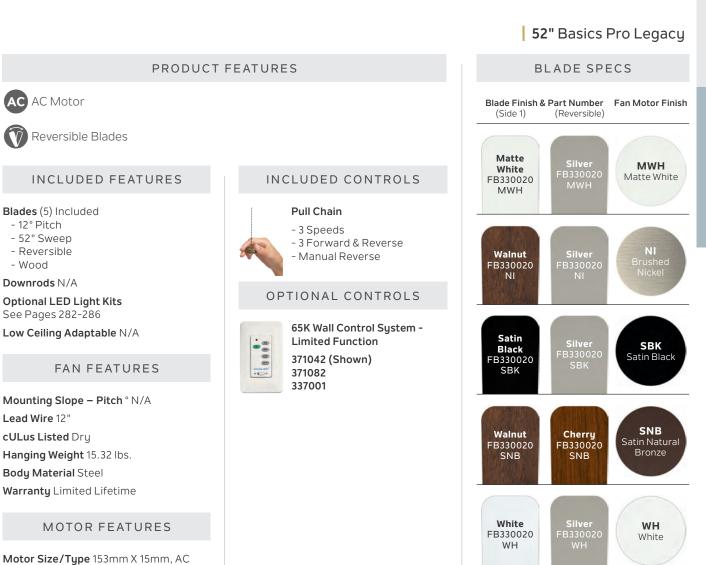

RPM 152 on High

AC AC Motor

Blades (5) Included

- 12° Pitch

- 52" Sweep

- Reversible

Downrods N/A

Lead Wire 12"

cULus Listed Dry

Body Material Steel

Amps 0.57 on High

See Pages 282-286

- Wood


HANGING MEASUREMENTS

А	Fixture Drop from Ceiling
в	Blade Drop from Ceiling
С	Housing (Width)

Ceiling Canopy (Width)

D

8" 6" 11.5" 11.5"



Fixture Drop (A) includes light kit

Cubic Ft. Per Minute on High	Watts on High (Excludes Lights)	Cubic Ft. Per Minute Per Watt
Airflow	Power Usage	Airflow Efficiency



52" Basics Pro



52" Basics Pro

MWH

Matte

White

Brushed Nickel

SBK

Satin


Black


SNB

Bronze


WH

White



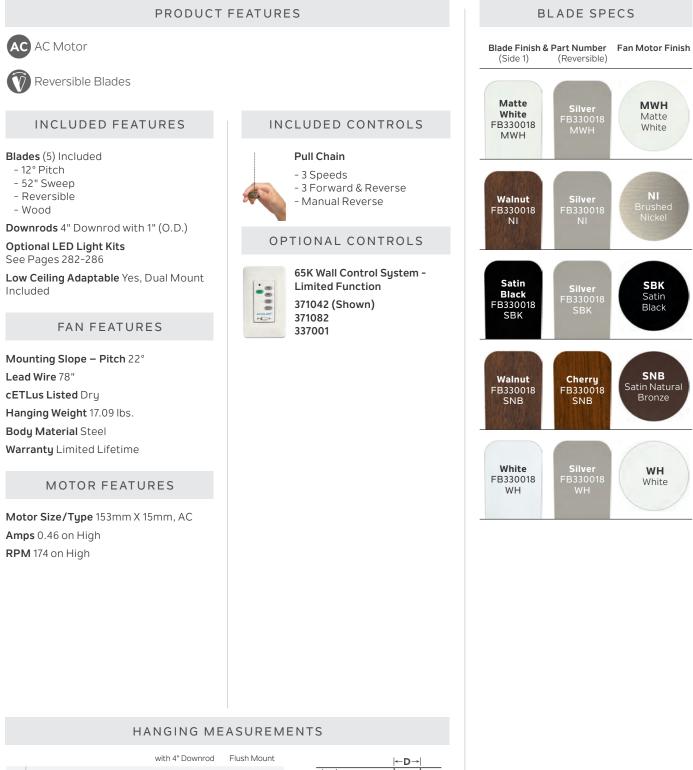

		with 4" Downrod	Flush Mount
А	Fixture Drop from Ceiling	12.5"	9.5"
в	Blade Drop from Ceiling	10.5"	7.5"
С	Housing (Width)	11.5"	11.5"
D	Ceiling Canopy (Width)	5.25"	5.25"




Fixture Drop (A) includes light kit

AIR PERFORMANCE				
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt		
4119	58	71		

Shown: 330021MWH Matte White Finish with Matte White Blades

52" Basics Pro Legacy Patio



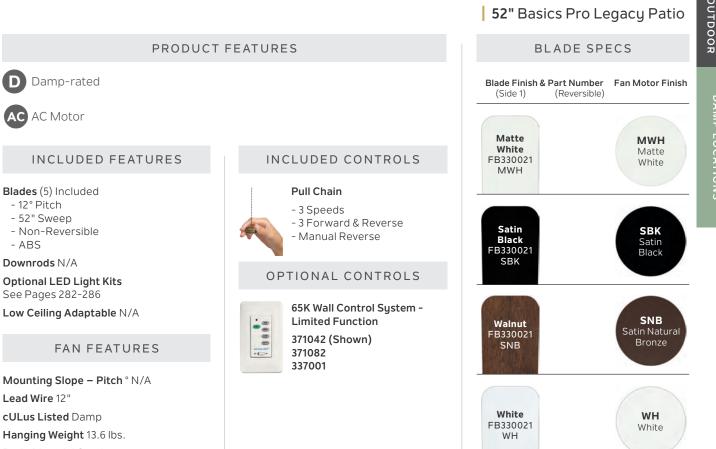

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC Amps 0.57 on High RPM 157 on High

D Damp-rated

AC AC Motor

Blades (5) Included

- Non-Reversible

Optional LED Light Kits See Pages 282-286

- 12° Pitch

- ABS

- 52" Sweep

Downrods N/A

Lead Wire 12"

cULus Listed Damp

Body Material Steel Warranty Limited Lifetime

Hanging Weight 13.6 lbs.


HANGING MEASUREMENTS

А	Fixture Drop from Ceiling
в	Blade Drop from Ceiling
С	Housing (Width)

Ceiling Canopy (Width)

D





Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
3676	57	64



52" Basics Pro Patio





Fan Motor Finish

MWH

Matte

White

SBK

Satin

Black

SNB


Bronze

WH

White

BLADE SPECS

(Reversible)

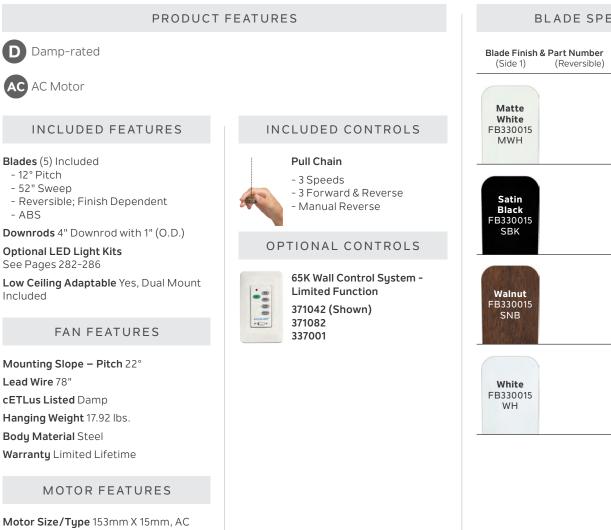


HANGING MEASUREMENTS

		with 4" Downrod	Flush Mount
А	Fixture Drop from Ceiling	12.5"	9.5"
в	Blade Drop from Ceiling	10.5"	7.5"
С	Housing (Width)	11.5"	11.5"
D	Ceiling Canopy (Width)	5.25"	5.25"

- ABS

Amps 0.43 on High RPM 181 on High



Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
4263	55/52	75

Kichler.com 273







Accessories

Want to enhance your ceiling fan? Simple tweaks can make a big impact. To help, we offer a variety of ceiling fan accessories such as wall and remote controls, light kits, blades, and shades to help change the look of your ceiling fan.



AC Control Systems - Full Function

Designed for AC motor fans. Includes transmitter and receiver. 65K Frequency Options.



CoolTouch[™] Handheld Control System **Full Function**

371085 ALM, IV, WH (shown)

- 65K Frequency Options
- 3 Forward Speeds, Reverse, and Motor Off.
- · Lights on/off with full-range dimming (including LED light sources). On/off only for
- fluorescent. • Wet-rated for indoor/outdoor covered areas.
- Wireless radio frequency operational radius of 30' or less.
- Replaces any single-wall switch or mounts on any flat surface. Retrofits most pull chain fans and most ceiling fan brands.
- Includes transmitter and canopy-mounted, learn mode receiver with 65,000 code settings. Also includes wall bracket and mounting hardware, plus replaceable long-life lithium batteries.
- Transmitter is Dry-rated for indoor use only.



Optional Wall Transmitter: 371065MULTR

65K Wall Transmitter - Full Function Includes Almond (ALM), Ivory (IV), and White (WH)

Optional CoolTouch Accessories: See page 277



Wall Control System

Full Function

371045MUL (ALM, IV & WH)

- 65K Frequency Options
- 3 Forward Speeds, Reverse, and Motor Off.

D

D

- · Lights on/off with full-range dimming (including LED light sources). On/off only for fluorescent.
- Damp-rated for indoor/outdoor covered areas.
- Includes transmitter and canopy-mounted, learn-mode receiver with 65,000 code settings. Also includes White, Ivory, and Almond switch and cover plates, plus mounting hardware.
- · Hard-wired wall control.
- Transmitter is Dry-rated for indoor use only.



Optional Remote Transmitter: 370006WHTR 65K CoolTouch™ Transmitter - Full Function White (WH)



AC Control Systems - Limited Function

Designed for AC motor fans. Includes transmitter and receiver. 65K Frequency Options.

W



CoolTouch[™] Handheld Control System Limited Function

371082WH

- 65K Frequency Options
- 3 Forward Speeds, Motor Off, Manual Reverse. Lights on/off with full-range dimming
- (including LED light sources). On/off only for fluorescent. • Wet-rated for indoor/outdoor covered areas.
- Wireless radio frequency operational radius of 30' or less.
- Replaces any single-wall switch or mounts on any flat surface. Retrofits most pull chain fans and most ceiling fan brands.
- Includes transmitter and canopy-mounted, learn mode receiver with 65,000 code settings. Also includes wall bracket and mounting hardware, plus replaceable long-life lithium batteries.
- Transmitter is Dry-rated for indoor use only.



Optional Wall Transmitter: 371062MULTR

65K Wall Transmitter - Limited Function Includes Almond (ALM), Ivory (IV), and White (WH)

Optional CoolTouch Accessories: See page 277



Wall Control System Limited Function

371042MUL (ALM, IV & WH)

- 65K Frequency Options
- 3 Forward Speeds, Motor Off, Manual Reverse.
- · Lights on/off with full-range dimming (including LED light sources). On/off only for fluorescent.
- Damp-rated for indoor/outdoor covered areas.
- Includes transmitter and canopy-mounted, learn-mode receiver with 65,000 code settings. Also includes White, Ivory, and Almond switch and cover plates, plus mounting hardware.
- Hard-wired wall control.
- Transmitter is Dry-rated for indoor use only.



Optional Remote Transmitter: 370005WHTR

65K CoolTouch[™] Transmitter - Limited Function White (WH)





Designed for AC motor fans. Includes transmitter and receiver. 16 Frequency Options.



Handheld Control System

Basic Function

337001WH

- 16 Frequency Options
- 3 Forward Speeds, Motor Off, Manual Reverse.
- Lights on/off with full-range dimming (including LED light sources). On/off only for fluorescent. Not recommended for LED light kits.
- Wet-rated control for indoor/outdoor covered areas.
- Includes transmitter and canopy-mounted receiver with 16 possible frequencies.
- Also includes wall bracket and mounting hardware, plus 9-volt battery.
- Transmitter is Dry-rated for indoor use only.



Upgrade - Wall Transmitter:

370039MULTR 16 Frequency Options Wall Transmitter – Limited Function Includes Almond (ALM), Ivory (IV), and White (WH) wall and cover plates



AC Control Transmitters

Designed for AC motor fans. Transmitter only. 16 Frequency Options.









Full Function

CoolTouch[™] Transmitter 337009WHTR (WH)

- 16 Frequency Options
- 3 Forward Speeds, Reverse, Motor Off.
- Lights on/off with full-range dimming.
- Dry-rated for indoor use only.
- Transmitter works with existing system. Wireless operational radius of 30' or less.
- Includes White wall and cover plate, plus mounting hardware.

Optional Accessory: 370010 IV CoolTouch Ivory (IV)

Wallplate

Wall Transmitter

370038MULTR (ALM, IV & WH)

- 16 Frequency Options
- 3 Forward Speeds, Reverse, Motor Off
- Lights on/off with full-range dimming
- Transmitter works with existing system. Wireless operational radius of 30' or less.
- Includes White, Ivory, and Almond switch and cover plates, plus mounting hardware.
- Hard-wired wall control. No batteries needed.

Limited Function

CoolTouch[™] Transmitter

337214TR (WH)

- 16 Frequency Options
- 3 Forward Speeds, Motor Off, Manual Reverse
- Lights on/off with full-range dimming
- Damp-rated for indoor/outdoor covered areas
- Transmitter works with existing system. Wireless operational radius of 30' or less.
- Includes White wall and cover plate, plus mounting hardware.

Optional Accessory: 370010IV CoolTouch Ivory (IV) Wallplate

Wall Transmitter

370039MULTR (ALM, IV & WH)

16 Frequency Options

- 3 Forward Speeds, Motor Off, Manual Reverse
- Lights on/off with full-range dimming
- Transmitter works with existing system. Wireless operational radius of 30' or less.
- Includes White, Ivory, and Almond switch and cover plates, plus mounting hardware.
- Hard-wired wall control. No batteries needed.



370010IV Single Gang CoolTouch[™] Wallplate Works with any AC or DC CoolTouch[™] Control System

CoolTouch[™] Accessories



370011 IV, WH (shown) Dual Gang CoolTouch[™] Wallplate Works with any AC or DC CoolTouch[™] Control System

AC Wall Controls



Designed for use with most AC motor fans.



Dual-Slide Control Fan & Light

337010WH

• Max 1.25 Amp

- Fan speed and light control.
- Full-range dimming. Not compatible with LED light sources.
- Dry-rated for indoor use only.
- Includes wall switch and cover plate, plus mounting hardware. Requires 3 wire + ground installation.



4-Speed Slide Control Fan only

337012 IV, WH (shown)

• Max 1.25 Amp

- 4-Speed fan control. Controls 1 fan only.
- Dry-rated for indoor use only.
- Includes wall switch and cover plate, plus mounting hardware. Can be used in a dual gang box alongside our Dimmer Slide Control 337011WH.



Dimmer Slide Control

Light only

337011WH

• Max 600W

- Full-range dimming. Not compatible with LED light sources.
- Controls 1 light fixture or 1 fan light only.
- Dry-rated for indoor use only.
- Includes wall switch and cover plate, plus mounting hardware. Can be used in a dual gang box alongside our 4-Speed Slide Control 337012.



4-Speed Rotary Wall Control Fan(s) only

370040 (Brushed Aluminum)

• Max 10 Amp

- Controls multiple fans on one circuit.
- Dry-rated for indoor use only.
- Brushed Aluminum faceplate with Black control knob.



4-Speed Rotary Wall Control Fan(s) only

370032MUL (ALM, IV & WH)

- Max 5 Amp
- Controls 2 or 3 (max.) fans.
- Dry-rated for indoor use only.
- Includes Almond (ALM), Ivory (IV), and White (WH) faceplates and control knobs.





DC Control Systems - Full Function

Designed for DC motor fans only.



6-Speed DC CoolTouch[™] Transmitter Full Function

371075WHTR

- 65K Frequency Options
- 6 Forward Speeds, Reverse, and Motor Off.
- Lights on/off with full-range dimming (including LED light sources).
- Includes White faceplate and mounting hardware. No more than 2 fans on one circuit.

Optional Accessories:

370010IV CoolTouch Wallplate in Ivory (IV) **370011IV, WH** CoolTouch Dual Gang Wallplate in Ivory (IV) or White (WH)





370036 IVTR, WHTR (shown)

- 65K Frequency Options
- 6 Forward Speeds, Reverse, and Motor Off.
- Lights on/off with full-range dimming (including LED light sources).
- Includes Ivory or White faceplate and mounting hardware. No more than 2 fans on one circuit.
- Hard-wired wall control.



Hanger System Accessories

For ceilings in excess of 30° of slope, utilize our 60° Slope Adapter accessory.







	60° Slope Adapter	Flush Mount Kits	Downrod Coupler
ltem Number and Finish	337005 + Finish code	337008 + Finish code	337007 + Finish code
Features	 Recommended for fan stability in high wind applications - for any sloped or flat ceiling application Adapts to sloped or vaulted ceilings from 0° to 60° Accepts our CoolTouch[™] Receiver Unit for remote controlled fans Includes "Stabilized" Mounting System with tension feature Safety features prevent fan from "lifting" off mounting system Heavy-duty design features 2 safety pins and 1 screw set for maximum safety 	 For use with any fan noted as "Low Ceiling Adaptable" Accepts control receiver for remote controlled fans 	 Decorative Coupler for 1" (O.D.) extension downrods Connects 2 downrods to achieve a custom hang length or length longer than 72"
Dimensions	6.00" Dia. x 4.00" H	6.00" Dia. x 2.75" H	2.00" Dia. x 4.00" H
Notes	 Designed for indoor or outdoor use. Outdoor finishes are powder coated or painted with a galvanized undercoating. Designed for use with 1" O.D. downrods ONLY Available in all Kichler[®] fan finishes Downrod sold separately U.S. Patent Pending 	Overall fan height reduced by approximate length of downrod removed	For use with dual-threaded downrods only *ANS finish only available on 337007 Downrod Coupler

Finish codes

ANS	Antique Satin Silver*	MWH	Matte White	SNB	Satin Natural Bronze
AP	Antique Pewter	NBR	Natural Brass	TZP	Tannery Bronze™ Powder Coat
AVI	Anvil Iron	NI	Brushed Nickel	WCP	Weathered Copper
BAB	Burnished Antique Brass	OBB	Oil Brushed Bronze™	WH	White
BSS	Brushed Stainless Steel	OLZ	Oiled Bronze	WN	Walnut
СМО	Coffee Mocha	ΟZ	Olde Bronze®	WSP	Weathered Steel
DBK	Distressed Black	PN	Polished Nickel	WZC	Weathered Zinc
MDW	Mediterranean Walnut™	SBK	Satin Black		

AUB fan finish Includes DBK (Distressed Black) downrod BAP fan finish Includes AP (Antique Pewter) downrod



Outdoor Light Kits

All outdoor light kits can also be used on coordinating indoor fans.

	LED Industr	al Mesh Light Kit	LE	ED Bridge Poin	t Ceiling Fan Light Kit
	380952 DBK	(shown), OZ, WZC	380	945 DBK, OZ (s	shown), WCP, WSP, WZC
Glass	Etched Cased Opal		Glass	Clear Seeded	
Downlight	 17W Dimmable Integrated LED Platform 1,600 Im 80 CRI 3,000K 	·	Downlight	• Includes (1) E26, 7W LED, 2,700K	
Dimensions	12.75" Diameter 6.25" Height		Dimensions	12.50" Diameter 8.25" Height	
ETL Listed	Wet		cUL Listed	Wet	W

LED Yorke Ceiling Fan Light Kit

380915 DBK, MWH, SBK (shown), TZP, WCP

Glass	Clear Seeded	
Downlight	• Includes (1) E26,7W LED, 2,700K	
Dimensions	8.50" Diameter 9.00" Height	
cUL Listed	Wet	•

LED Ahrendale[™] Ceiling Fan Light Kit

380949 AUB, AVI (shown), WZC

Glass	Etched Cased Opal	
Downlight	 17W Dimmable Integrated LED Platform 1,600 Im 80 CRI 3,000K 	
Dimensions	11.75" Diameter 5.25" Height	
ETL Listed	Wet	

(LED) W

Profile Light Kit		LED Low-P	rofile Light Kit
_ (MWH shown)		380931 MUL	(SNB shown)
	Glass	Umber Etched	
	Downlight	 17W Dimmable Integrated LED Platform 1,600 lm 80 CRI 3,000K 	
	Dimensions	11.50" Diameter 4.25" Height	
	cUL Listed	Wet	
	Notes	Includes MWH, NI and SNB	

finishes.

LED Low-Pr

380930 MUL

(LED) W

Etched Cased

• 17W Dimmable Integrated LED Platform

Opal

• 1,600 lm • 80 CRI • 3,000K 11.50" Diameter

4.25" Height

Includes MWH,

NI and SNB

finishes.

Wet

Notes

Glass

Downlight

Dimensions

cUL Listed

Outdoor Light Kits

All outdoor light kits can also be used on coordinating indoor fans.

LED Slim-Profile Light Kit Integrated LED Light Kit 380911 ANS, CMO, DBK, MWH (shown), SBK, WH 338629 MWH, WCP, WSP (shown) Glass Cased Opal Etched Cased Opal Glass • Includes (1) 9W • 17W Dimmable E26 LED lamp Integrated LED Downlight Platform Downlight • 1,600 lm • 80 CRI 11.00" Diameter • 3,000K Dimensions 4.50" Height 7.50" Diameter Dimensions cUL Listed Wet 3.00" Height ABS fixture. cUL Listed Wet For use with: Arkwet[™], ABS fixture. For Canfield[™], Notes use with: Arkwet[™], Canfield[™], Kevlar[™], Notes Kevlar[™], Lehr[™], and Lehr[™] II Lehr[™], and Lehr[™] II W (LED) (W Fans Fans

	Outdoor LED Light Kit					
38097	380912 ANS, CMO (shown), MWH, SBK, TZP, WCP, WH, WSP					
Glass	Cased Opal					
Downlight	• Includes (2) 9W E26 LED lamps					
Dimensions	11.00" Diameter 4.50" Height					
cUL Listed	Wet					
Notes		W				

Outdoor LED Light Kit

380010 ANS, CMO, MWH (shown), SBK, TZP, WCP, WH, WSP

Glass	Cased Opal	R
Downlight	• Includes (2) 9W E26 LED lamps	
Dimensions	10.25" Diameter 5.50" Height	
cUL Listed	Wet	
Notes		W



Indoor Light Kits

Works with any indoor or dry-rated fan that will take an optional light kit.



Notes

ETL Listed

Indoor

(LED)

Indoor Light Kits

Works with any indoor or dry-rated fan that will take an optional light kit.

		LED 3-Light Bowl Light Kit							
Item Number		380015 MUL (WH shown)	380018 MUL (WH shown)	380016 MUL (OBB shown)	380017 MUL (OBB shown)				
Downlight	• Includes (3), B10, 4W LED Lamps								
Dimensions	11.00" Diameter 5.75" Height								
cUL Listed	Indoor	<u> </u>							
Glass		White Alabaster Swirl	Opal Etched	Citrine	Umber Etched				
Notes	Includes BSS, DBK, NI, OBB, SNW, TZ and WH cap finishes.								

		LED Large Bowl Light Kit						
ltem Number		380011 MUL (NI shown)	380012 MUL (WH shown)					
Downlight	• Includes (3), E26, 4W LED Lamps							
Dimensions	12.50" Diameter 5.50" Height	T	81					
cUL Listed	Indoor	6						
Glass		Satin Etched	White Linen					
Notes	Includes NI, OBB	s, SNW, TZ and WH cap finishes.	* *					
Item Number		380013 MUL (TZ shown)	380014 MUL (TZ shown)					
Downlight	• Includes (3), E26, 4W LED Lamps							
Dimensions	12.50" Diameter 5.50" Height		*					
cUL Listed	Indoor							
Glass		Pine Bark	Alabaster Swirl					
Notes	Includes NI, OBB	s, SNW, TZ and WH cap finishes.	₽ \$					

Indoor Light Fitters

Designed to accommodate 2-1/4" fitter glass (sold separately). See the next page for glass options.

		4-Light Medium Base Fitter LED Light Kit	4-Light Bent Arm Fitter LED Light Kit
Item Number		350210 AP, BSS, DBK, MWH, NI, OBB, OZ (SHOWN), SNB, TZ, WH	350015 AP, BSS, DBK, MWH, NI, OBB, OZ, SBK (SHOWN), SNB, TZ, WH
Downlight	• Includes (4) E26, 4W LED Lamps		
Socket	Threaded Nord Sockets		
cUL Listed	Indoor	Concerto a	
Dimensions		6.75" Width 3.75" Height	12.75" Width 3.50" Height
Notes	Includes retainer	nut tool for easy assembly of glass shades.	

		3-Light Decorative Fitter LED Light Kit
Item Number		380041 DBK (shown), MWH, NI, OBB, OZ, SBK, TZ, WH
Downlight	 Includes (3) 4W E12 Candelabra LED Lamps 	
Dimensions	10.25" Diameter 6.75" Height	
cUL Listed	Indoor	
Glass	None	

View our most up-to-date ceiling fan options and accessories at Kichler.com

2-1/4" Fitter Glass

Designed to work with our fitters on the previous page.



	2-1/4" Fitter Glass					
Item Number	340126	340127	340115	340116	340135	
Glass	Umber Etched	Satin Etched	Citrine	Etched Seedy	Clear Seeded	
Dimensions	5.25" Width 4.75" Height	5.25" Width 4.75" Height	5.50" Width 5.00" Height	5.50" Width 5.00" Height	5.25" Width 4.75" Height	



	2-1/4" Fitter Glass					
Item Number	340010	340011	340012	340114	340121	
Glass	Satin Etched Cased Opal	White Vetro Mica	Cased White Water	Frosted Ribbed	White Alabaster	
Dimensions	5.25" Width 5.00" Height	5.25" Width 5.00" Height	5.25" Width 5.00" Height	4.50" Width 5.00" Height	5.00" Width 5.25" Height	



Item Number	340129*	340130*	340131*	340128	340133
Glass	Pine Bark	White Linen	Mocha Wisp	White Alabaster	Clear/Etched
Dimensions	4.25" Width 4.50" Height	4.25" Width 4.50" Height	4.25" Width 4.50" Height	5.25" Width 4.75" Height	4.75" Width 5.25" Height

Canfield[™] Outdoor Blade Kits For use exclusively with Canfield[™] Weather+[™] Motor Assembly 52"/54"/56" (320500) and Canfield XL Patio 60" (310193) Outdoor/Indoor ceiling fans. 🕲 Select blades are wet rated, for installation in open porches and patios, or anywhere that is exposed directly to water spray or rain. All are constructed from durable ABS plastic to resist weathering of the outdoor elements. D Optional hand-carved, solid wood blades feature a moisture-resistant coating, appropriate for covered patios, verandas and other areas protected from direct exposure to the elements. Accessory Blade Kits – Wet 370021 370022 370034 Item Number Finish White Washed Oak Dark Weathered Brown Rattan All-Weather ABS Blades All-Weather ABS Blades All-Weather ABS Blades W W W Notes 52" Blade Sweep 52" Blade Sweep 54" Blade Sweep Accessory Blade Kits – Wet Item Number 370035 371010 371011 Finish Ivory with Walnut Highlights Antique Satin Silver Coffee Mocha W All-Weather ABS Blades All-Weather ABS Blades All-Weather ABS Blades W Notes 54" Blade Sweep 52" Blade Sweep 52" Blade Sweep Accessory Blade Kits – Wet 371012 371013 371015 Item Number Finish Satin Black Satin Natural White Light Walnut/Dark Walnut All-Weather ABS Blades All-Weather ABS Blades All-Weather ABS Blades, W W W Notes 52" Blade Sweep 52" Blade Sweep Reversible, 52" Blade Sweep Accessory Blade Kits – Wet 371017 371019 371024 Item Number Aged White Finish Walnut Shadowed Satin Natural White W All-Weather ABS Blades W All-Weather ABS Blades W All-Weather ABS Blades Notes 52" Blade Sweep 52" Blade Sweep 52" Blade Sweep



Canfield[™] Weather+[™] 320500CMO Coffee Mocha Finish with Ivory with Walnut Blades | Page 110 Shown with 370035 Ivory with Walnut Highlights ABS Blades | Page 288


Canfield[™] Indoor Blade Kits

Indoor dry-rated blades for use exclusively with Canfield 52" (300117) and Canfield Pro LED 52" (330013) fans

		:.
	Solid Wood Indoor Blade Ki	ts – Canfield & Canfield Pro
Item Number	371031	371040
Finish	Shadowed Walnut	Silver/Black
Notes	Solid Wood Blades 52" Blade Sweep	Solid Wood Blades, Reversible 52" Blade Sweep

Dual-Threaded Downrods

1" O.D. extension downrods.

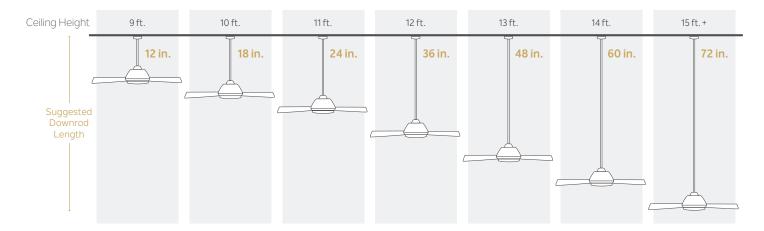


Finish Options	12"	18"	24"	36"	48"	60"	72"
AP	360000	360001	360002	360003	360004	360005	360006
Antique Pewter	AP						
AVI	360000	360001	360002	360003	360004	360005	360006
Anvil Iron	AVI						
BAB	360000	360001	360002	360003	360004	360005	360006
Burnished Antique Brass	BAB						
BSS	360000	360001	360002	360003	360004	360005	360006
Brushed Stainless Steel	BSS						
СМО	360000	360001	360002	360003	360004	360005	360006
Coffee Mocha	СМО						
DBK	360000	360001	360002	360003	360004	360005	360006
Distressed Black	DBK						
MDW	360000	360001	360002	360003	360004	360005	360006
Mediterranean Walnut™	MDW						
MWH	360000	360001	360002	360003	360004	360005	360006
Matte White	MWH						
NBR	360000	360001	360002	360003	360004	360005	360006
Natural Brass	NBR						
NI	360000	360001	360002	360003	360004	360005	360006
Brushed Nickel	NI						
OBB	360000	360001	360002	360003	360004	360005	360006
Oil Brushed Bronze™	OBB						
OLZ	360000	360001	360002	360003	360004	360005	360006
Oiled Bronze	OLZ						
OZ	360000	360001	360002	360003	360004	360005	360006
Olde Bronze [®]	OZ						
PN	360000	360001	360002	360003	360004	360005	360006
Polished Nickel	PN						
SBK	360000	360001	360002	360003	360004	360005	360006
Satin Black	SBK						
SNB	360000	360001	360002	360003	360004	360005	360006
Satin Natural Bronze	SNB						
TZP	360000	360001	360002	360003	360004	360005	360006
Tannery Bronze [™] Powder Coat	TZP						
WCP	360000	360001	360002	360003	360004	360005	360006
Weathered Copper	WCP						
WH	360000	360001	360002	360003	360004	360005	360006
White	WH						
WN	360000	360001	360002	360003	360004	360005	360006
Walnut	WN						
WSP	360000	360001	360002	360003	360004	360005	360006
Weathered Steel	WSP						
WZC	360000	360001	360002	360003	360004	360005	360006
Weathered Zinc	WZC						

AUB fan finish includes DBK (Distressed Black) downrod BAP fan finish includes AP (Antique Pewter) downrod



Imari 300365SBK Satin Black Finish with Weathered White Walnut Blades | Page 88 Shown with 360001SBK 18" Downrod | Page 290

Fan Finish Swatch Guide

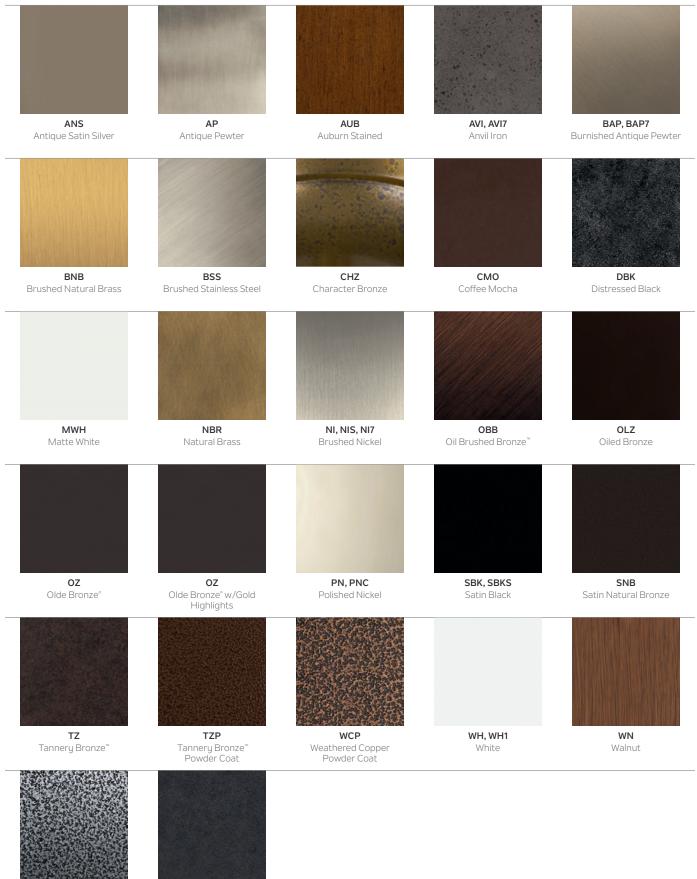

WSP Weathered Steel Powder Coat

WZC Weathered Zinc

Symbol Guide & Notes

	I.	Notes	C
LED	Integrated LED	Wattages stated are the maximum recommended; however, you may use lower	F€ in
	Dimmable	wattage lamps to suit your lighting needs. Some recommended lamps are not available in the maximum allowable wattage.	Th In De
AC	AC Motor	• All electrical products are rated as 120-volt, AC unless otherwise noted.	lig lig to
DC	DC Motor	 All electrical products are certified and listed to UL/CSA/ETL Standards for use in U.S.A. and Canada except where noted. 	in st Ja in
V	Reversible Blades	 All products featured in the outdoor section are certified and listed to UL/CSA/ETL standards for wet location except where noted. 	Lig fro 40 ar
Energy STAR	Energy Star®	 On some products, in order to accommodate higher-than-normal ceiling height, extra lead 	ap cc
D	Damp-rated	wire is supplied and specified. With additional sections of chain or stems (not included), this allows an added measure of design flexibility.	In ef bu (s
W	Wet-rated	 Finishes for fixtures installed outdoors are subject to change due to prolonged exposure to sunlight, airborne pollutants, and other 	ar ar M
W+	Weather+™	 forms of weathering. To serve you better, Kichler Lighting reserves the right to make improvements to the products in this catalog. Therefore, some products may change during the life of the catalog and the product information contained in this catalog may also have changed. 	m lig to lig flu Re
			ar

Consumer Notice

ederal Legislation to phase out 100 watt ncandescent bulbs started January 2012.

The federal government enacted the Energy ndependence and Security Act of 2007 in December 2007, requiring all general-purpose ght bulbs that produce 310-2600 lumens of ght be 30% more energy efficient (similar o current halogen lamps) than current ncandescent bulbs by 2014. The efficiency tandards started with 100 watt bulbs in anuary 2012 and will end with 40 watt bulbs n January 2014.

ight bulbs outside of this range are exempt rom the restrictions (historically, less than 0 watts or more than 150 watts). Also exempt are several classes of specialty lights, including ppliance lamps, rough service bulbs, 3-way, olored lamps and plant lights.

n 2020, a second tier of restrictions will become effective; which requires all general-purpose pulbs to produce at least 45 lumens per watt similar to current CFLs). Exempt from the Act are reflector flood, 3-way, candelabra, colored and other specialty bulbs.

Aany governments worldwide have passed neasures to prohibit the sale of incandescent ght bulbs for general lighting. The aim is o encourage use of more energy-efficient ghting alternatives, such as compact luorescent lamps (CFLs) and LED lamps.

References: www.energy.senate.gov

Ne go to great lengths to assure the metal and glass finishes shown in the catalog match the actual products, but printing variations and variations in chemical finishes and the nature of hand-applied finishing will cause some differences between the printed images and actual product, and from one product to another.

We use only non-ferrous materials on the exterior parts of our outdoor lantern products, and use the best available weather-resistant finishes. However, due to some extreme environmental conditions such as acid rain, salt air and ultraviolet exposure, we cannot guarantee our exterior finishes, with the exception of our LifeBrite[™] fixtures.



Federal Communications Commission devices designated with this logo comply with part 15 of the FCC Rules



All electrical products are UL/CSA/ or ETL Listed and Certified to UL/CSA Standards for use in U.S.A. and Canada except where noted.



Kichler is a member of the American Lighting Association (ALA), a trade association representing the residential lighting and ceiling fan industries in the United States and Canada. Its membership includes leading lighting and fan manufacturers, showrooms (retailers), manufacturers representatives and designers. ALA members are dedicated to providing the public with the proper application of quality residential lighting.

For warranty information visit Kichler.com/Warranty



CONNECT WITH US



instagram.com/KichlerLighting facebook.com/Kichler.Lighting twitter.com/KichlerLight houzz.com/pro/KichlerLighting/Kichler pinterest.com/KichlerStyle youtube.com/KichlerLighting linkedin.com/company/KichlerLighting

Kichler Lighting LLC 30455 Solon Rd. Solon, Ohio 44139 Kichler.com

To find an Authorized Dealer, visit Kichler.com/Where-to-buy



Advanced product solutions (aps) Technical Support

We're here to support you with all your pre-and post-installation questions. From motors and blades to controls and accessories; we can guide you with complete step-by-step instructions and troubleshooting tips.

Contact our APS team at **844-KICHLER (844-542-4537)** or email **techsupport@kichler.com**.

Abbreviation Key

A.C.	Altornating Current
	Alternating Current Americans with Disabilities Act
ALM	
Amp	_
	Color Temperature
	Cubic Feet Per Minute
CLR	
	Color Rendering Index
D	Depth
dB	Decibel
DC	Direct Current
Dia.	Diameter
Ft	Feet
GA	Gauge
Н	Height
hrs	Hours
I.D	Inside Diameter
IV	Ivory
К	Kelvin temperature
L	Length
LED	Light Emitting Diode
lm	Lumens
lm/W	Lumens per Watt
Max	Maximum
mm	Millimeter
MUL	Multiple Finishes
N/A	Not Applicable
NPSM	National Pipe & Thread - Straight, Male
	Outside Diameter
RPM	Revolutions Per Minute
Sq. Ft	Square Feet
V	
VA	Volt-Amp
	Watt, when directly next to a number
	Width, when paired with L and/or H
Thd.	

Left: Rise 300370NI Brushed Nickel Finish with Walnut Blades | Page 36

Index

300026	230	310181	138	339013	160	371065	276
300027	126	310192	244	339218	120	371075	279
300031	222	310193	242	339224	118	371082	276
300032	184	310204	136	339413	158	371085	276
300040	114	310206	156	339501	246	380010	283
300041	116	310239	130	339629	106	380011	285
300044	34	310240	128	340010	287	380012	285
300052	124	310360	174	340011	287	380013	285
300059	84	320500	110	340012	287	380014	285
300060	166	330000	142	340114	287	380015	285
300103	240	330001	212	340115	287	380016	285
300107	238	330002	210	340116	287	380017	285
300117	236	330010	218	340121	287	380018	285
300160	188	330013	232	340126	287	380030	284
300168	186	330015	272	340127	287	380031	284
300188	234	330016	262	340128	287	380032	284
300206	154	330017	264	340129	287	380033	284
300230	190	330018	268	340130	287	380041	286
300238	152	330019	260	340131	287	380356	92
300241	62	330020	266	340133	287	380911	283
300250		330020	270	340135	287	380912	283
300253	104	330021	220	350015			282
	202				286	380915	
300265	60	330043	80	350210	286	380930	282
300270	172	330045	80	360000	290	380931	282
300275	208	330057	76	360001	290	380945	282
300285	58	330089	170	360002	290	380949	282
300300	68	330090	168	360003	290	380952	282
300301	66	330140	196	360004	290	380011	270
300325	42	330150	182	360005	290	380012	270
300345	26	330151	180	360006	290	380013	270
300352	200	330152	178	370005	276	380014	270
300356	92	330160	256	370006	276	380015	270
300365	88	330161	252	370010	279	380016	270
300370	38	330162	250	370011	279	380017	270
300395	30	330163	248	370021	288	380018	270
300415	46	330164	254	370022	288	380030	269
300457	140	330165	258	370032	278	380031	269
300700	164	330171	228	370034	288	380032	269
300710	176	330174	226	370035	110, 288	380033	269
310017	192	330180	224	370036	279	380041	272
310018	194	330241	148	370038	277	380903	266
310072	134	330242	146	370039	277	380911	268
310073	72	330243	144	370040	278	380912	268
310075	50	330247	216	371010	288	380915	266
310080	54	330347	214	371011	288	380930	267
310100	132	337001	277	371012	288	380931	267
310103	162	337005	280	371013	288	380945	266
310112	102	337007	280	371015	288	380949	266
310115	100	337008	280	371017	288	380950	266
310126	96	337009	277	371019	288	380952	266
310130	98	337010	278	371024	288		
310150	108	337010	278	371024	289		
310152	206	337012	278	371040	289		
310155	150	337214	278	371040	276		
310165	204	338200	284	371042	276		
310170	198	338629	283	371043	276		
510170	190	330023	203	571002	270		

OUR VISION

At Kichler Lighting, everything we do, every single day, is with the intention of creating and delivering products that allow people to see what matters most to them. We will do that by relentlessly pursuing quality, ensuring continued innovation, always going one step further in our commitment to exceptional customer service and education, as well as creating on-trend designs that are both stylish and "life-stylish," promising to deliver project success for you.

Get inspired at Kichler.com

KICHLER

Featured on Front Cover: 300395SBK Icon Ceiling Fan | Page 30

Catalog No. K422 | Printed in U.S.A., SI21012-35M | For more information call: 866-558-5706 © 2022 Kichler Lighting LLC. All Rights Reserved. The majority of newer Kichler fixtures are U.S. Patent Pending.