

# Assembly Instruction Sheet #IS-NA1510BN

## For Style NA1510BN

Quozel, Inc.  
 6 Corporate Parkway  
 Goose Creek, SC  
 29445

Customer Service  
 Phone 631.273.2700  
 Fax 631.231.7102  
 www. quozel. com

**Tools Required:** Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

**Bulb Recommended:** (1) Medium Base Bulb 100W Maximum

**Estimated Assembly Time:** 20-30 minutes

**Preparation:** Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.



### Warnings and Cautions


Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal. Do not subject glass parts to any shock while in operation or shattering may result.

### Package Contents

Part	Description	Quantity
A	Crossbar	1 pc.
B	Mounting Screw	2 pcs.
C	Lock Washer	2 pcs.
D	Hex Nut	2 pcs.
E	Lock Ball	6 pcs.
F	Ceiling Canopy	1 pc.
G	6" Rod	1 pc.
H	6" Rod with Nipple	1 pc.
I	12" Rod	2 pcs.
J	Socket Assembly	1 pc.
K	Glass Shade	1 pc.
L	Metal Shade	1 pc.




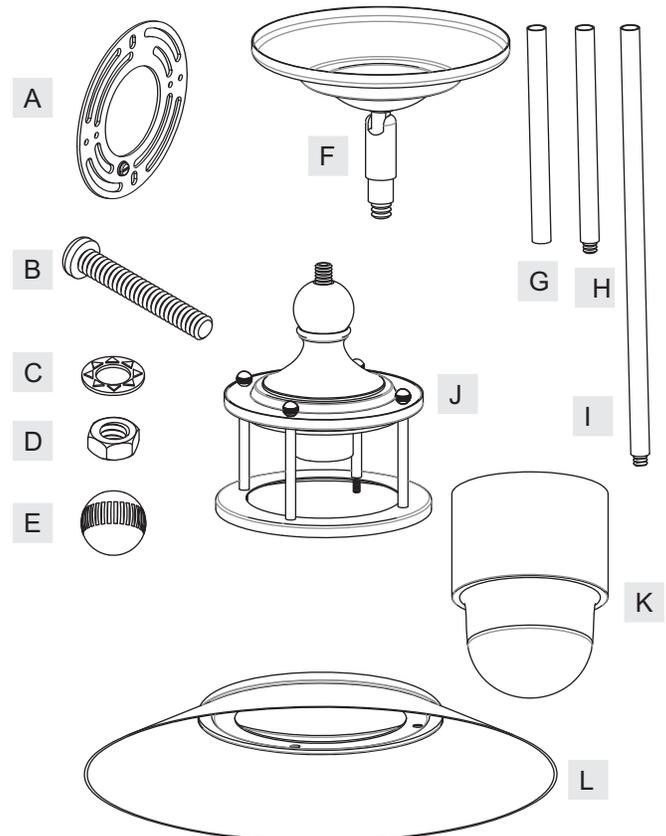


**Thank you for purchasing a Quozel product.**

**Need assistance with parts or assembly? Call Quozel customer service at 1-631-273-2700 or visit us on-line at [www. quozel. com](http://www. quozel. com)**

NA1510BN

FINISH: BRUSHED NICKEL

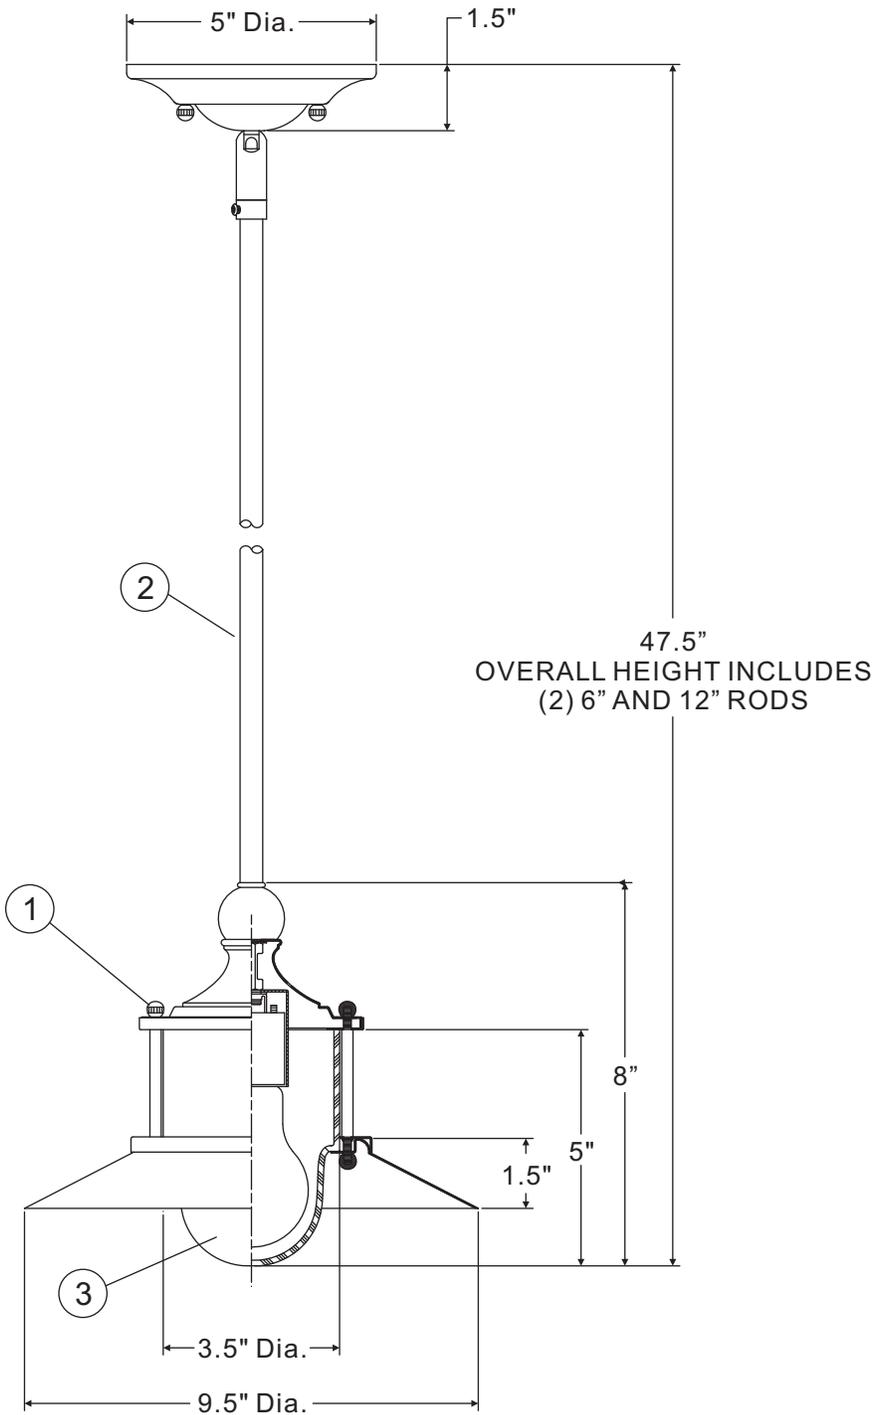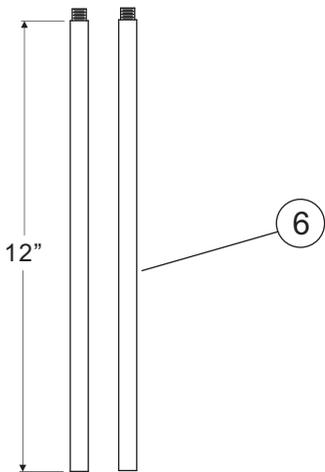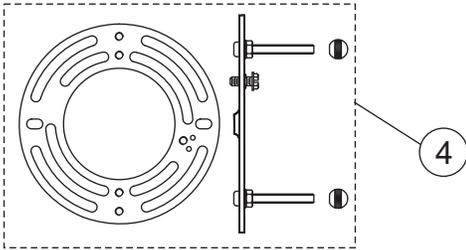

47.5"  
OVERALL HEIGHT INCLUDES  
(2) 6" AND 12" RODS



(1)100W Medium  
Base Bulb  
(Not Supplied)

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/2"

NO.	PART NUMBER	REPLACEMENT PART DESCRIPTION	REQ.
1	M2409BLBN	BALL BRUSHED NICKEL 9MM H X 9MM D	8
2	11510BNN	BASE BRUSHED NICKEL MINI PENDANT	1
3	G1620SH	GLASS ETCHED 5H X 4D	1
4	9306KIT	MOUNTING HARDWARE BRUSHED NICKEL 5"D	1
5	9006EXBN	ROD EXT BRUSHED NICKEL 6"L X 0.5"D	2
6	9012EXBN	ROD EXT BRUSHED NICKEL 12"L X 0.5"D	2


# Assembly Instruction Sheet #IS-NA1510BN

## For Style NA1510BN

### STEP 1 – Assemble Rods

- Determine the Rods (G/H/I) to be assembled to the Socket Assembly (J) according to your hanging height.
- Pass Supply Wires and Ground Wire through the chosen Rods (G/H/I) and then thread the chosen Rods (G/H/I) and the Socket Assembly (J) together. Hand tighten until snug.


Figure 1

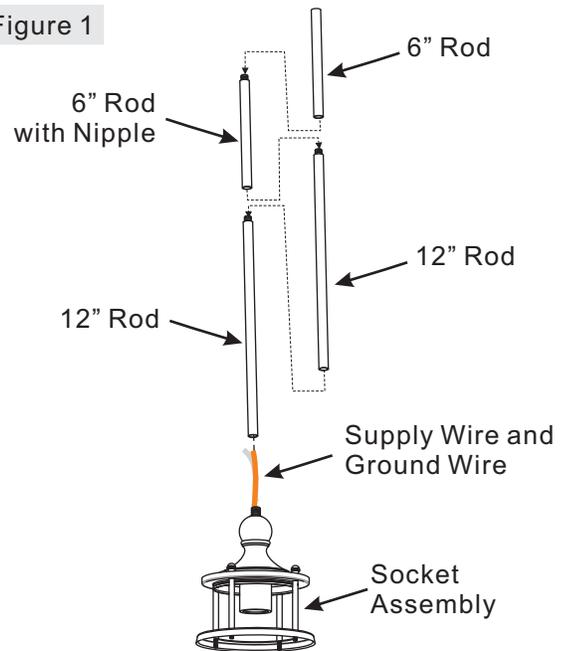

### STEP 2 – Assemble Ceiling Canopy to Upper Rod


- Pass Supply Wires and Ground Wire through the Ceiling Canopy (F) and then thread the Ceiling Canopy (F) and the Upper Rod together. Hand tighten until snug.

Figure 2

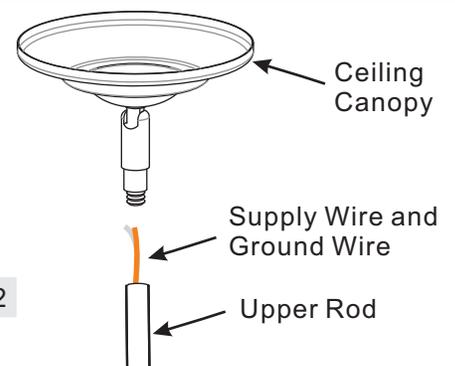

### STEP 3 – Attach Mounting Screws, Lock Washers and Hex Nuts to Crossbar

- Line up a set of holes on the Crossbar (A) and Holes on the Ceiling Canopy (F).
- Thread Mounting Screws (B) into the holes on the Crossbar (A), pass Lock Washers (C) and thread Hex Nut (D) onto the Mounting Screws (B). Hand tighten until snug.

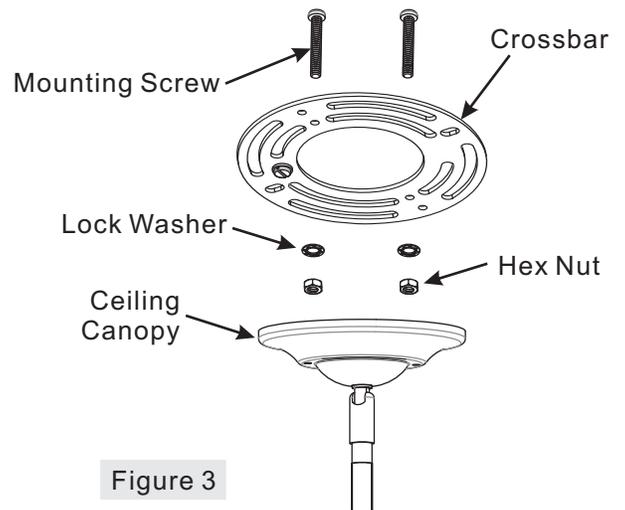

Thank you for purchasing a Quozel product.

Need assistance with parts or assembly? Call Quozel customer service at 1-631-273-2700  
 or visit us on-line at [www. quozel. com](http://www. quozel. com)

**STEP 4 – Attach Crossbar to Outlet Box**

- A. Attach the Crossbar (A) to Outlet Box and secure by threading Outlet Box Screws (not supplied) into the Mounting Holes on the Outlet Box. Tighten until snug.

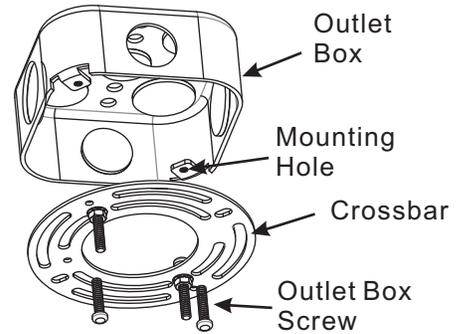


Figure 4

**STEP 5 – Make Wire Connections**

- A. Use standard wire connectors to make all wire connections. (Connectors are not included with fixture.) Strip and prepare wire ends according to instructions supplied with connectors.  
 B. Connect White Supply Wire from the Outlet Box to White Wire from fixture.  
 C. Connect Black (or Red) Supply Wire from the Outlet Box to Black Wire from fixture.  
 D. Connect Ground Wire from the Outlet Box to Ground Wire from fixture.  
 E. Twist connectors until wires are tightly joined together.  
 F. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

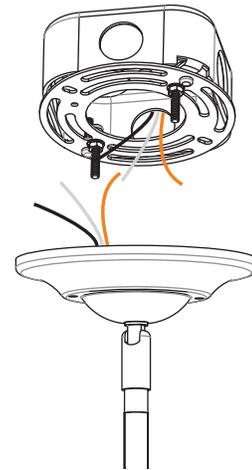


Figure 5

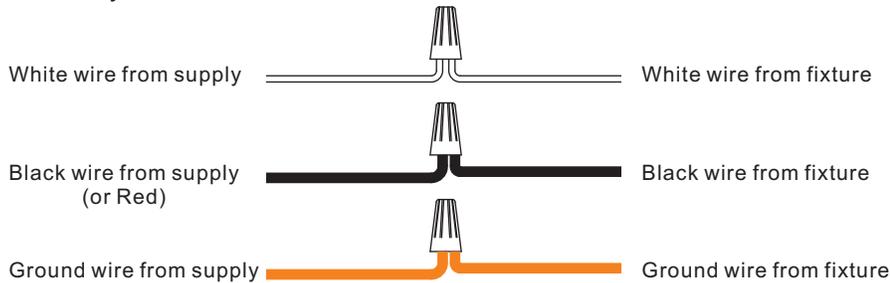


Figure 6

**STEP 6 – Attach Ceiling Canopy to Mounting Screw**

- A. Place the Ceiling Canopy (F) over the Mounting Screws (B) and secure with Lock Balls (E). Hand tighten until snug.

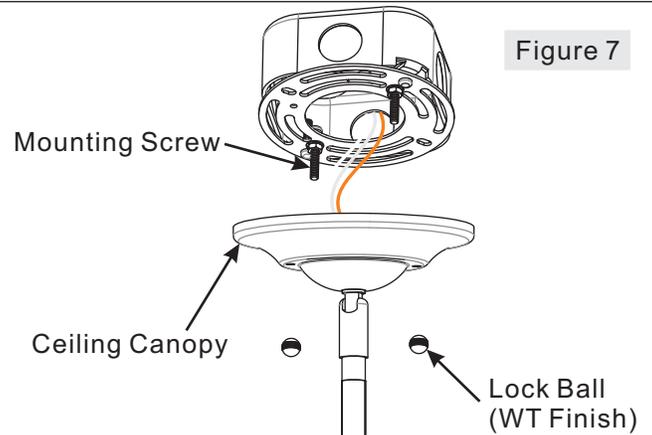


Figure 7


**Thank you for purchasing a Quozel product.**

**Need assistance with parts or assembly? Call Quozel customer service at 1-631-273-2700  
 or visit us on-line at www. quozel. com**

### STEP 7 – Install Bulb

- A. This fixture uses standard bulb with a standard screw base. Maximum 100 watts.
- B. Insert bulb and screw properly into place.

Figure 8

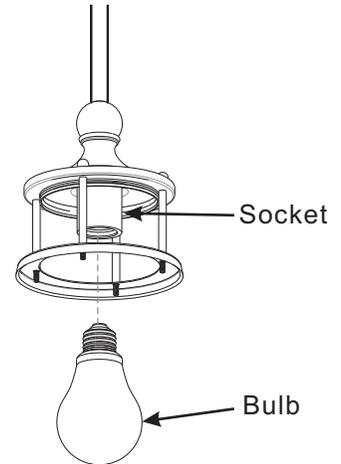


### STEP 8 – Install Shades

- A. Place the Glass Shade (K) over the Bulb. Attach the Metal Shade (L) onto the Glass Shade (K). Pass the holes on the Metal Shade (L) over the Bolts on the Socket Assembly (J). Secure them by threading the Lock Balls (E) onto the Bolts. Hand tighten until snug.

Your fixture is now assembled and ready to use. Enjoy!

Figure 9

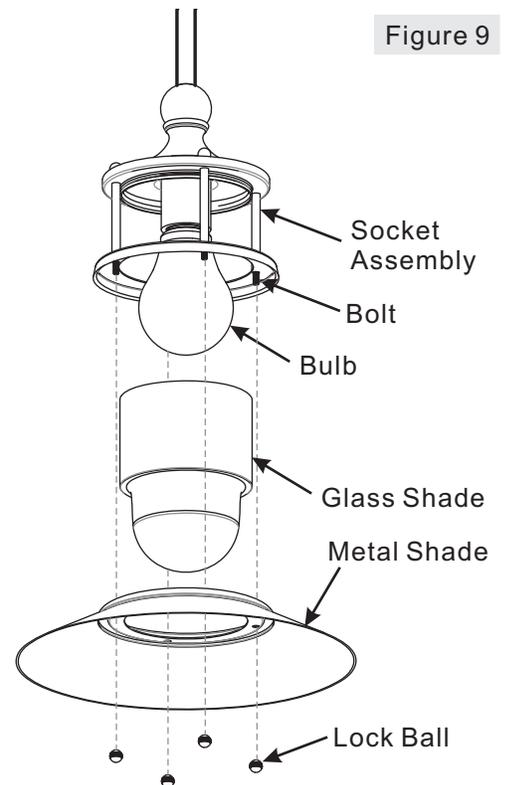

Thank you for purchasing a Quozel product.

Need assistance with parts or assembly? Call Quozel customer service at 1-631-273-2700  
or visit us on-line at [www. quozel. com](http://www. quozel. com)