



WILLOW

12V MINI PENDANTS

location:
DRY

SPECIFICATIONS:

DESCRIPTION

Low voltage mini pendant with handcrafted glass.

LAMPING

LED: 6W integrated lightsource, dimmable.

DIFFUSER

Shade shall be handcrafted glass of Clear decor.

Diameter of 3.5" and height of 13.75"

Opening sizes: 64mm min. (top), 45.5mm min. (bottom)

CORD

Standard cord is 10' field-adjustable coaxial type with teflon jacket and decorative sleeve at the sockholder. Jacket tint coordinates with metal finish. Cords also available in 15' lengths.

STANDARD PENDANT (1XT)

Mini pendant comes complete with either dome-style or flat-style canopy.

QUICK-CONNECT OPTION (1XP)

Quick-Connect Jack is compatible with Besa Rail Adapter, or Quick-Connect canopies (order separately).

METAL FINISH

Glass retainer hardware, sleeve and Quick-Connect Jack and/or canopies are finished in Satin Nickel.


LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).



WILLOW WITH CRYSTAL RODS (PROVIDED)

*Shown with customizable accents

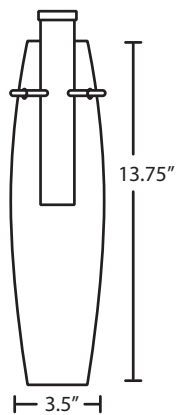

For ordering information, see next page

All dimensions provided are nominal.
Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 10/14



WILLOW

12V MINI PENDANTS


ORDERING:

CONNECTION	GLASS OPTIONS	LAMP OPTIONS	METAL FINISH
Quick-Connect 1XP Flat Canopy	1688WW Crystal Rods	LED 6W LED	SN Satin Nickel
Pendant Fixtures 1XT Flat Canopy			

Ex. 1XP-1688WW-LED-SN
Willow LED Mini Pendant w/ Clear-Crystal Rods,
Satin Nickel Finish

QUICK-CONNECT OPTIONS:


XP Pendant Element Only



- Pendant Shade and Cord/Socket Set
- 10' Field-adjustable braided coaxial-type cord with a teflon jacket (clear or bronze tint coordinates with metal finish)
- Quick-Connect Jack provided
- Compatible with Besa Canopies and Rail Adapter
- Bronze or Satin Nickel metal finishes

FIXED PENDANT OPTIONS:

1XT 1 Light Pendant, Flat Canopy



- Suitable for use on sloped ceilings
- 1x electronic 60W dimmable 120V transformer, fits partially in junction box
- Installs to standard 4" octagonal junction box
- Bronze or Satin Nickel metal finishes

LED 12V MINI PENDANTS:

- LED driver is located in canopy for optimal performance
- Total power of 6 watts
- 450 lumens
- Rated life: 30,000 hours
- CCT: 2800° Kelvin
- CRI: 85+
- Dimmable
- Frosted acrylic diffuser encloses LEDs

Project Information: