


shown in Black with metal blades
and decorative cage



Italo Ventania

Designed in 2007

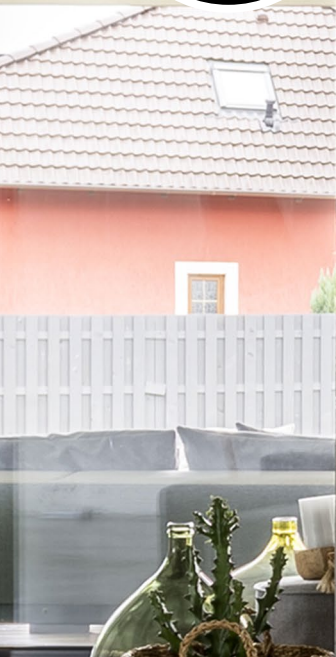

The Italo Ventania is the largest 360° rotational fan in the Matthews Fan Co collection. Its vortex sculpted arms grasp also remarkable, side-mounted fan heads in gentle, equatorial rotation. The fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angle of the motor to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews 360° rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum, heavy spun and stamped steel, the Ar Ruthiane carries a limited lifetime warranty.

Product Features



shown in
Brushed Nickel
with wood blades




shown in
Brushed Nickel
with metal blades
and decorative cage



shown in
Matte Black
with metal blades
and decorative cage



shown in
custom Gold
with metal blades
and decorative cage

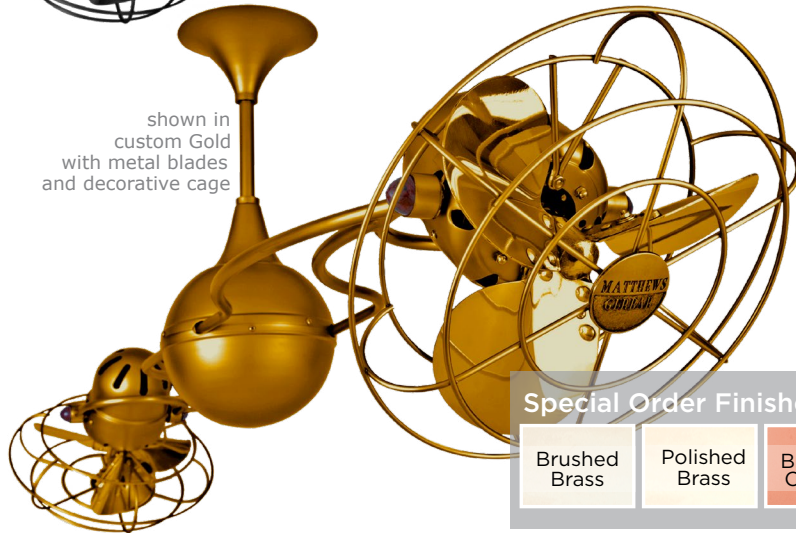

ITALO VENTANIA

FINISH AND BLADE OPTIONS

SKU#	IV-XXXXXX-XXX (Model+Finish+Blade)	
Standard Finishes	Black	BK
	Bronzette	BZZT
	Brushed Nickel	BN
Special Order	Brushed Brass	BRBR
	Brushed Copper	BRCP
	Polished Brass	PB
	Polished Chrome	CR
	Polished Copper	CP
	Polished Chrome Damp	CRDAMP
	Brushed Nickel Damp	BNDAMP
	Gloss White	WH
Fan Blade	Solid Mahogany	WD MTL
	Wood Blade	
	Metal Blade	


TECHNICAL SPECS

Fan Weight	24 lbs
Voltage	110 or 220
Motor Type	AC
Rotation	Yes
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	.75 inch
Overall Drop	14 inches / 36 cm + downrod length
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.
Ambience	Soothing White Noise
Safety Certification	UL / CUL
Warranty	Limited Lifetime


NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Head Options	Solid Mahogany Wood	Metal with Guard
Fan Diameter	62 inches / 157 cm	60 inches / 152 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight tines
RPM (Low / High)	715 / 1209	685 / 1139
CFM (Low / High)	2644 / 4519	1372 / 2278
Watts (High)	91.63	94.76
CFM/Watt (High)	49.32	24.04
Blade Pitch	19°	31°

STANDARD EQUIPMENT


One downrod of 10 inches / 25 cm	
Flat ceiling canopy	
Decora-style, 3-speed wall control in white	
OPTIONAL EQUIPMENT	
29° vaulted ceiling mount and canopy	

Standard Finishes



Special Order Finishes



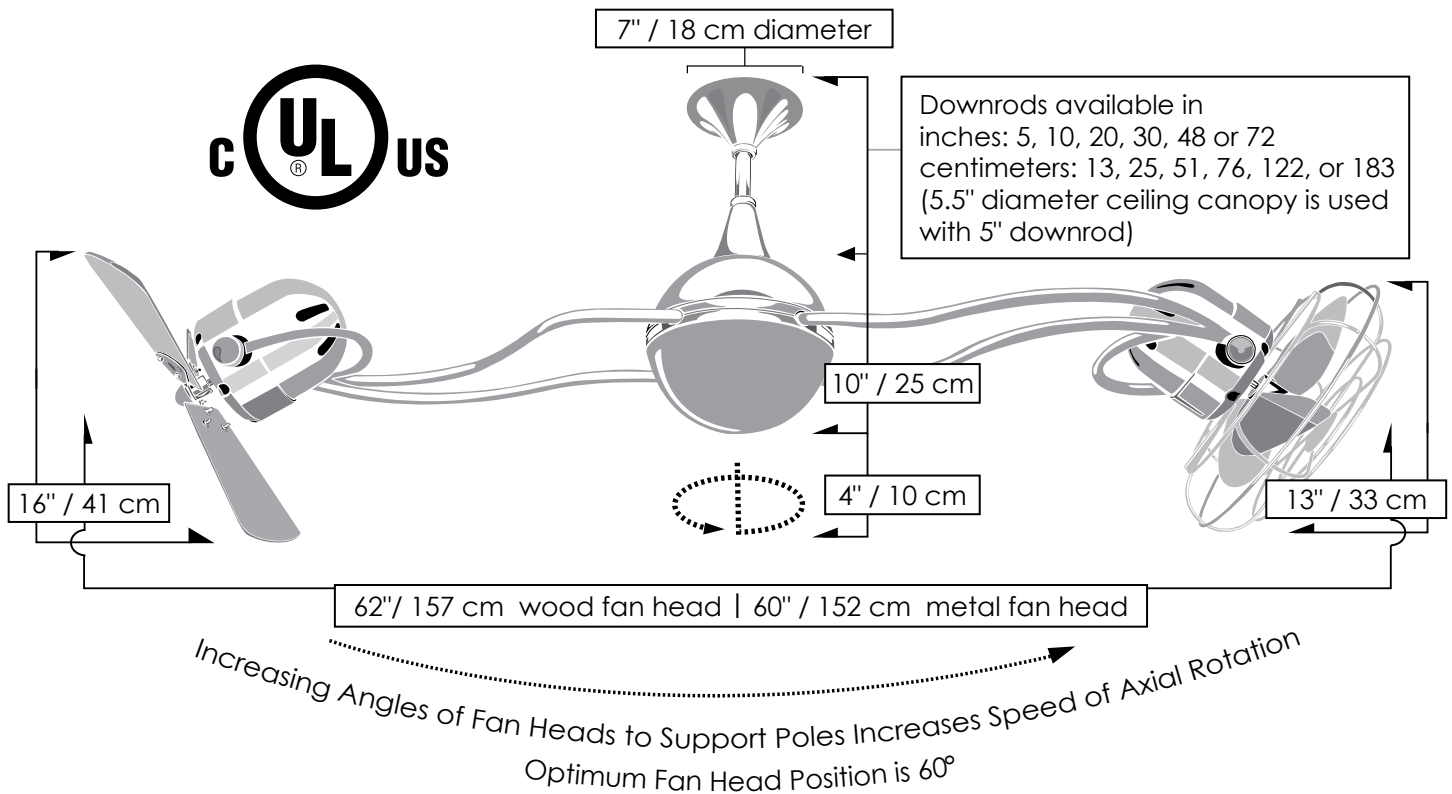

CEILING PITCH TABLE	
0/12	0 degrees
1/12	4.76 degrees
2/12	9.46 degrees
3/12	14.04 degrees
4/12	18.43 degrees
5/12	22.62 degrees
6/12	26.57 degrees
7/12	30.26 degrees
8/12	33.69 degrees
9/12	36.87 degrees
10/12	39.81 degrees
11/12	42.51 degrees

CEILING HEIGHT / DOWNROD TABLE	
Ceiling Height	Downrod Lengths <i>Field cuttable. Non-threaded</i>
10 ft or less	5 inches / 13 cm <i>Use safety cages if applicable</i>
10 -12 feet	10 inches / 25 cm
13 feet	20 inches / 51 cm
14 feet	30 inches / 76 cm
15 feet	48 inches / 122 cm
16 feet +	72 inches / 183 cm