Baxley Wall

AW1051 I.0

GENERATION LIGHTING Wall

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

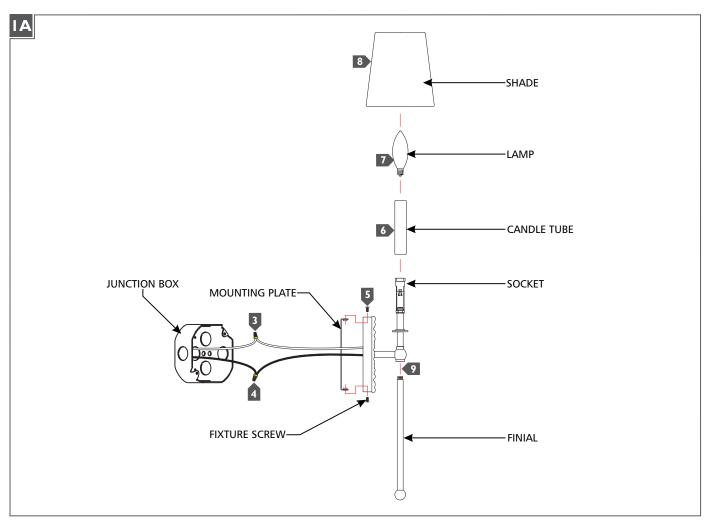

- **I** Secure the mounting plate to the junction box.
- 2 Connect the fixture ground wire to a suitable ground in accordance to local electrical codes.
- 3 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 4 Connect the black fixture wire to the hot power line wire with a wire nut.
- **5** Properly place all wires and wire nut connections into the junction box/fixture base, mount the fixture onto the mounting plate, and secure it in place using the fixture screws.
- 6 Install the candle tube by sliding it over the socket.
- **Z** Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.
- 8 Install the shade by placing it over the lamp.
- 9 Screw the finial to the bottom of the fixture.

SAVE THESE INSTRUCTIONS!

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077 800.969.3347

www.generationlighting.com

© 2019 Generation Lighting All rights reserved. The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.