

JOB NAME \_\_\_\_\_

CONTACT \_\_\_\_\_

ORDERING CODE \_\_\_\_\_

ADA LM-79

## ENCORE Indirect Wall

ORDERING CODE		
SERIES	WALL	indoor wall sconce
TYPE	ENC	Encore up and down, 9.2W, 280lm up, 280lm down
CCT	30K	3000K
CRI	90	90 CRI
VOLTAGE	UNV	120V-277V
DIMMING	ELV <sup>1</sup>	trailing edge dimming to 5%
FINISH	BZ AL	bronze brushed chrome

ORDERING CODE \_\_\_\_\_

Follow the steps to specify your fixture, example:  
**WALL - ENC - 30K - 90 - UNV - ELV - BZ**


**NOTES**  
1. ELV only available at 120V.



AL



BZ

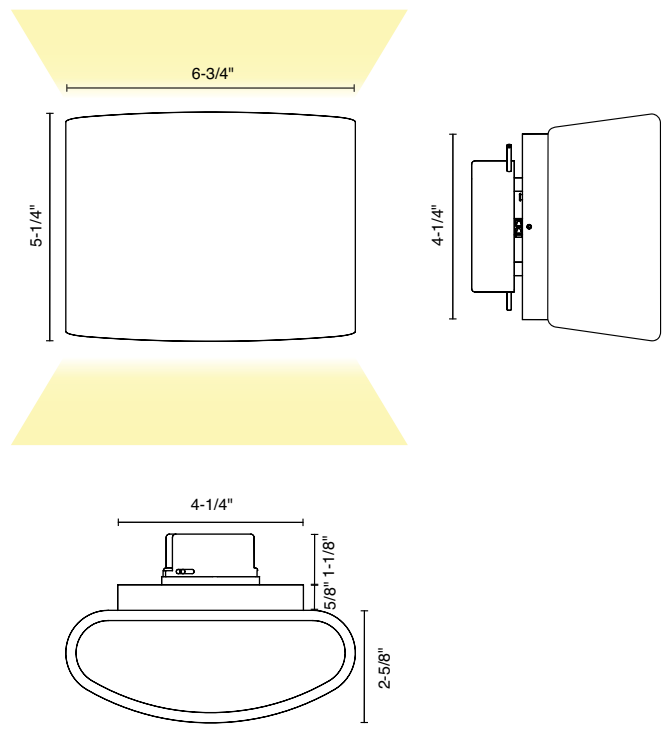

### DESCRIPTION

Encore is an indirect LED sconce made of extruded aluminum with no visible light source from any angle. Its contemporary organic design allows for a modern look with a warm classic glow illuminating the wall from either side of its elliptical body. It is offered in brushed chrome or bronze housing with white inner reflector for horizontal or vertical mounting.

### HOUSING

- Extruded aluminum housing in brushed chrome or bronze. White inner finish on all.

### MOUNTING

- Square base over a 3-1/2" to 4" recessed round junction box

### ELECTRICAL/CONTROLS

- Dimmer: Lutron DVELV-300P

### LISTINGS

- ETLus Listed to UL1598 (suitable for dry location only)
- cETL Listed to CSA C22.2 #250.0 and #9.0
- ADA Compliant

### LED INFO

- LED: Zigen ZGIBGX30KHO
- SDCM: 3-step MacAdam Ellipse
- Lumen Maintenance: L<sub>70</sub> > 50,000 hrs
- Warranty: 5 year limited warranty