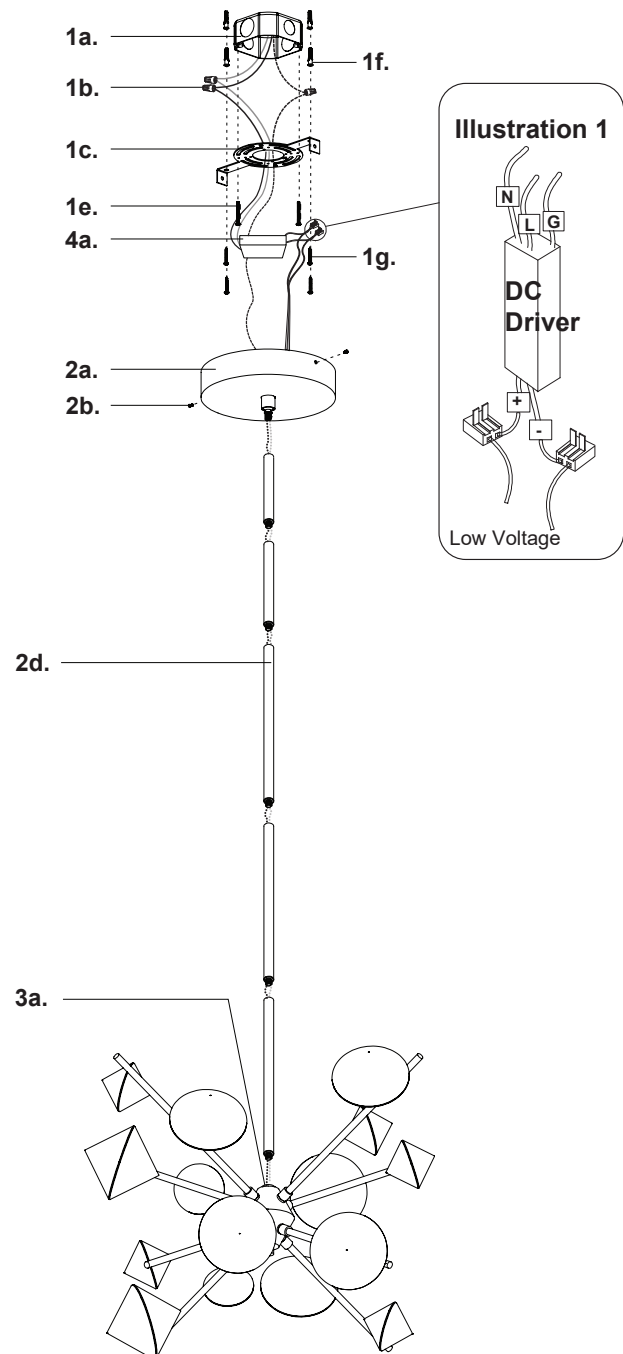# Ceiling LED Chandelier

START FROM HERE

• Make sure **POWER** is **COMPLETELY OFF** at the fuse box
• Have your fixture installed by a qualified licensed electrician
• Prepare everything in a clear area
• Wear gloves at all time during this installation
• Read instructions carefully before you start assembly
• Keep this installation sheet for future reference

Technical Support: 1-855-855-8926

Please Note:
• This Kuzco LED fixture comes with pre-wired LED module(s)
• Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage
• For dimming, an ELV (Electronic Low Voltage) or TRIAC type of dimmer is required
• 120V input

1. Remove fixture from its original package

2. Separate mounting plate **(1c)** from canopy **(2a)** by removing canopy screws **(2b)**

3. Attach mounting plate **(1c)** to electrical junction box **(1a)** using junction box screws provided **(1e)** in hardware package

4. Secure mounting plate **(1c)** to mounting surface with anchors **(1f)** and screws **(1g)**

5. Determine hanging height of fixture by securing rods **(2d)** to canopy **(2a)** and fixture body **(3a)** after feeding fixture wires (LED+ and LED-) through rods

6. Make proper electrical connections between LED and DC driver, LED- Negative, LED+ Positive using quick connector provided **(See Illustation 1 and refer to diagram on driver)**

7. Make proper electrical connections (**black** to **hot** "L", **white** to **neutral** "N", **ground** to **"GND")** with wire nuts **(1b)** provided in hardware package and place driver **(4a)** inside canopy **(2a)**

8. Attach canopy **(2a)** to mounting plate **(1c)** with canopy screws **(2b)**

Illustration 1

N
L G

DC Driver

+
-

Low Voltage

1a.
1f.
1b.
1c.
1e.
4a.
1g.
2a.
2b.
2d.
3a.