## Outdoor

GENERATION LIGHTING

### **GENERAL PRODUCT INFORMATION:**

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for wet locations.


Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

#### **CAUTION - RISK OF FIRE**

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

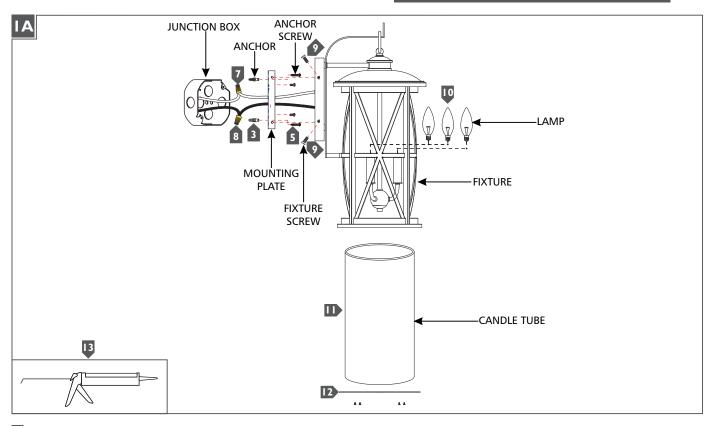

- Temporarily install the mounting plate to junction box.
- 2 Mark the anchor hole locations on the wall and remove the mounting plate.
- 3 Drill appropriate sized holes and install the anchors into the wall.
- 4 Secure the mounting plate to the junction box.
- 5 Screw the anchor screws into the anchors.
- 6 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 7 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 8 Connect the black fixture wire to the hot power line wire with a wire nut.
- 9 Mount the fixture base onto the mounting plate and secure it with the fixture screws.
- Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.
- Install the glass shade by sliding it into the bottom of the fixture.
- Secure the glass in place by installing the bottom cover with the provided screws.
- For wet locations, caulk around the base of the fixture with waterproof construction sealant.

# **SAVETHESE INSTRUCTIONS!**

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077 800.969.3347

# www.generationlighting.com

© 2019 Generation Lighting All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.